

The background of the page is a dynamic, abstract composition of thick, expressive brushstrokes. The primary colors are a vibrant, saturated blue and a clean, bright white. The strokes are layered and curved, creating a sense of movement and depth. The overall effect is modern and artistic, typical of contemporary interior design publications.

oxygen

2021/22

Lighting and Fans



oxygen

SPECIFIER INSTRUCTIONS

THE PRODUCT DIAGRAM

indicates how the measurements of the fixture are determined and contains an approximate "human-scale" drawing of the fixture.

THE SPEC CHART

for each fixture indicates which diffusers are available with each finish as well as lamping information and dimensions. If there are options available they will be indicated along with a sample product number to aid in specifying the options. Specs may be highlighted to help distinguish differences between similar looking products.

GENERAL SPECIFICATIONS

such as housing, trim, diffuser thicknesses and how to obtain additional information from Oxygen.

DEFINITIONS/HOW-TO'S

ITEM # - fixture model number

PREFIX NOTES:

2-597-XXX = fluorescent model (or incandescent)

3-587-XXX = 120V LED or 120/277 UV LED model

32-XXX-XXX = 120/277 UV LED model

MODEL SERIES:

2-**597-XXX** - **597** = Beacon fluorescent series

3-**587-XXX** - **587** = Beacon LED series

DIFFUSER/FINISH:

2-597-**124** = White Cotton (**1**) w/ Satin Nickel (**24**) finish

3-587-**295** = Matte White Acrylic (**2**) w/ Old World (**95**) finish

DIFFUSER - type of diffuser or options available for model.

FINISH - finish/ finishes available for model.

DIMENSIONS - fixture dimensions as indicated in product diagram illustration.

LAMPING - lamp type (incandescent, fluorescent or LED), wattage and other pertinent information for lamp specified.

BALLAST - ballast specifications for fluorescent models.

DRIVER - driver specifications for LED models.

CERTIFICATION - compliance standards mark for fixture model. Also indicates damp/ wet listings, ADA compliance, emergency ballast and energy star items.

SAMPLE SPECIFICATION CHART


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---------------------|--|------------------------------------|---|--------------------|-----------------------------|
| 3-5010-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel 40 Aged Brass | 4.5"(w) x 12.125"(h) x 3.125"(ext) | 1 x 9w, 90CRI 3000k LED 689 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT c ETL us damp |


GENERAL SPECIFICATIONS:


- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 11.3w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.


UNDERSTANDING THE CATALOG

SYMBOLS

 - UL listed for damp locations

 - UL listed for wet locations

 - ETL listed for damp locations

 - ETL listed for wet locations

 - ADA compliant


 - integral battery backup option

 - UL listed

 - ETL listed

 - Damp

 - Wet

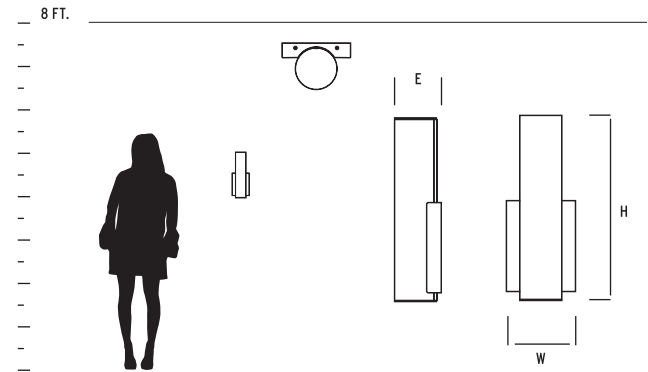

UNDERSTANDING CEILING FANS

FLUSH MOUNT/HUGGER FANS

This type of mount is recommended for 8' ceilings. The National Electric Code requires that all fan blades be a minimum of 7' above the floor.

DOWNROD OPTIONS FOR FANS

For 9' ceilings, a downrod from 4"-8" is installed between the ceiling canopy and the fan. Installing the fan further away from the ceiling allows for more air circulation and fan efficiency. All oxygen fans, with exception of huggers, come with a standard downrod for this application. **For ceilings 10' and above, oxygen offers additional length downrods found on page 248.**

SPECIFIER INSTRUCTIONS

THE PRODUCT DIAGRAM

indicates how the measurements of the fixture are determined and contains an approximate "human-scale" drawing of the fixture.

THE SPEC CHART

for each fan indicates available finishes, blades and options. If there are light kit options available they will be indicated along with a product number to aid in specifying the options. Wall and remote controls will be indicated as well as if they are included or optional.

HEIGHT CHART & FAN HEIGHT

shows the distance from the ceiling to the fan blades and motor.

GENERAL SPECIFICATIONS

will list motor warranty, number of blades, blade sweep and pitch and downrod information.

MECHANICAL SPECIFICATIONS

lists motor type, available options and mechanical performance.


ENERGY SPECIFICATIONS





airflow and energy used on high speed.

DOE ENERGY GUIDE INFORMATION

quick reference of energy specifications.

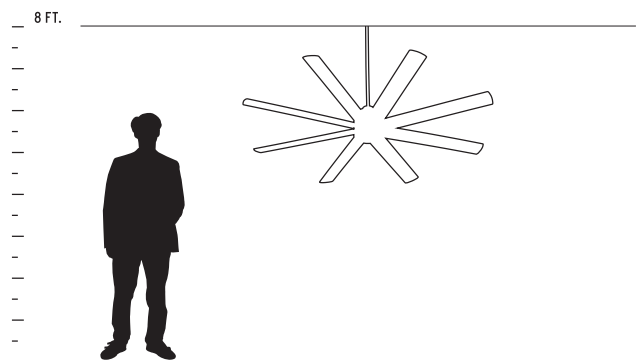SAMPLE SPECIFICATION CHART



| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|----------|--|--|---|--|---|
| 3-100-XX | 6 White* 15 Black* 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel* | White ABS Black ABS Silver Oiled Bronze Silver ABS |  3-9-100 18w, 3000k, 90CRI Dimmable LED, 1247 Delivered Lumens w/ Matte White Glass Diffuser |  Wall Control (included)  3-8-2000-0 Remote Control (optional) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty • Eight Blades • 70° Blade Sweep • 14-Degree Blade Pitch • 80" Lead Wire
- 4" and 6" Downrod (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 165mm DC Motor. • 6 Speeds-Reversible with wall control. • 8 Poles. • .40/.05 AMPS on H/L • 32/3 WATTS on H/L
- 119/49 RPMS on H/L. • Wall Control Included. • Remote Control Adaptable w/ 3-8-2000-0 Remote


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 9448 Cubic Feet/Minute. • Electricity Use: 35 Watts (Excludes Lights). • Airflow Efficiency: 270 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 6832 cfm. • Watts 22. • Airflow efficiency 306 cfm/w. • Estimated yearly energy cost \$6.

HEIGHT CHART



FAN HEIGHT

- Using 4" downrod
- Distance of 13.5"
- Distance of 10.25"

TABLE OF CONTENTS

16 Ceiling Fans

184 Ceiling Mounts

50 Chandeliers

208 Outdoor

64 Pendants

244 Accessories, Diffusers & Finishes

106 Vanities

250 Index

134 Sconces



FAN PERFORMANCE BY ROOM

| ROOM SIZE | SQUARE FEET | ROOM TYPE | FAN SWEEP | CUBIC FEET/MINUTE (CFM) |
|---------------|-----------------------|--|-----------|-------------------------|
| small | 80 sq. ft or less | utility room, bathroom, closet | 20" - 28" | 1500 - 3500 |
| medium | 90-120 sq. ft or less | small bedroom, office, bathroom | 38" - 52" | 3500 - 5000 |
| large | 125-300 sq. ft | kitchen, bedroom, dining room, living room | 52" - 56" | 5000 - 8000 |
| great | 350-400 sq. ft | great room, master suite, outdoor | 56" - 99" | 7000 - 15000 |

VISUAL **TABLE OF CONTENTS**

CEILING FANS



ADORA 18



**ADORA
HUGGER 20**



ALPHA 22



CODA 24



COSMO 26



DYNAMO 28



FLEET 56" 30



FLEET 72" 32



JUNO 34



OLSO 24



OSLO HUGGER 26



PROPEL 28



RONDURE 42



SOL 30




SOLIS 32

VISUAL TABLE OF CONTENTS



TEMPLE 48


CHANDELIERS




ACADIA 52
LED




ATLANTIS 53
LED



BONZO 54
LED




LUSTRE 55
LED

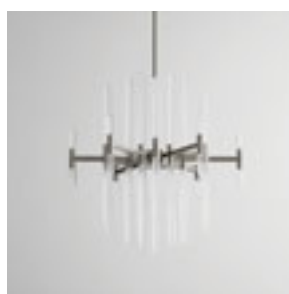

MIRO 56
LED



MOXY 57
LED




NERO 58
LED



PRESTO! 60
LED



TALI 61
LED




UTOPIA 62
LED

PENDANTS



CIRCULO 66
LED



CIRRO 67
LED



CORNET 68
LED



DECCA 69
LED



DIETER 70
LED



DUNE 72



ECHO 73
LED



ELLIPSE 74
LED



GRATIS 76
LED



IDOL 77
LED



KLONE 78
LED



LIBERTY 80
LED



LOTUS 81



LUCCI 82
LED




LUNA 83
LED




LUPE 84
LED



MAGNETA 85
LED




MAGNUM 86
LED



MARIA 87
LED


VISUAL TABLE OF CONTENTS



MONDO 88
LED




NEBULA 90
LED



NERO 92
LED




OPUS 93
LED




PRIMO 94
LED



ROSWELL 95
LED

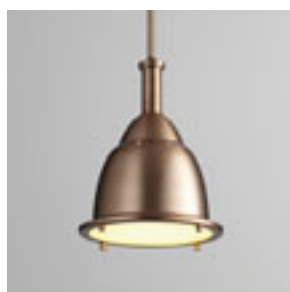

RUVO 96
LED



SPACEY 97
LED




SPINDLE 98
LED



SPIRIT 99
LED



STYLUS 100
LED



TERRA 102
LED



TOTEM 103
LED



VIDA 104
LED



ZEPP 105
LED

VANITIES



ADAGIO 108
ADA | LED



ADELPHI 109
ADA | LED



ALCOR 110
ADA | LED



APOLLO 112
ADA | LED



ARCHER 114
ADA | LED



AXEL 115
ADA | LED



BALANCE 116
ADA | LED



CRESCENT 117
ADA | LED



FUGIT 118
ADA | LED



FUSE 119
ADA | LED



MAGNETA 120
ADA | LED




MAGNUM 121
ADA | LED



METRIX 122
ADA | LED



ORION 124
ADA | LED



PEBBLE 125
ADA

VISUAL TABLE OF CONTENTS



PLATO 126
ADA | LED



SKYLINE 127
ADA



TEMPUS 128
ADA | LED




VEGA 129
ADA | LED



WAVE 130
ADA | LED



ZENITH II 131
ADA | LED



ZORA 133
ADA | LED

SCONCES




ALCOR 136
ADA | LED



APOLLO 137
ADA | LED




AURORA 138
ADA | LED



BEACON 140
ADA | LED



BOLO 141
ADA | LED



CHAMELEON 142
ADA | LED



CRESCENT 144
ADA | LED



DUO 145
ADA | LED



ELLIPSE 146
ADA | LED



EPOCH 148
ADA | LED



FUGIT 149
ADA | LED



HALO 150
ADA | LED



ICON 152
ADA | LED



KIKO 154
ADA | LED




MAGNETA 155
ADA | LED



MAGNUM 156
ADA | LED




METRIX 157
ADA | LED



MIES 158
ADA | LED



MIRAGE 159
ADA | LED



NERO 160
LED



OLIO 162
ADA | LED



OLIO 163
ADA | LED



ORION 164
ADA | LED

VISUAL TABLE OF CONTENTS



PATHWAYS 165
ADA | LED | EM




PEBBLE 166




POLARIS 167
ADA | LED | EM




PROFILE 168
ADA | LED



REFLEX 169
ADA | LED



SIREN 170
ADA | LED



SONGBIRD 171
ADA | LED




TEMPUS 172
ADA | LED



UNO 174
ADA | LED




VEGA 175
ADA | LED




VELA 176
ADA | LED



WAVE 177
ADA | LED




ZEEPERS 178
ADA | LED



ZENITH 180
ADA | LED



ZETA 181
ADA | LED



ZORA 182
LED

CEILING
MOUNTS



ALTAIR 186
ADA | LED



AURORA 187
ADA | LED




DIONE 188
ADA | LED | EM



ECHO 189
LED | EM



ELITE 190
LED



ELLIPSE 191
LED



iO 192
LED | EM



JOURNEY 194
LED | EM




MODULO 196
LED | EM




ORACLE 198
ADA | LED | EM



PEEPERS 200
ADA | LED | EM



PILAR 202
LED



PYXIS 204
ADA | LED



RHYTHM 206
ADA | LED




ZURI 207
ADA | LED

VISUAL TABLE OF CONTENTS

OUTDOOR



APERTO 210
LED




CADET 211
ADA | LED



CALIBER 212
LED



CALYPSO 213
ADA | LED



CERES 214
LED



CORPUS 215
LED



DUO 216
ADA | LED



ELIF 218
ADA | LED



ERIS 219
ADA | LED



ESPRIT 220
LED



HELIO 222
ADA | LED




KALDOR 223
LED



KARME 224
ADA | LED



KUBO 225
LED




LEDA 226
LED | EM



MAGNETA 227
ADA | LED



MAIA 228
ADA | LED



NITRO 230
ADA | LED



NOVA 231
ADA | LED




PAVO 232
ADA | LED




PILOT 233
LED




RAZZO 234
LED




REALM 236
LED




REGIO 237
ADA | LED



RICKIE 238
ADA | LED



SCOPE 239
LED

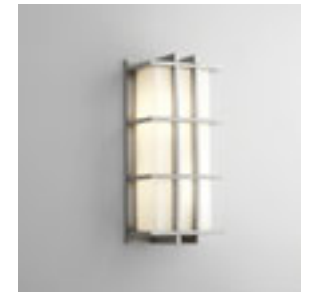

TELSHOR 240
LED | EM



TITAN 242
ADA | LED



UNO 243
ADA | LED






ceiling fans

ADORA 52" CEILING FAN

wet



3-110-24
Wet Listed

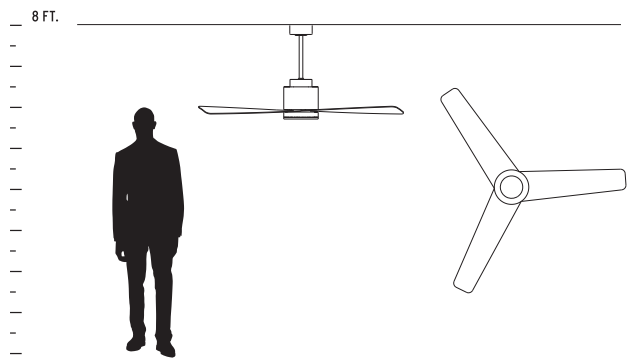



3-110-6



3-110-15
shown with optional light kit 3-9-110-15

| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|----------|--|--|---|--|---|
| 3-110-XX | 6 White 15 Black 24 Satin Nickel | White ABS Matte Black ABS Silver ABS |  3-9-110-XX 18w, 3000k, 90CRI, Dimmable LED, 255 Delivered Lumens w/ Matte White Glass Diffuser Wet Listed |  Wall Control (included) |  |

*3-8-1000-0 remote features 3 fan speeds, forward/reverse function, light kit on/off/dimmer and timer that will turn off the fan after 2, 4 or 8 hours.

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 52" Blade Sweep. • 20-Degree Blade Pitch. • 80" Lead Wire.
- 4" & 6" Downrods (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 153x18 Motor. • 3 Speeds-Reversible with manual reverse switch. • .39/.25 AMPS on H/L. • 47/19 WATTS on H/L.
- 130/76 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 4822 Cubic Feet/Minute. • Electricity Use: 47 Watts (Excludes Lights). • Airflow Efficiency: 102 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 3882 cfm. • Watts 35. • Airflow efficiency 112 cfm/w. • Estimated yearly energy cost \$10.

HEIGHT CHART




FAN HEIGHT
Using 4" downrod
• Distance of 13.45"
• Distance of 11.46"

ADORA 52" HUGGER CEILING FAN



3-111-15

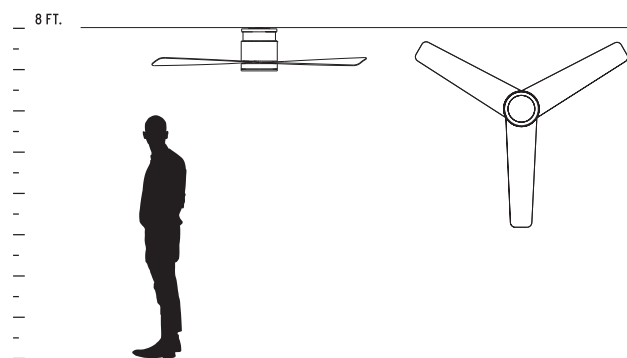



3-111-24



3-111-6
shown with optional light kit **3-9-110-6**

| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROL | CERTIFICATION |
|-----------------|--|--|--|--|---|
| 3-111-XX | 6 White 15 Black 24 Satin Nickel | White ABS Matte Black ABS Silver ABS |  3-9-110-XX 18w, 3000k, 90CRI, Dimmable LED, 255 Delivered Lumens w/ Matte White Glass Diffuser Wet Listed |  Wall Control (included) |  |

*3-8-1000-0 remote features 3 fan speeds, forward/reverse function, light kit on/off/dimmer and timer that will turn off the fan after 2, 4 or 8 hours.

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 52" Blade Sweep. • 20-Degree Blade Pitch. • 22" Lead Wire.

MECHANICAL SPECIFICATIONS:

- 153x18 Motor. • 3 Speeds-Reversible with manual reverse switch. • .39/.25 AMPS on H/L.
- 49/19 WATTS on H/L. • 128/76 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 4268 Cubic Feet/Minute. • Electricity Use: 49 Watts (Excludes Lights). • Airflow Efficiency: 87 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 3407 cfm. • Watts 35. • Airflow efficiency 97 cfm/w. • Estimated yearly energy cost \$10.


HEIGHT CHART



FAN HEIGHT

- Distance of 9.5"
- Distance of 7.5"


ALPHA 60" CEILING FAN

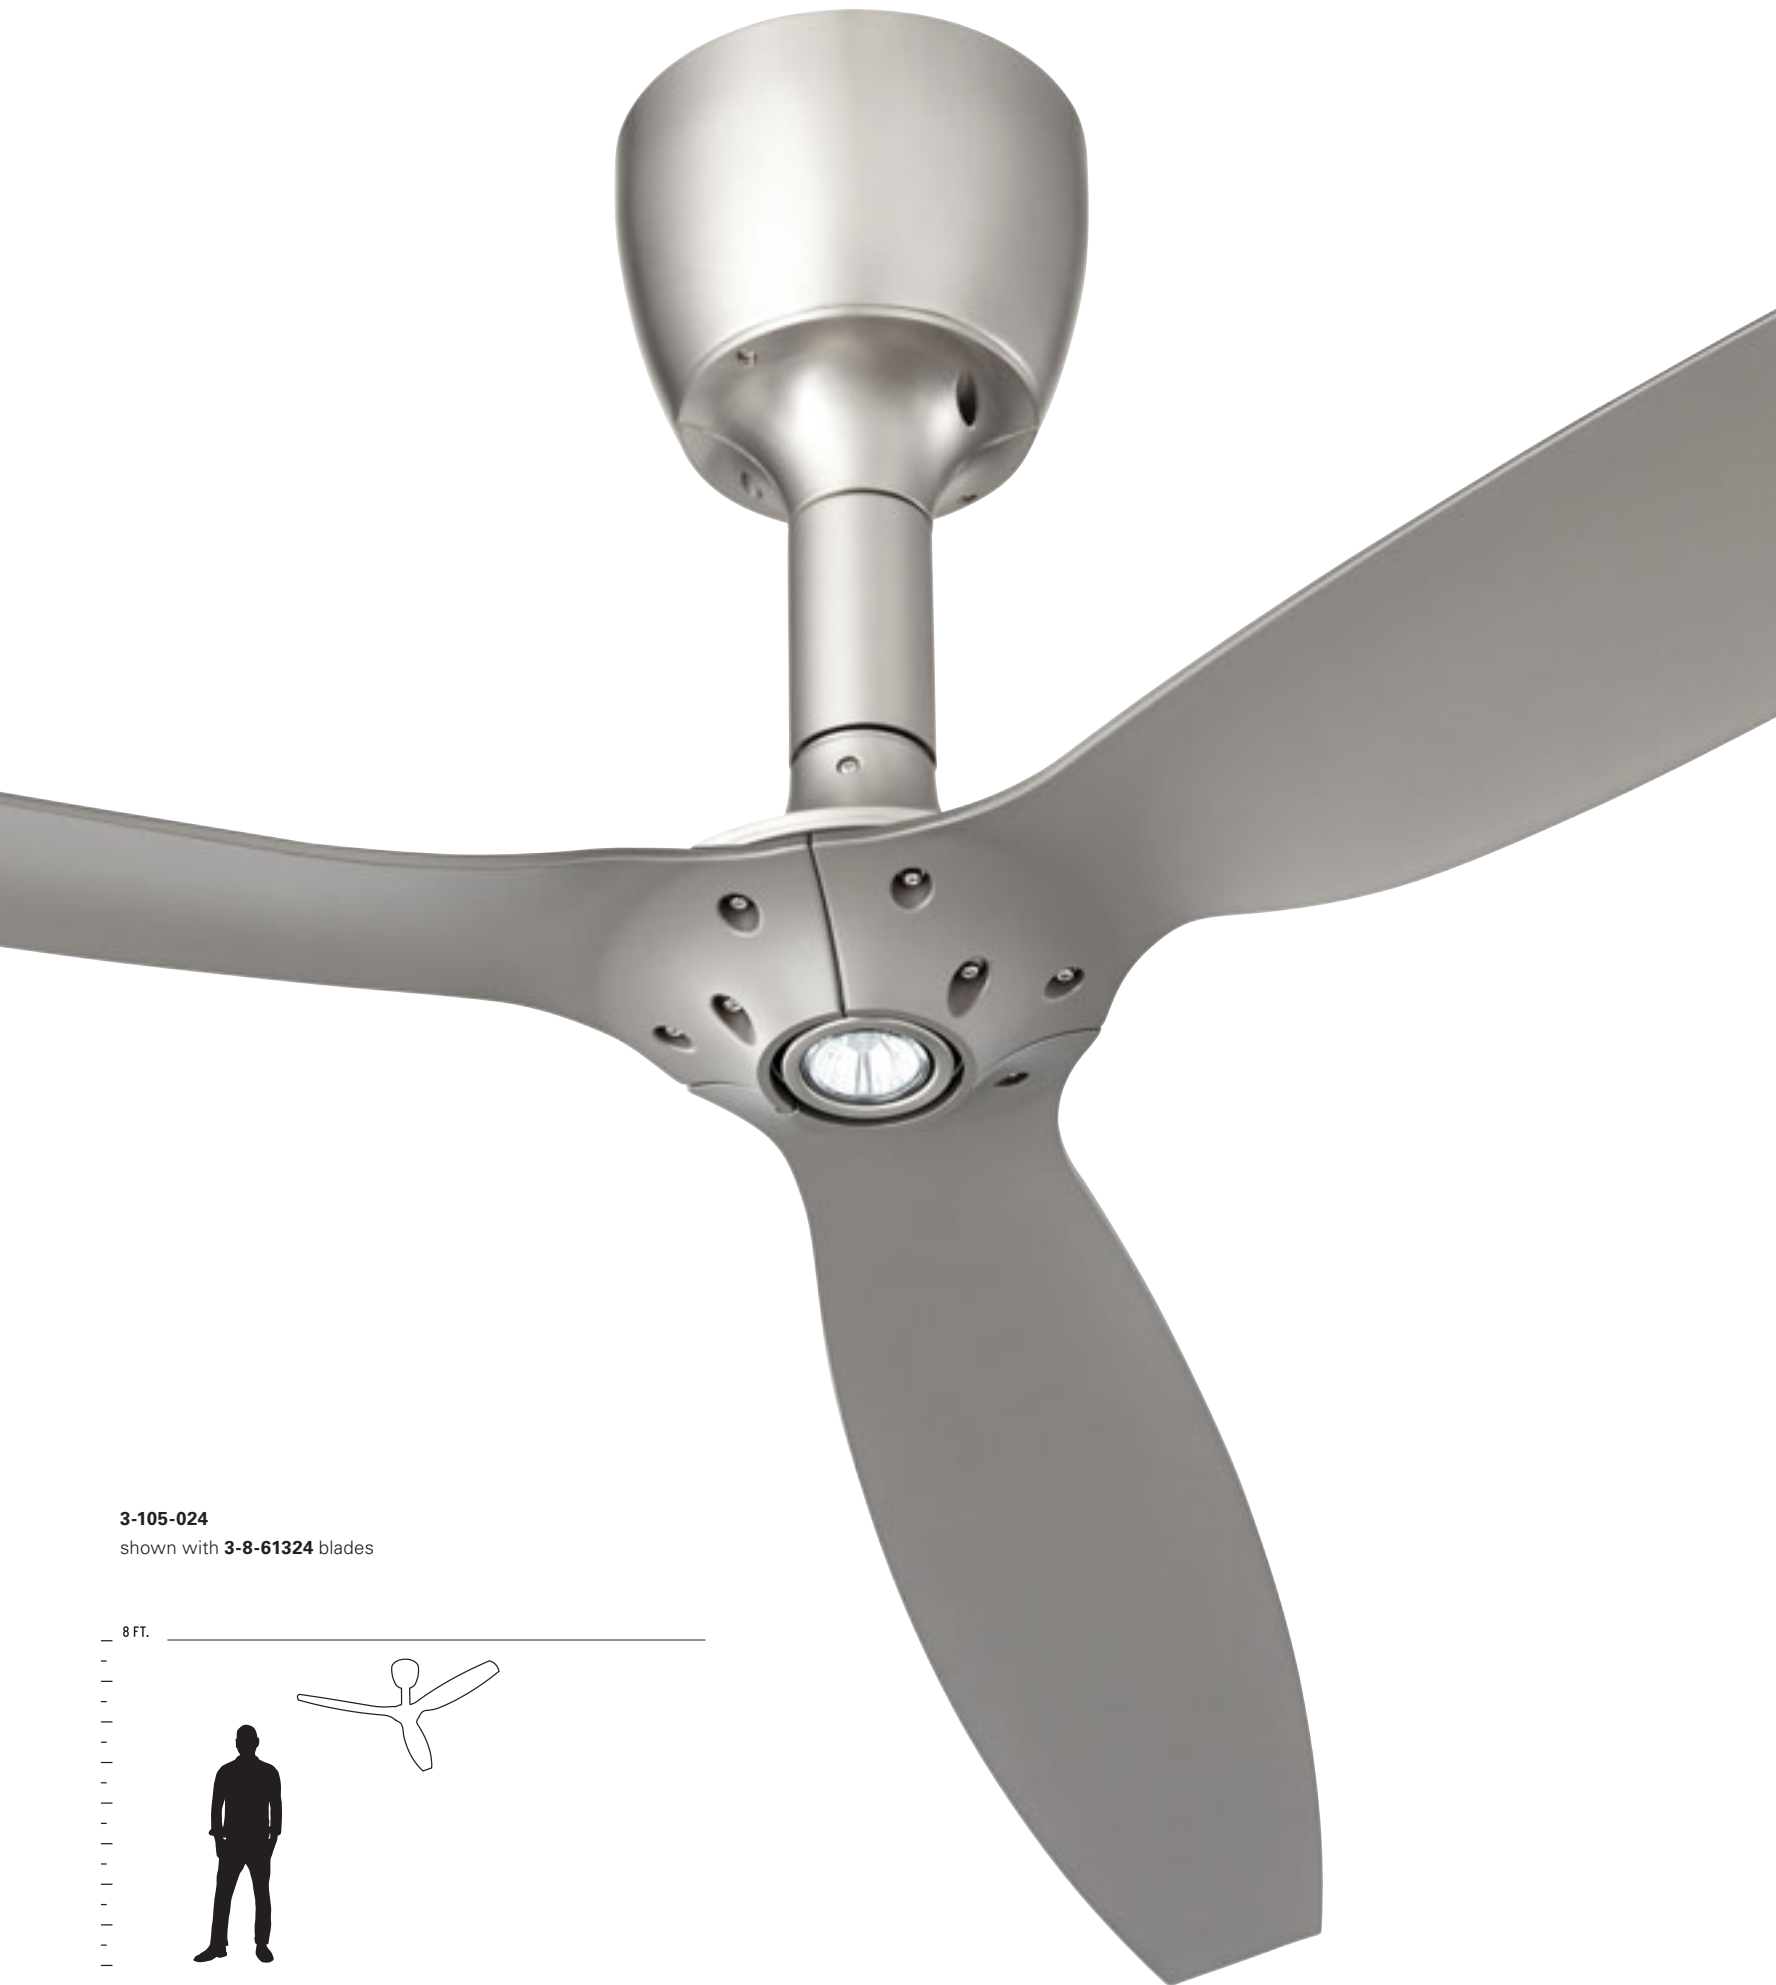





3-105-024

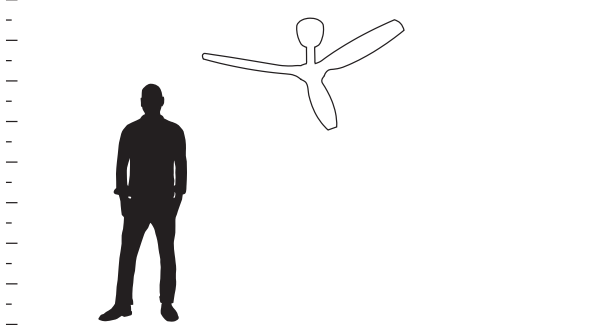shown with **3-8-61324** blades

8 FT.





| ITEM # | FINISH | BLADE SELECTION | OPTIONAL LED LAMP (included) | CONTROLS | CERTIFICATION |
|------------------|---|--|--|---|---|
| 3-105-0XX | 6 White 22 Oiled Bronze 24 Satin Nickel | 3-8-61306 White ABS 3-8-61322 Walnut ABS 3-8-61324 Silver ABS |  7w, 2700k, 80CRI, Dimmable LED GU10 Bulb (Finished Socket Cover Included for use w/o Optional LED Lamp) |  Wall Control (included)  3-8-2000-0 Remote Control (optional) |  |

HOW TO ORDER THE ALPHA FAN:

A. First Pick the Housing/Motor Finish from below:

- 3-105-06** White
- 3-105-022** Oiled Bronze
- 3-105-024** Satin Nickel

B. Then Choose the Blade Finish from below:

- 3-8-61306** White
- 3-8-61322** Walnut
- 3-8-61324** Silver

*Note - Housing/Motor and Blades options will ship separately.

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 60" Blade Sweep. • 18-Degree Blade Pitch. • 58" Lead Wire.

MECHANICAL SPECIFICATIONS:

- 125mm DC Motor. • 6 Speeds-Reversible with wall control. • 12 Poles. • .39/.05 AMPS on H/L • 32/3 WATTS on H/L • 157/50 RPMS on H/L. • Wall Control Included. • Finished socket cover included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 8200 Cubic Feet/Minute. • Electricity Use: 32 Watts (Excludes Lights). • Airflow Efficiency: 256 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 5773 cfm. • Watts 22. • Airflow efficiency 267 cfm/w. • Estimated yearly energy cost \$6.

HEIGHT CHART




FAN HEIGHT

- Distance of 18"
- Distance of 16.25"



CODA 56" CEILING FAN



3-103-24
shown with optional light kit **3-9-102**

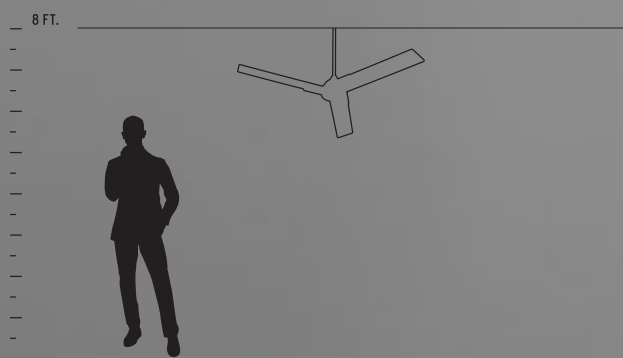



| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|-----------------|---|--|--|--|---|
| 3-103-XX | 6 White 15 Black 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel | White Black Silver Oiled Bronze Silver |  <p>3-9-102 15w, 3000k, 90CRI Dimmable LED, 743 Delivered Lumens w/ Matte White Polycarbonate Diffuser</p> |  <p>Wall Control (included) 3-8-3000 Remote Control (optional)</p> |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 56" Blade Sweep. • 13.5-Degree Blade Pitch. • 80" Lead Wire.
- 4.5" Downrod (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 120mm DC Motor. • 6 Speeds-Reversible with wall control. • 8 Poles. • .43/07 AMPS on H/L • 26/3 WATTS on H/L
- 169/74 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 5238 Cubic Feet/Minute. • Electricity Use: 28 Watts (Excludes Lights). • Airflow Efficiency: 187 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 3815 cfm. • Watts 18. • Airflow efficiency 208 cfm/w. • Estimated yearly energy cost \$5.

HEIGHT CHART



- FAN HEIGHT**
Using 4.5" downrod
- Distance of 11.5"
 - Distance of 9.125"


COSMO 70" CEILING FAN

damp







damp

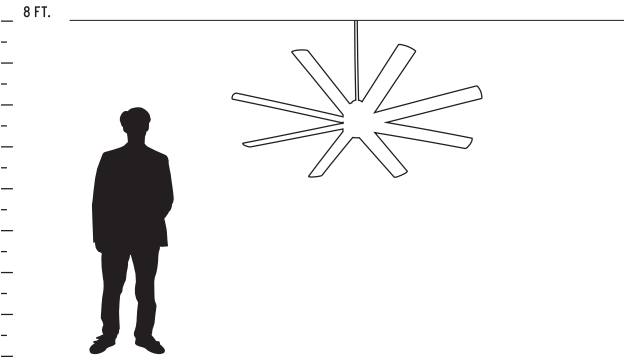3-100-15*
shown with optional light kit 3-9-100





| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|-----------------|--|--|---|--|---|
| 3-100-XX | 6 White* 15 Black* 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel* | White ABS Black ABS Silver Oiled Bronze Silver ABS |  3-9-100 18w, 3000k, 90CRI Dimmable LED, 1247 Delivered Lumens w/ Matte White Glass Diffuser |  Wall Control (included)  3-8-2000-0 Remote Control (optional) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty • Eight Blades • 70" Blade Sweep • 14-Degree Blade Pitch • 80" Lead Wire
- 4" and 6" Downrod (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 165mm DC Motor. • 6 Speeds-Reversible with wall control. • 8 Poles. • .40/.05 AMPS on H/L • 32/3 WATTS on H/L
- 119/49 RPMS on H/L. • Wall Control Included. • Remote Control Adaptable w/ 3-8-2000-0 Remote


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 9448 Cubic Feet/Minute. • Electricity Use: 35 Watts (Excludes Lights). • Airflow Efficiency: 270 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 6832 cfm. • Watts 22. • Airflow efficiency 306 cfm/w. • Estimated yearly energy cost \$6.


HEIGHT CHART



- FAN HEIGHT**
- Using 4" downrod
 - Distance of 13.5"
 - Distance of 10.25"

DYNAMO 54" CEILING FAN

damp

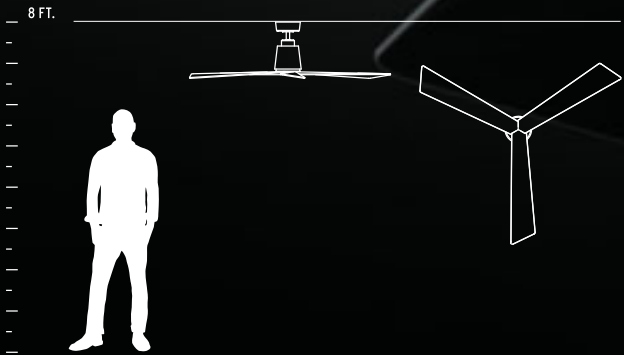

3-113-1540





3-113-640



3-113-24



3-113-15

| ITEM # | FINISH | BLADES | CONTROL | CERTIFICATION |
|----------|--|---|---|---|
| 3-113-XX | 15 Black 24 Satin Nickel 640 Aged Brass 1540 Aged Brass | Black ABS Silver ABS White ABS Black ABS |  Remote Control (included) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 54° Blade Sweep. • 20-Degree Blade Pitch. • 80° Lead Wire.
- 4" & 6" Downrod (Included). • Not Light Kit Adaptable • Additional Downrod Options on Page 248.

MECHANICAL SPECIFICATIONS:

- 125mm DC Motor. • 6 Speeds-Reversible with remote control. • .37/.04 AMPS on H/L • 28/3 WATTS on H/L
- 155/52 RPMS on H/L. • Remote Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 5850 Cubic Feet/Minute. • Electricity Use: 33 Watts (Excludes Lights). • Airflow Efficiency: 178 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 4012 cfm. • Watts 20. • Airflow efficiency 198 cfm/w. • Estimated yearly energy cost \$6.


HEIGHT CHART



- FAN HEIGHT**
Using 4" downrod
- Distance of 14"
 - Distance of 12"

FLEET 56" CEILING FAN

damp

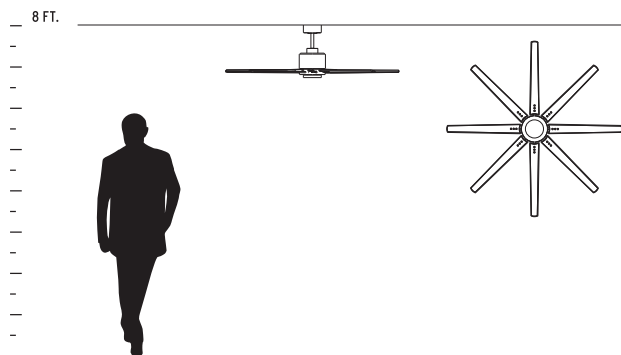



3-112-15

Optional LED Light Kit

3-9-108-40

7.5"(w) x 2.375"(h)
18w, 120v, 90CRI 3000k Dimmable LED Title 24
376 Delivered Lumens
Aged Brass | Matte White Glass Diffuser

Available Finishes

-  -40 Aged Brass | Matte White Glass Diffuser
-  -24 Satin Nickel | Matte White Glass Diffuser
-  -15 Black | Matte White Glass Diffuser
-  -6 White | Matte White Glass Diffuser






Optional LED Light Kit



3-1084-24

11"(w) x 6"(h)
18w, 120v, 90CRI 3000k Dimmable LED Title 24
556 Delivered Lumens
Satin Nickel | Matte White Glass

Available Finishes

-  -40 Aged Brass | Matte White Glass Diffuser
-  -24 Satin Nickel | Matte White Glass Diffuser
-  -15 Black | Matte White Glass Diffuser



| ITEM # | FINISH | BLADES | CONTROL | CERTIFICATION |
|----------|---|--|---|---|
| 3-112-XX | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | White ABS Weathered Gray ABS Silver ABS Matte Black ABS |  Remote Control (included) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Eight Blades. • 56° Blade Sweep. • 13-Degree Blade Pitch. • 80° Lead Wire.
- 4" & 6" Downrod (Included). • Additional Downrod Options on Page 248.

MECHANICAL SPECIFICATIONS:

- DC Motor. • 6 Speeds-Reversible with Remote Control. • .36/.04 AMPS on H/L • 28/3 WATTS on H/L
- 155/50 RPMS on H/L. • Remote Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 7662 Cubic Feet/Minute. • Electricity Use: 30 Watts (Excludes Lights). • Airflow Efficiency: 248 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 5161 cfm. • Watts 19. • Airflow efficiency 270 cfm/w. • Estimated yearly energy cost \$6.

HEIGHT CHART



FAN HEIGHT


- Using 4" downrod
- Distance of 13"
- Distance of 11"

FLEET 72" CEILING FAN

damp



3-108-15

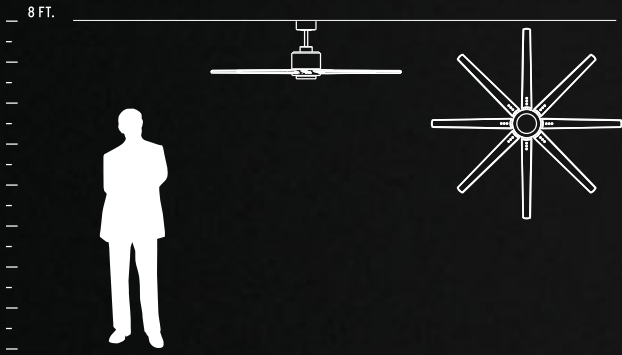



3-108-40



3-108-6

*provided with white blades, aged brass and white hardware (shown)



3-108-15

shown with optional light kit 3-1084-15



3-108-24

Optional LED Light Kit

3-9-108-24

7.5"(w) x 2.375"(h)
18w, 120v, 90CRI 3000k Dimmable LED Title 24
376 Delivered Lumens
Satin Nickel | Matte White Glass Diffuser

Available Finishes

-  -40 Aged Brass | Matte White Glass Diffuser
-  -24 Satin Nickel | Matte White Glass Diffuser
-  -15 Black | Matte White Glass Diffuser
-  -6 White | Matte White Glass Diffuser






Optional LED Light Kit



3-1084-15

11"(w) x 6"(h)
18w, 120v, 90CRI 3000k Dimmable LED Title 24
556 Delivered Lumens
Black | Matte White Glass

Available Finishes

-  -40 Aged Brass | Matte White Glass Diffuser
-  -24 Satin Nickel | Matte White Glass Diffuser
-  -15 Black | Matte White Glass Diffuser



| ITEM # | FINISH | BLADES | CONTROL | CERTIFICATION |
|----------|---|--|---|---|
| 3-108-XX | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | White ABS Weathered Gray ABS Silver ABS Matte Black ABS |  Remote Control (included) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Eight Blades. • 72° Blade Sweep. • 13-Degree Blade Pitch. • 80° Lead Wire. • 6" Downrod (Included).
- Additional Downrod Options on Page 248.

MECHANICAL SPECIFICATIONS:

- DC Motor. • 6 Speeds-Reversible with wall control. • .30/.06 AMPS on H/L • 28/4 WATTS on H/L • 100/50 RPMS on H/L.
- Remote Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 9280 Cubic Feet/Minute. • Electricity Use: 30 Watts (Excludes Lights). • Airflow Efficiency: 307 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 7087 cfm. • Watts 20. • Airflow efficiency 355 cfm/w. • Estimated yearly energy cost \$6.

HEIGHT CHART




FAN HEIGHT

- Using 6" downrod
- Distance of 14.97"
- Distance of 13.08"




JUNO 60" CEILING FAN

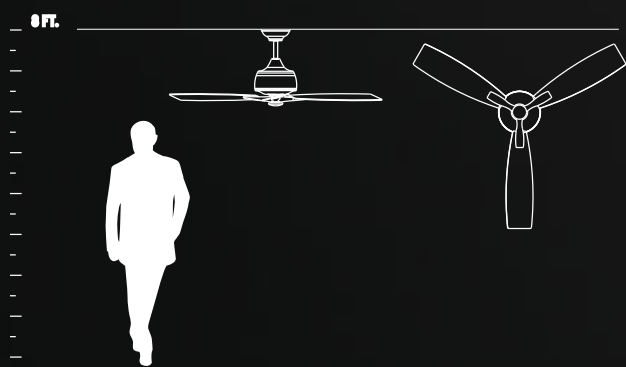

3-109-15





| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|-----------------|--|---|---|--|---|
| 3-109-XX | 6 White 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | White Black Weathered Gray Oiled Bronze Weathered Oak Silver Weathered Gray Matte Black Weathered Oak |  <p>3-9-109-XX 7.375"(w) x 3.875"(h) 18w, 3000k, 90CRI Dimmable LED, 233 Delivered Lumens w/ Matte White Glass Diffuser</p> |  Wall Control (included) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 60" Blade Sweep. • 16-Degree Blade Pitch. • 80" Lead Wire.
- 4" & 6" Downrod (Included).

MECHANICAL SPECIFICATIONS:

- 125mm DC Motor. • 6 Speeds-Reversible with wall control. • .39/.05 AMPS on H/L • 31/3 WATTS on H/L
- 119/49 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 5789 Cubic Feet/Minute. • Electricity Use: 36 Watts (Excludes Lights). • Airflow Efficiency: 161 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 4250 cfm. • Watts 23. • Airflow efficiency 186 cfm/w. • Estimated yearly energy cost \$6.

HEIGHT CHART



- FAN HEIGHT**
- Using 4" downrod
 - Distance of 15.75"
 - Distance of 13.75"


OSLO 52" CEILING FAN

damp



3-101-15

shown with optional light kit **3-9-101** and black ABS blades

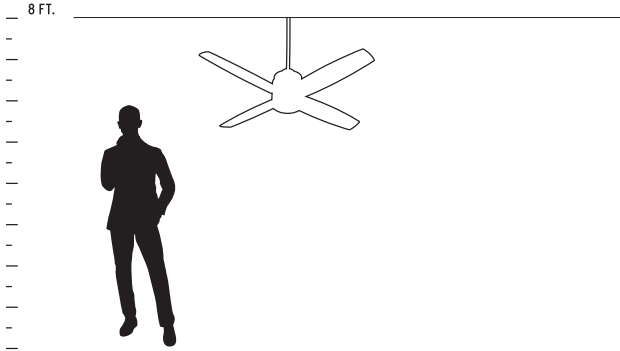



| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|-----------------|--|---|---|--|---|
| 3-101-XX | 6 White 15 Black 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | White ABS Black ABS Silver ABS Oiled Bronze ABS Silver ABS Black ABS |  3-9-101 18w, 3000k, 90CRI, Dimmable LED, 430 Delivered Lumens w/ Matte White Glass Diffuser Damp Listed |  Wall Control (included) Remote Control 3-8-1000-0* (optional) |  |

*3-8-1000-0 remote features 3 fan speeds, forward/reverse function, light kit on/off/dimmer and timer that will turn off the fan after 2, 4 or 8 hours.

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Four Blades. • 52" Blade Sweep. • 14-Degree Blade Pitch. • 80" Lead Wire.
- 4" & 6" Downrods (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 153x18 Motor. • 3 Speeds-Reversible with wall control. • 14 Poles. • .50/.27 AMPS on H/L • 64/16 WATTS on H/L
- 147/72 RPMS on H/L. • Wall Control Included. • Remote Control Adaptable w/ 3-8-1000-0 Remote.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 4990 Cubic Feet/Minute. • Electricity Use: 64 Watts (Excludes Lights). • Airflow Efficiency: 77 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 3770 cfm. • Watts 43. • Airflow efficiency 88 cfm/w. • Estimated yearly energy cost \$12.

HEIGHT CHART



- FAN HEIGHT**
- Using 4" downrod
 - Distance of 14.5"
 - Distance of 11.5"


OSLO HUGGER 52" CEILING FAN

damp







damp

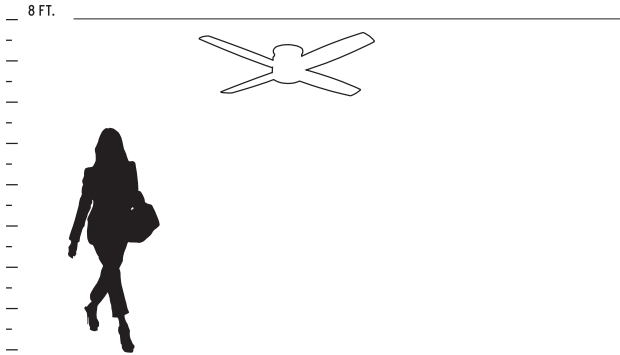3-102-40
shown with optional light kit **3-9-101**





| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|-----------------|--|---|--|---|---|
| 3-102-XX | 6 White 15 Black 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | White ABS Black ABS Silver ABS Oiled Bronze ABS Silver ABS Black ABS |  3-9-101 18w, 3000k, 90CRI, Dimmable LED, 430 Delivered Lumens w/ Matte White Glass Diffuser Damp Listed |  Wall Control (included)  Remote Control 3-8-1000-0* (optional) |  |

*3-8-1000-0 remote features 3 fan speeds, forward/reverse function, light kit on/off/dimmer and timer that will turn off the fan after 2, 4 or 8 hours.

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Four Blades. • 52" Blade Sweep. • 14-Degree Blade Pitch. • 22" Lead Wire.

MECHANICAL SPECIFICATIONS:

- 153x18 Motor. • 3 Speeds-Reversible with wall control. • 14 Poles. • .51/.27 AMPS on H/L • 62/17 WATTS on H/L
- 151/76 RPMs on H/L. • Wall Control Included. • Remote Control Adaptable w/ 3-8-1000-0 Remote.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 3664 Cubic Feet/Minute. • Electricity Use: 64 Watts (Excludes Lights). • Airflow Efficiency: 57 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 2764 cfm. • Watts 43. • Airflow efficiency 65 cfm/w. • Estimated yearly energy cost \$12.

HEIGHT CHART




- FAN HEIGHT**
- Distance of 10.25"
 - Distance of 7"

PROPEL 56" CEILING FAN



3-106-22

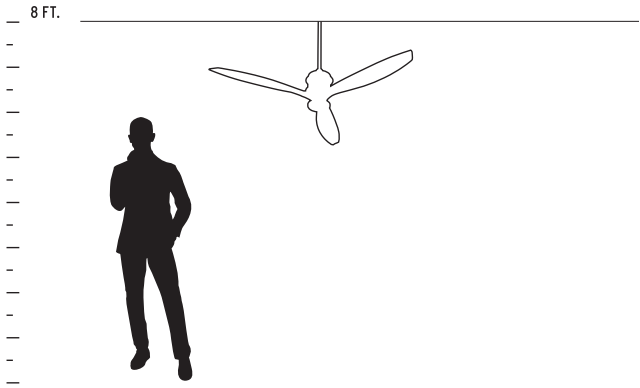







3-106-6



3-106-24

| ITEM # | FINISH | BLADES | LED LIGHT KIT (included) | | CONTROLS | CERTIFICATION |
|----------|---|---|---|--|---|---|
| 3-106-XX | 6 White 22 Oiled Bronze 24 Satin Nickel | White ABS Oiled Bronze ABS Silver ABS |  | 15w, 3000k, 90CRI, Dimmable LED w/White Glass Diffuser |  Wall Control (included)  3-8-3000 Remote Control (optional) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 56" Blade Sweep. • 16-Degree Blade Pitch. • 80" Lead Wire.
- 4.5" Downrod (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 120mm DC Motor. • 6 Speeds-Reversible with wall control. • 8 Poles. • .42/.05 AMPS on H/L • 25/3 WATTS on H/L.
- 200/74 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 5115 Cubic Feet/Minute. • Electricity Use: 25 Watts (Excludes Lights). • Airflow Efficiency: 204 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 3710 cfm. • Watts 18. • Airflow efficiency 211 cfm/w. • Estimated yearly energy cost \$5.

HEIGHT CHART




FAN HEIGHT



- Using 4.5" downrod
- Distance of 15.25"
- Distance of 11.5"

RONDURE 54" CEILING FAN

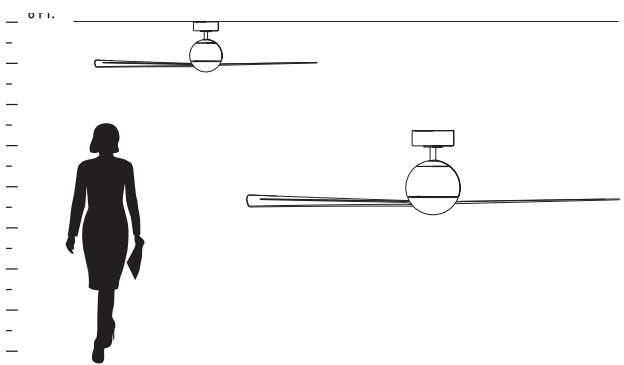damp





| ITEM # | FINISH | BLADES | CONTROLS | CERTIFICATION |
|----------|--|---|---|---|
| 3-114-XX | 6 White 15 Black 24 Satin Nickel | White ABS Weathered Gray ABS Silver ABS |  Wall Control (included) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty • Three Blades • 54" Blade Sweep • 16-Degree Blade Pitch • 80" Lead Wire • Not Light Kit Adaptable
- 4" & 6" downrods included • Not Light Kit Adaptable • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 125mm DC Motor • 6 Speeds-Reversible with wall control • 8 Poles • .34/.03 AMPS on H/L • 26/2 WATTS on H/L
- 165/52 RPMS on H/L • Wall Control Included • Not Remote Control Adaptable


ENERGY SPECIFICATIONS:

- Energy Information at High Speed • Airflow: 6665 Cubic Feet/Minute • Electricity Use: 32 Watts (Excluded Lights) • Airflow Efficiency: 208 Cubic Feet/Minute/Watt

DOE ENERGY GUIDE INFORMATION

- Airflow: 4418 cfm • Watts 20 • Airflow Efficiency 225 cfm/w • Estimated yearly energy cost \$6

HEIGHT CHART




FAN HEIGHT

- Using 4" downrod
- Distance of 10.325"
- Distance of 12.375"

SOL 52" CEILING FAN



3-104-15

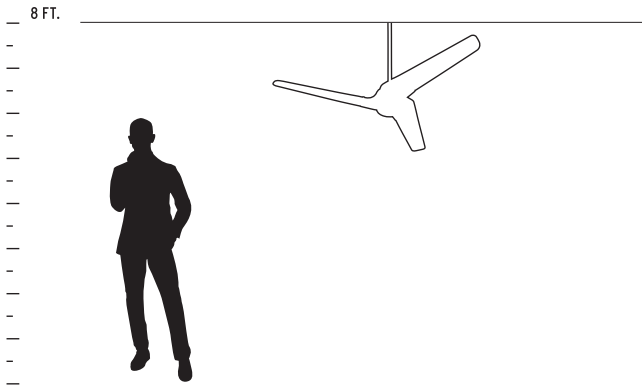



3-104-6






3-104-22



3-104-20
shown with optional light kit 3-9-102



3-104-24

| ITEM # | FINISH | BLADES | LED LIGHT KIT (optional) | CONTROLS | CERTIFICATION |
|----------|---|--|--|--|---|
| 3-104-XX | 6 White 15 Black 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel | White ABS Black ABS Silver ABS Oiled Bronze ABS Silver ABS |  <p>3-9-102 15w, 3000k, 90CRI, Dimmable LED, 743 Delivered Lumens w/ Matte White Polycarbonate Diffuser</p> |  <p>Wall Control (included) 3-8-3000 Remote Control (optional)</p> |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 52" Blade Sweep. • 15-Degree Blade Pitch. • 80" Lead Wire.
- 4.5" Downrod (Included) • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 120mm DC Motor. • 6 Speeds-Reversible with wall control. • 8 Poles. • .39/.07 AMPS on H/L • 23/3 WATTS on H/L.
- 168/69 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 4644 Cubic Feet/Minute. • Electricity Use: 23 Watts (Excludes Lights). • Airflow Efficiency: 202 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 3272 cfm. • Watts 16. • Airflow efficiency 203 cfm/w. • Estimated yearly energy cost \$5.

HEIGHT CHART




- FAN HEIGHT**
Using 4.5" downrod
- Distance of 11.5"
 - Distance of 8"

SOLIS 56" CEILING FAN

wet



3-107-15

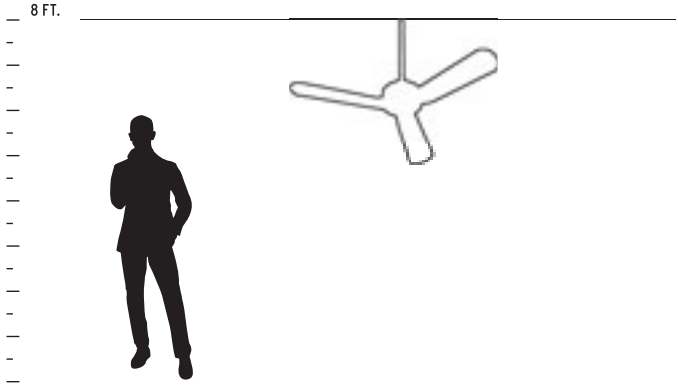







3-107-24



3-107-6

| ITEM # | FINISH | BLADES | CONTROLS | CERTIFICATION |
|----------|--|--------------------------------------|---|---|
| 3-107-XX | 6 White 15 Black 24 Satin Nickel | White ABS Black ABS Silver ABS |  Wall Control (included)  3-8-4000 Remote Control (optional) |   |

*3-8-4000 remote features 3 fan speeds and timer that will turn off the fan after 2, 4 or 8 hours.

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty. • Three Blades. • 56" Blade Sweep. • 16-Degree Blade Pitch. • 80" Lead Wire.
- 4" & 6" Downrods (Included) • Not Light Kit Adaptable. • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 188x18 Motor. • 4 Speeds-Reversible with manual reverse switch. • 16 Poles. • .43/17 AMPS on H/L • 52/8 WATTS on H/L.
- 157/58 RPMS on H/L. • Wall Control Included.


ENERGY SPECIFICATIONS:

- Energy Information at High Speed. • Airflow: 6192 Cubic Feet/Minute. • Electricity Use: 51 Watts (Excludes Lights). • Airflow Efficiency: 121 Cubic Feet/Minute/Watt.

DOE ENERGY GUIDE INFORMATION

- Airflow 4340 cfm. • Watts 31. • Airflow efficiency 138 cfm/w. • Estimated yearly energy cost \$9.

HEIGHT CHART



FAN HEIGHT

- Using 4.5" downrod
- Distance of 11.5"
- Distance of 11"


TEMPLE 56" CEILING FAN

damp





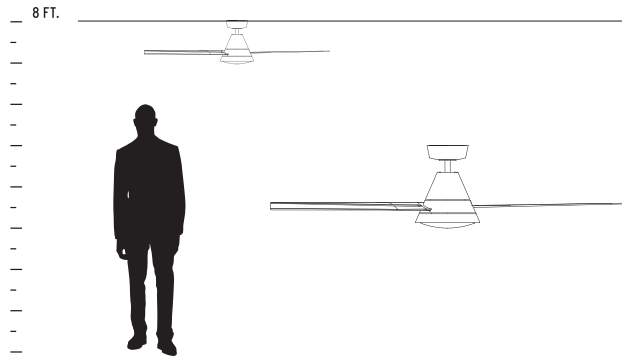


3-115-15



3-115-640



3-115-24

| ITEM # | FINISH | BLADES | LED LIGHT KIT (included) | CONTROLS | CERTIFICATION |
|----------|---|---|---|---|---|
| 3-115-XX | 15 Black 24 Satin Nickel 640 White/Aged Brass | Weathered Gray ABS Weathered Gray ABS White ABS |  3-9-110-XX 24w, 3000k, 90CRI, Dimmable LED, 1026 Delivered Lumens w/ Matte White Glass Diffuser Wet Listed |  Wall Control (included) |  |

GENERAL SPECIFICATIONS:

- Lifetime Motor Warranty • Three Blades • 56" Blade Sweep • 13-Degree Blade Pitch • 80" Lead Wire
- 24w LED Kit Included • Additional Downrod options on page 248.

MECHANICAL SPECIFICATIONS:

- 125mm DC Motor • 6 Speeds-Reversible with wall control • 8 Poles • .37/.04 AMPS on H/L • 26/2 WATTS on H/L
- 150/50 RPMS on H/L • Wall Control Included • Not Remote Control Adaptable


ENERGY SPECIFICATIONS:

- Energy Information at High Speed • Airflow: 6339 Cubic Feet/Minute • Electricity Use: 31 Watts (Excluded Lights) • Airflow Efficiency: 204 Cubic Feet/Minute/Watt

DOE ENERGY GUIDE INFORMATION

- Airflow: 4340 cfm • Watts 19 • Airflow Efficiency 224 cfm/w • Estimated yearly energy cost \$5

HEIGHT CHART



- FAN HEIGHT**
Using 4.5" downrod
- Distance of 9.5"
 - Distance of 13"





chandelières




ACADIA CHANDELIER

LED



3-6143-24

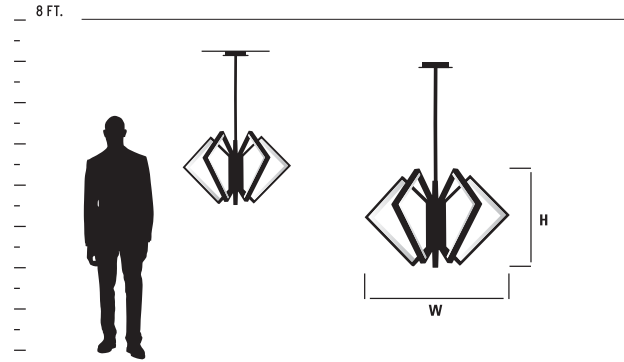

3-6142-40


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------------------|---------------------|----------------------------------|---------------------|---|--------------------|---------------|
| 3-6142-XX 25" small | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 25"(w) x 15.25"(h)* | 5 x 12.8w, 90CRI 3000k LED 2500 Delivered Lumens | 120V Triac dimming | |
| 3-6143-XX 30" large | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 30"(w) x 18.25"(h)* | 5 x 15.5w, 90CRI 3000k LED 3295 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Matte white acrylic diffuser is 1/16" thick. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 75.6w for 3-6142-XX and 90.9w for 3-6143-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ATLANTIS CHANDELIER

LED

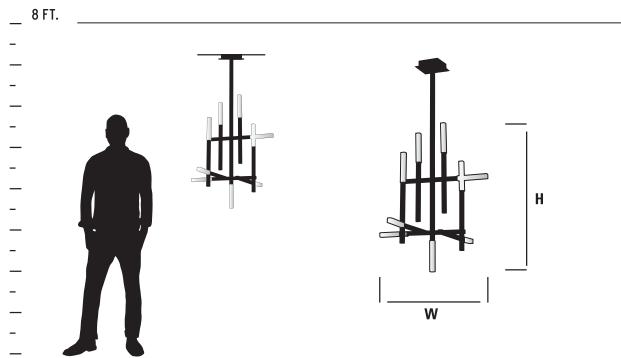


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|----------------------|----------------------------------|---------------------------|---|--------------------|---------------|
| 3-636-XX small | Clear Bubble Acrylic | 24 Satin Nickel 40 Aged Brass | 27"(w) x 36.5"(h)* | 9 x 2.1w, 90CRI 3000k LED 947 Delivered Lumens | 120V Triac dimming | |
| 3-637-XX large | Clear Bubble Acrylic | 24 Satin Nickel 40 Aged Brass | 42"(l) x 18"(w) x 23"(h)* | 13 x 2.1w, 90CRI 3000k LED 1332 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Clear bubble acrylic diffusers. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 25w for 3-636-XX and 33.6w for 3-637-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

BONZO CHANDELIER

LED

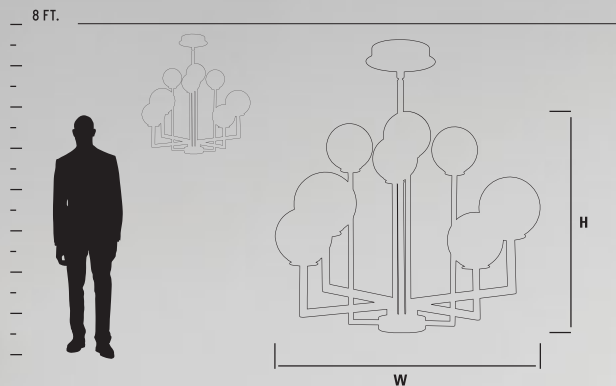

3-28-1540


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|------------------|-----------------------|-----------------------|---------------------------|--------------------|---------------|
| 3-28-1540 | Satin Opal Glass | 1540 Black/Aged Brass | 31.5"(w) x 21.75"(h)* | 8 x 3.9w, 90CRI 3000k LED | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel housing and canopy. • Satin Opal glass diffusers. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 45-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

LUSTRE CHANDELIER

LED

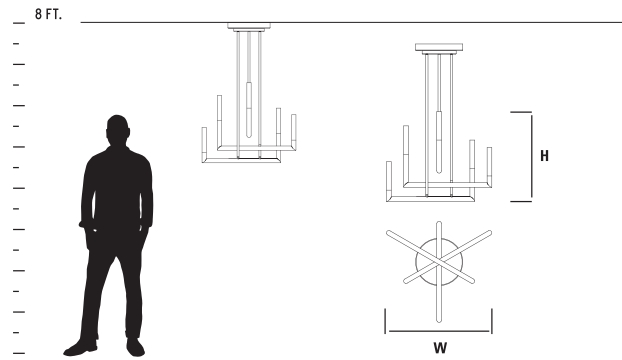


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------------|--------------------|---------------------------|---------------------|---------------------------|--------------------|---------------|
| 3-24-XX | Clear Bubble Glass | 15 Black 40 Aged Brass | 25.25"(w) x 33"(h)* | 6 x 5.3w, 90CRI 3000k LED | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel housing and canopy.
- Clear bubble glass diffusers.
- *Height measured with flush mount hardware.
- Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height.
- Canopy swivel allows for mounting on sloped ceilings - up to 45-degrees.
- Unit mounts to 4" octagonal junction box.
- Driver mounts inside ceiling canopy.
- Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information.
- Oxygen reserves the right to modify designs at any time.

MIRO CHANDELIER

LED

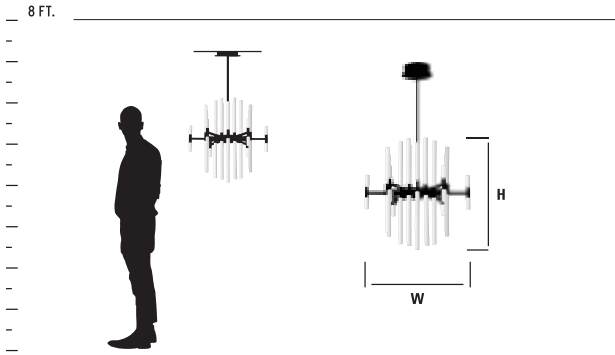

3-605-24



3-605-40


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|----------------------|----------------------------------|--------------------|---|--------------------|---------------|
| 3-605-XX | Clear Bubble Acrylic | 24 Satin Nickel 40 Aged Brass | 26"(w) x 28.5"(h)* | 37 x 2.1w, 90CRI 3000k LED 2428 Delivered Lumens | 120V Triac dimming | ETL damp |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Clear bubble acrylic diffusers. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 94w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

MOXY CHANDELIER

LED

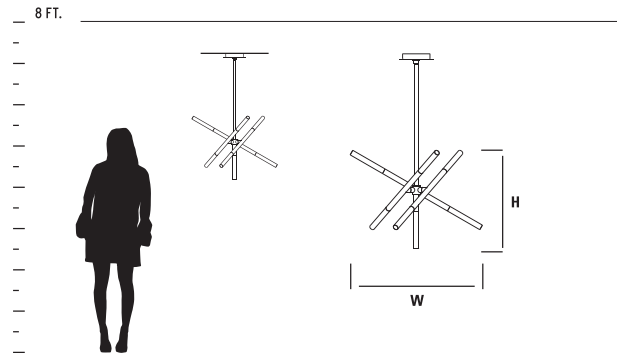

3-696-24



3-697-40


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------|----------------------|----------------------------------|---------------------|--|--------------------|---------------|
| 3-696-XX small | Clear Bubble Acrylic | 24 Satin Nickel 40 Aged Brass | 28"(w) x 22.75"(h)* | 7 x 2.1w, 90CRI 3000k LED 467 Delivered Lumens | 120V Triac dimming | |
| 3-697-XX large | Clear Bubble Acrylic | 24 Satin Nickel 40 Aged Brass | 32"(w) x 27"(h)* | 13 x 2.1w, 90CRI 3000k LED 893 Delivered Lumens | 120V Triac dimming | |


GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Clear bubble acrylic diffusers. • Arms can swivel and rotate positions. • *Height measured not including stem or ceiling canopy.
- Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 19.2w for 3-696-XX and 33.4w for 3-697-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

NERO CHANDELIER

LED

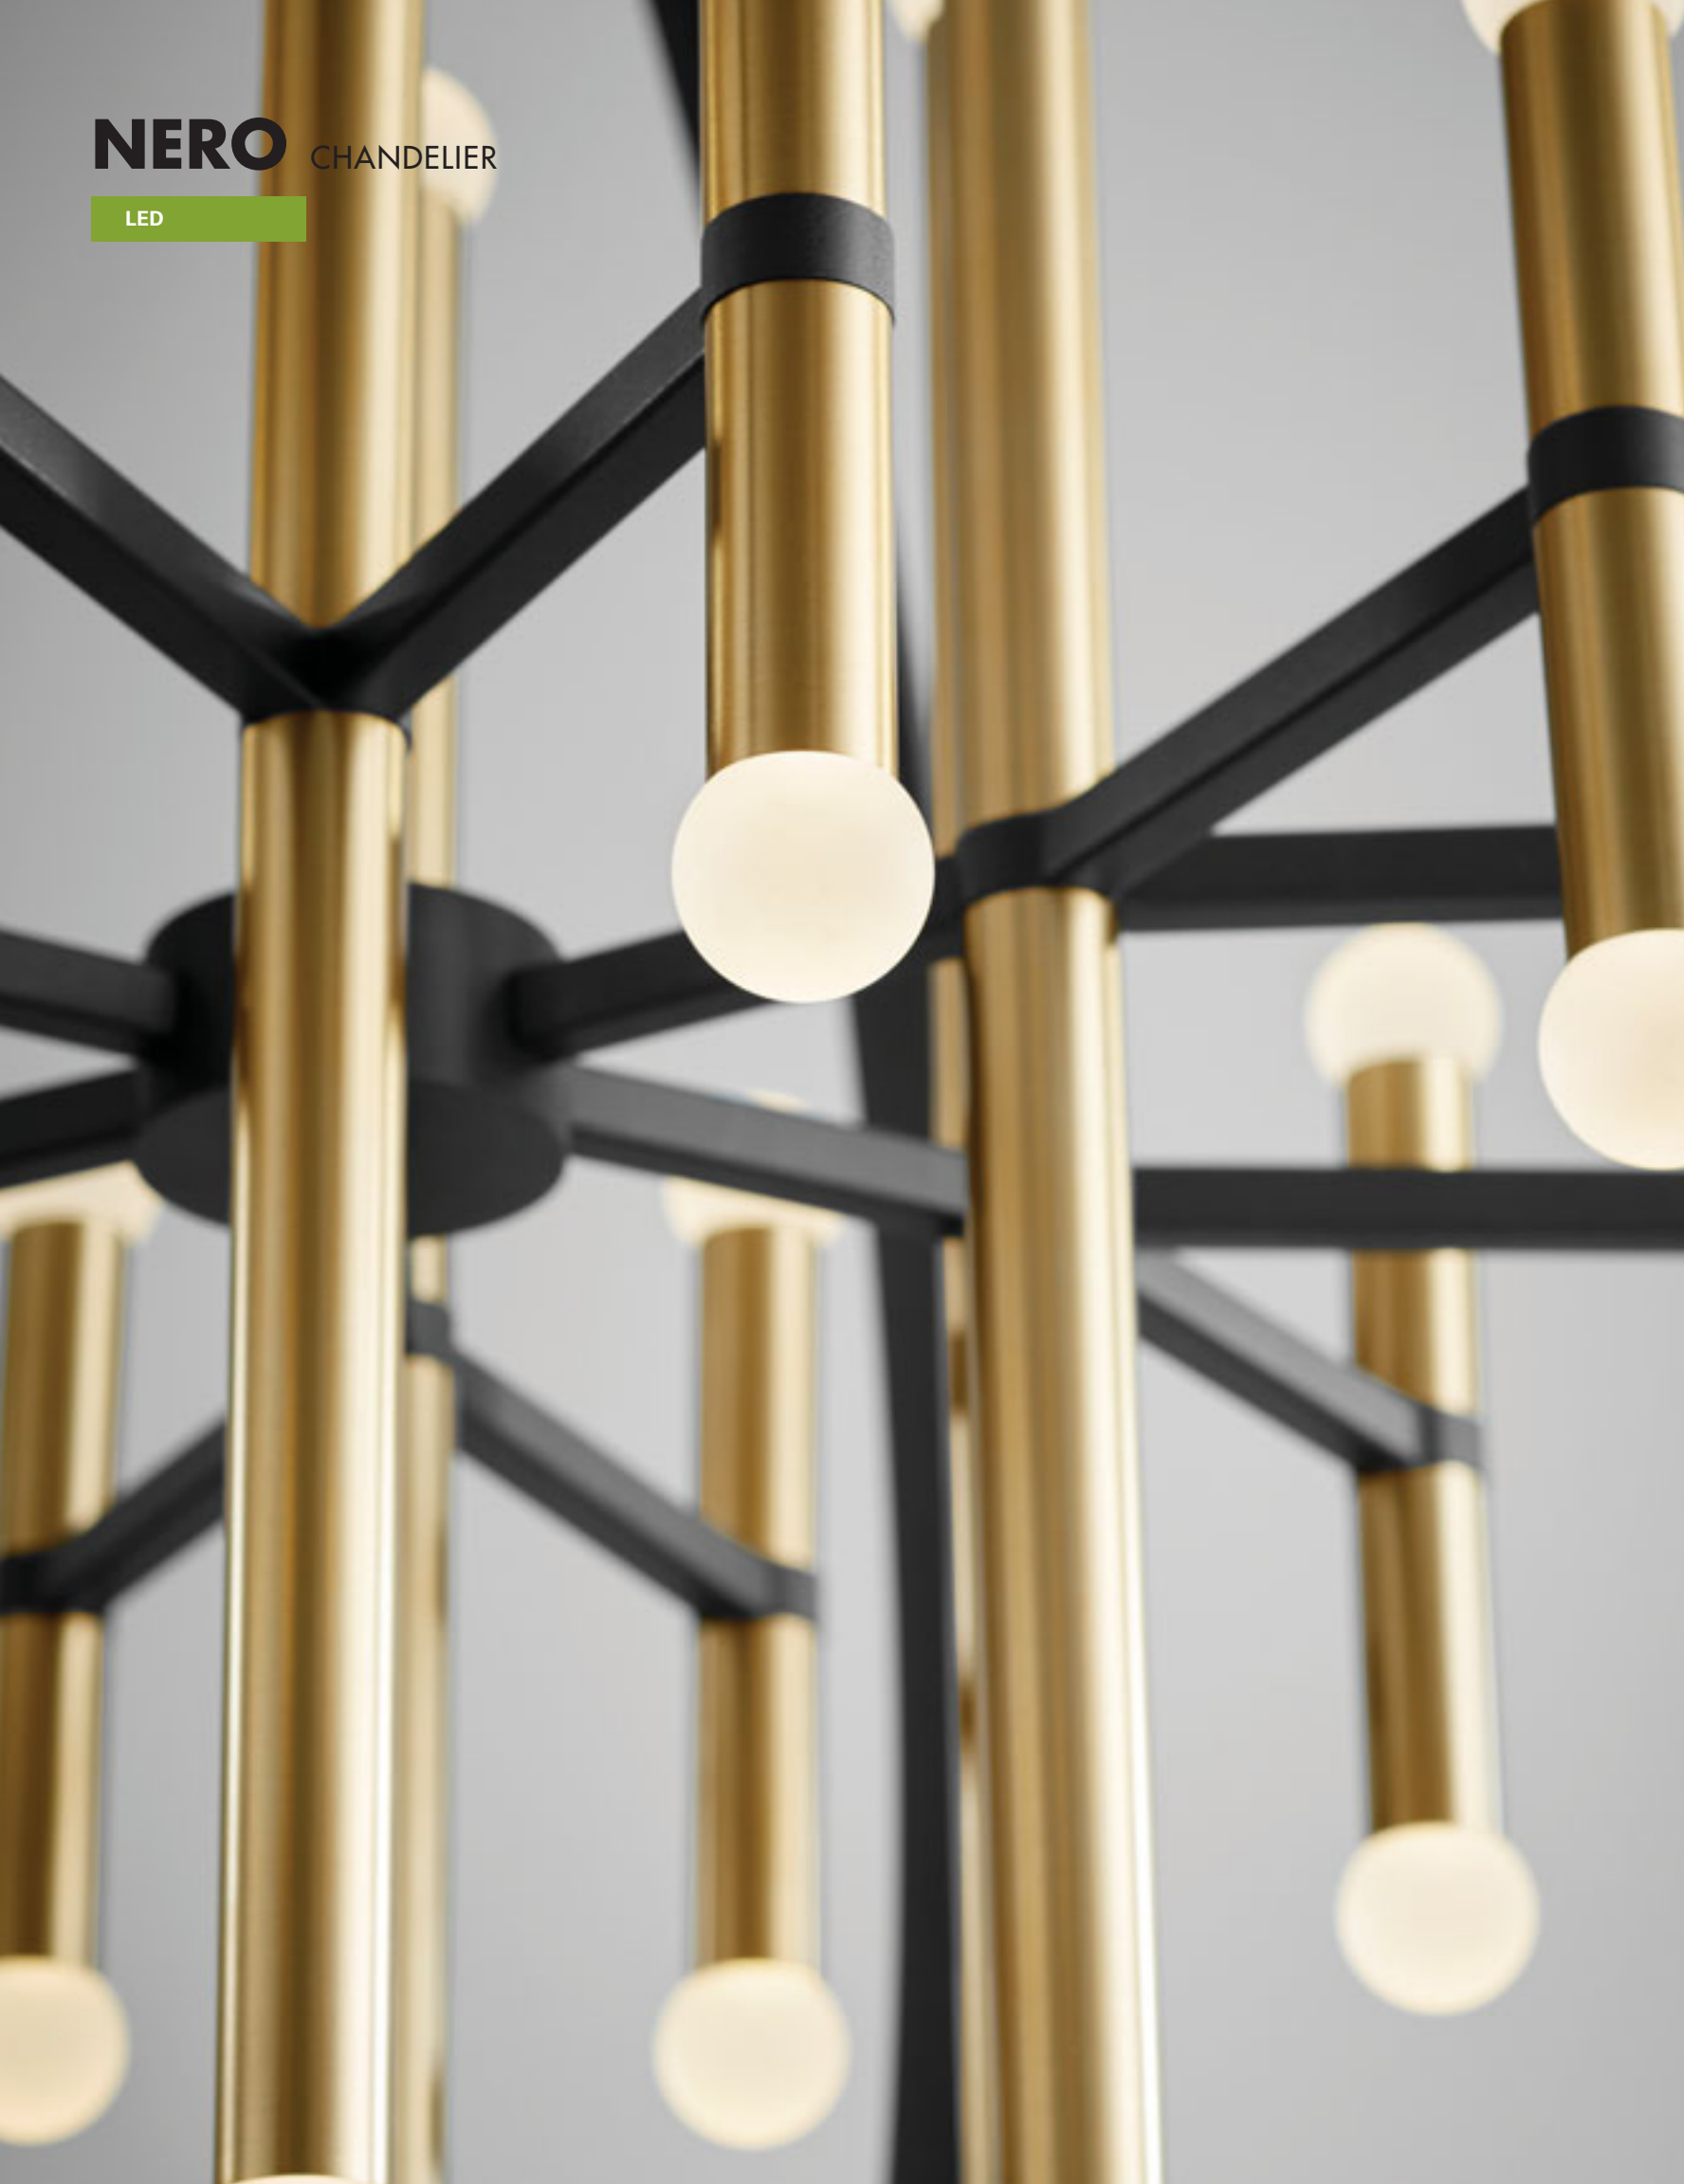

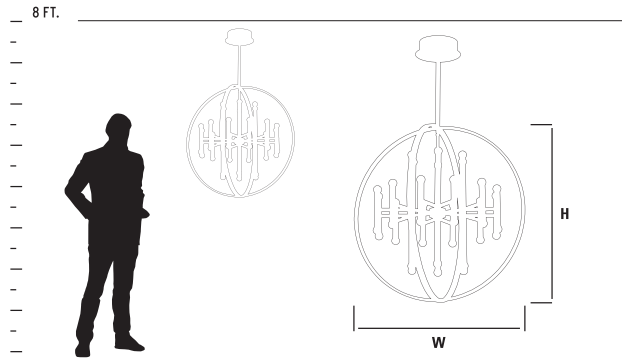


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------------------------|-----------------|-----------------------|--------------------|---|--------------------|---------------|
| 3-684-1540 small | Frosted Acrylic | 1540 Black/Aged Brass | 24"(w) x 26.5"(h)* | 24 x 2.1w, 90CRI 3000k LED | 120V Triac dimming | |
| 3-685-1540 large | Frosted Acrylic | 1540 Black/Aged Brass | 30"(w) x 33.5"(h)* | 36 x 2.1w, 90CRI 3000k LED 2565 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel housing and canopy. • Frosted acrylic diffusers. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 87.3w for 3-685-1540 • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information 3-684-1540. • Oxygen reserves the right to modify designs at any time.

PRESTO! CHANDELIER

LED

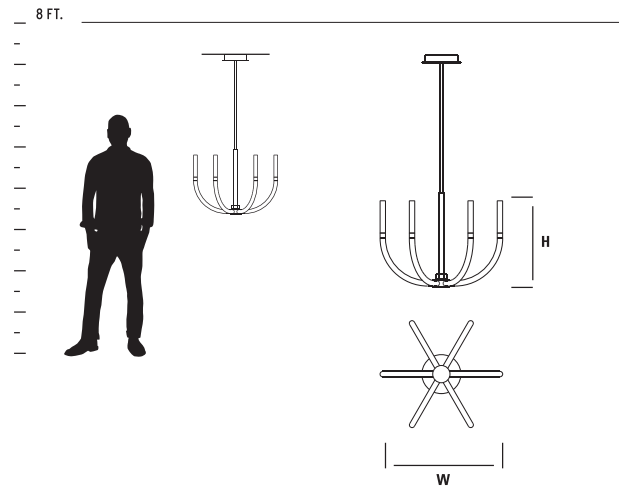

3-657-15



3-657-40


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|--------------------|--|-----------------------|---|--------------------|---------------|
| 3-657-XX | Clear Bubble Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 22.25"(w) x 19.5"(h)* | 6 x 5w, 90CRI 3000k LED 623 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:


• Cold rolled steel housing and canopy. • Clear bubble glass diffusers. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 45-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 32w • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

TALI CHANDELIER


LED

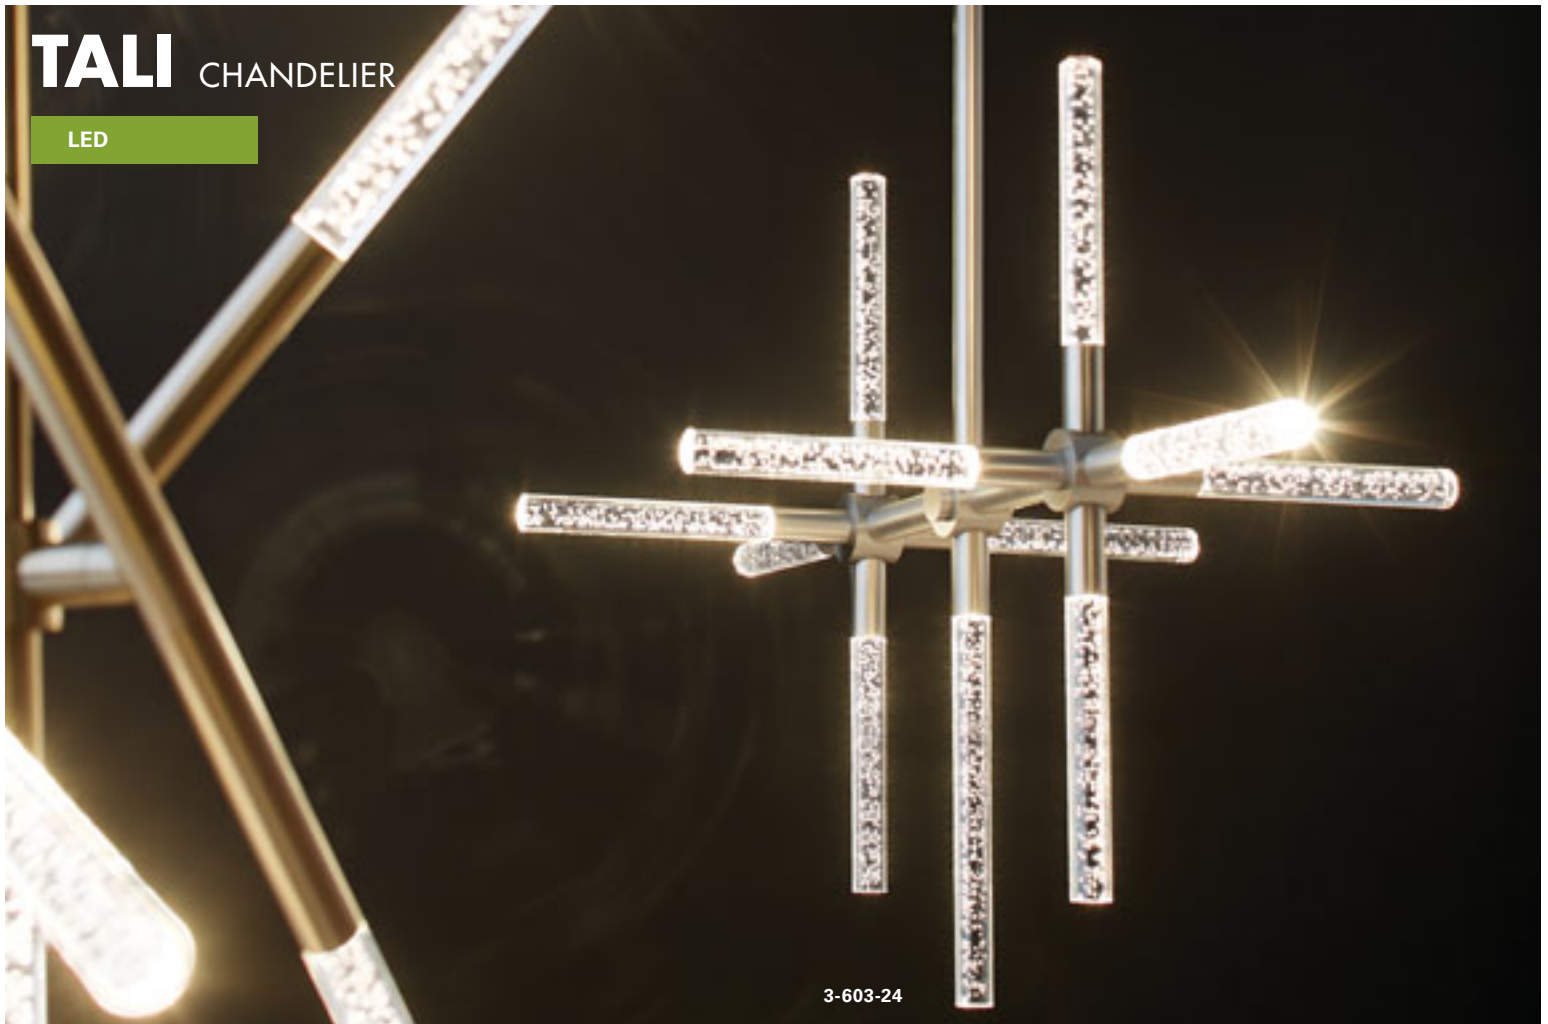

3-603-24

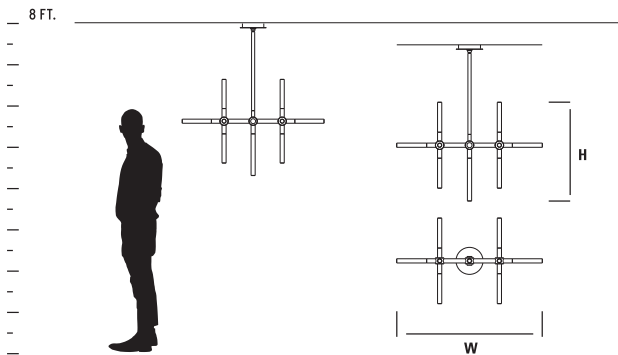

3-603-40

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|----------------------|----------------------------------|---------------------------------------|--|--------------------|---|
| 3-603-XX | Clear Bubble Acrylic | 24 Satin Nickel 40 Aged Brass | 33.125"(l) x 24.375"(w) x 24.375"(h)* | 11 x 2.1w, 90CRI 3000k LED 834 Delivered Lumens | 120V Triac dimming |  |

GENERAL SPECIFICATIONS:


- Cold rolled steel canopy. • Clear bubble acrylic diffusers. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 29.5w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

UTOPIA CHANDELIER

LED



3-6140-15

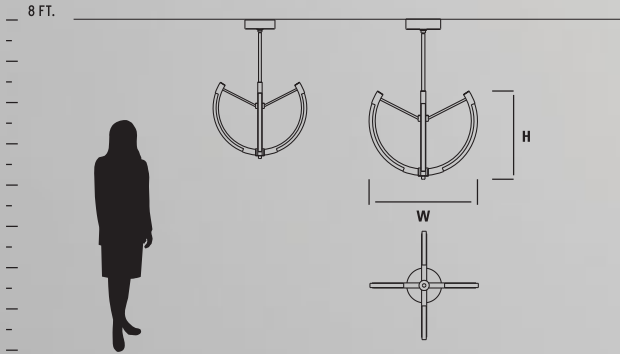



3-6141-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------------------|---------------------|-----------------------------|----------------------|---|--------------------|---------------|
| 3-6140-XX 21" small | Matte White Acrylic | 15 Black 24 Satin Nickel | 21"(w) x 20.25"(h)* | 4 x 10w, 90CRI 3000k LED 1508 delivered lumens | 120V Triac dimming | |
| 3-6141-XX 28" large | Matte White Acrylic | 15 Black 24 Satin Nickel | 28"(w) x 25.625"(h)* | 4 x 13.5w, 90CRI 3000k LED 2401 delivered lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Matte white acrylic diffuser is 1/16" thick. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 49.1w for 3-6140-XX and 63.1w for 3-6141-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.




A large, abstract graphic on the left side of the page, composed of several overlapping, curved brushstrokes in various shades of pink and magenta. The strokes are thick and textured, with visible brush marks and varying opacities, creating a sense of movement and depth. The top stroke is a lighter pink, while the bottom stroke is a darker magenta. The overall shape is roughly triangular, pointing towards the top right.

pendants

CIRCULO PENDANT

LED

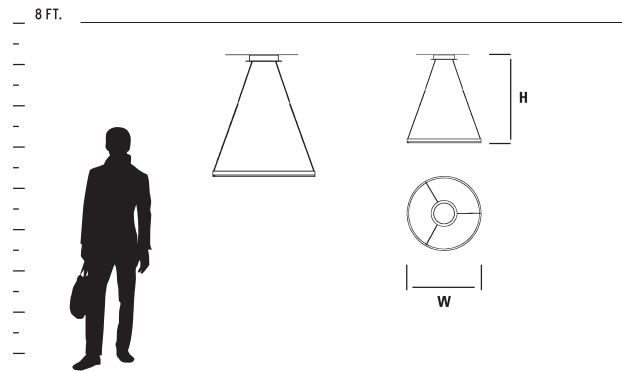

3-64-15



3-65-24



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------------------|---------------------|---|----------------------|---|--------------------|---------------|
| 3-64-XX 24" small | Matte White Acrylic | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 23.5"(w) x 1.25"(h)* | 1 x 53w, 90CRI 3000k LED 2653 delivered lumens | 120V Triac dimming | |
| 3-65-XX 32" large | Matte White Acrylic | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 31.5"(w) x 1.25"(h)* | 1 x 78w, 90CRI 3000k LED 4408 delivered lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Matte white acrylic diffuser is 1/16" thick. • *Height measured not including cables or ceiling canopy. • Fixture supplied with 8' of cable to customize hanging height. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 51.1w for 3-64-XX and 72.6w for 3-65-XX.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


CIRRO PENDANT

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------------------|----------------------|---|---------------------|---|--------------------|---|
| 3-60-XX 22" small | Matte White Silicone | 6 White 15 Black 30 Silver Graphite | 21"(w) x 20.25"(h)* | 1 x 44w, 90CRI 3000k LED 2936 delivered lumens | 120V Triac dimming |  |
| 3-61-XX 28" large | Matte White Silicone | 6 White 15 Black 30 Silver Graphite | 28"(w) x 25.5"(h)* | 1 x 95w, 90CRI 3000k LED 5674 Delivered Lumens | 120V Triac dimming |  |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Matte white silicone diffuser. • *Height measured not including cables or ceiling canopy. • Fixture supplied with 8' of cable to customize hanging height.
- Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 39w for 3-60XXX and 90w for 3-61-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

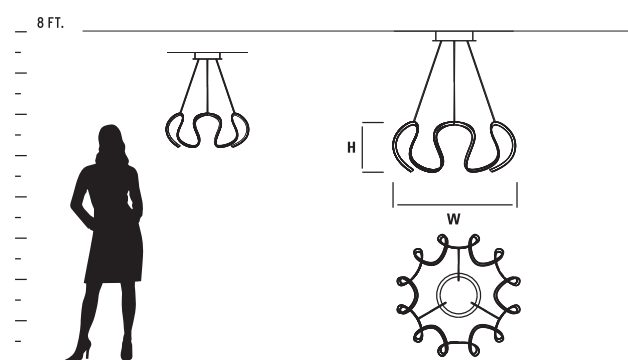


3-60-30



3-61-6

CORNET PENDANT

LED

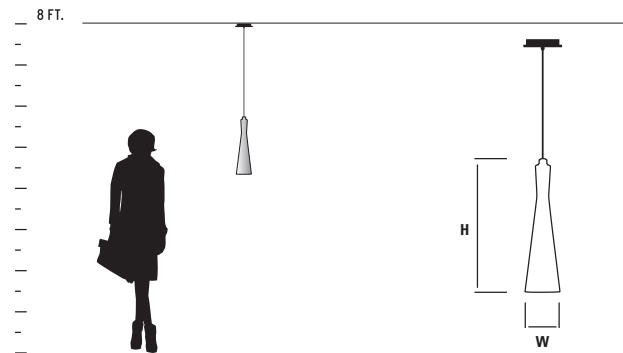


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------|-----------------------|--------------------|-----------------------|---|---------------------------------|---------------|
| 3-651-14 | Clear Glass | 14 Polished Chrome | 4.25"(w) x 17.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 399 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-651-1314 | 13 Smoked Ombre Glass | 14 Polished Chrome | 4.25"(w) x 17.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 399 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-651-2018 | 20 Coffee Ombre Glass | 18 Gunmetal | 4.25"(w) x 17.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 399 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Blown glass is 1/16" thick. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord. • Unit mounts to deep 4" octagonal junction box. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

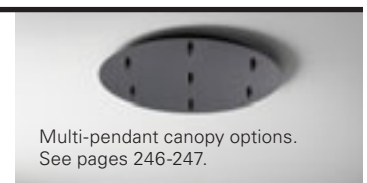

DECCA PENDANT

LED

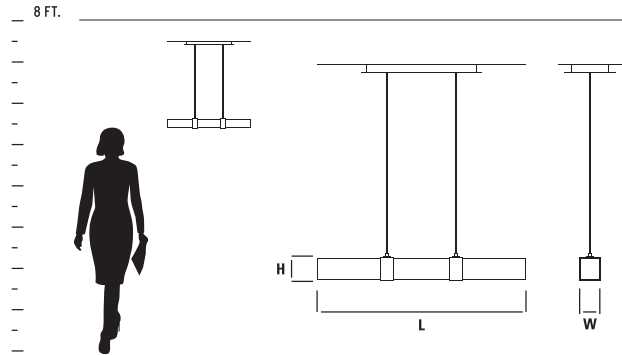


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------------|--|-----------------------------------|--|--------------------|---------------|
| 3-24-XXXX 24" pendant | Matte White Acrylic | 1540 Aged Brass/Black Oak 2440 Aged Brass/Walnut 5224 Satin Nickel/White Oak | 24"(l) x 2.125"(w) x 2.75"(h)* | 1 x 15.5w, 90CRI 3000k LED 345 Delivered Lumens | 120V Triac dimming | |
| 3-36-XXXX 36" pendant | Matte White Acrylic | 1540 Aged Brass/Black Oak 2440 Aged Brass/Walnut 5224 Satin Nickel/White Oak | 35.75"(l) x 2.125"(w) x 2.75"(h)* | 1 x 23.6w, 90CRI 3000k LED 506 Delivered Lumens | 120V Triac dimming | |
| 3-48-XXXX 48" pendant | Matte White Acrylic | 1540 Aged Brass/Black Oak 2440 Aged Brass/Walnut 5224 Satin Nickel/White Oak | 47.5"(l) x 2.125"(w) x 2.75"(h)* | 1 x 31.7w, 90CRI 3000k LED 733 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Matte white acrylic diffuser is 1/16" thick. • Wood housing construction. • *Height measured not including cables or ceiling canopy. • Fixture supplied with 10' adjustable cable to customize hanging height. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 20.8w for 3-24-XXXX, 28.6w for 3-36-XXXX and 38.1w for 3-48-XXXX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

DIETER PENDANT

LED

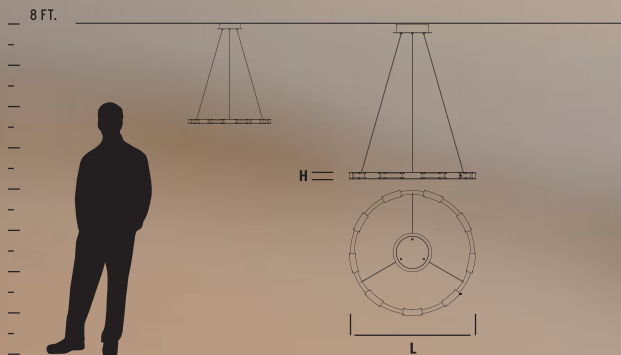



3-22-15



3-23-6

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------------------|---------------------|---------------------|-----------------------|---------------------------|--------------------|---------------|
| 3-22-XX 24" pendant | Matte White Acrylic | 6 White 15 Black | 24.25"(w) x 1.75"(h)* | 6 x 8.5w, 90CRI 3000k LED | 120V Triac dimming | |
| 3-23-XX 32" pendant | Matte White Acrylic | 6 White 15 Black | 32"(w) x 1.75"(h)* | 9 x 8.5w, 90CRI 3000k LED | 120V Triac dimming | |


GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Matte white silicone diffuser is 1/16" thick. • *Height measured not including cables or ceiling canopy. • Fixture supplied with 10' adjustable cable to customize hanging height. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

DUNE PENDANT



3-641-1540

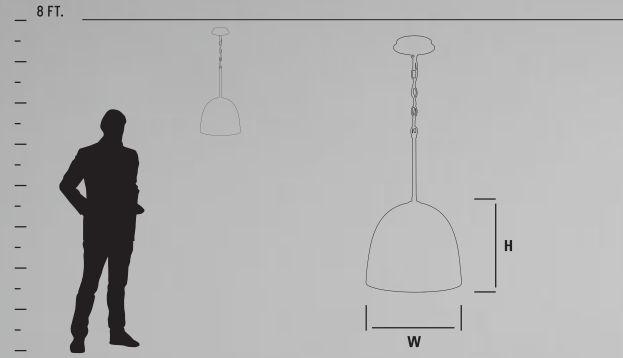

3-641-1624


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|------------|----------|---|-----------------|--|---------------|
| 3-641-XXXX | Concrete | 1540 Aged Brass/Dark Gray 1624 Satin Nickel/Gray | 16"(w) x 12"(h) | 1 x 24w Medium PAR20/30/38/A21/A19 (not included) | ETL damp |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Concrete shade. • *Height measured not including stems, chain or ceiling canopy. • Fixture supplied with 2-8", 2-12", 2-16" and 1' of chain to customize hanging height. • Unit mounts to 4" octagonal junction box capable of supporting 50lbs. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ECHO PENDANT

LED

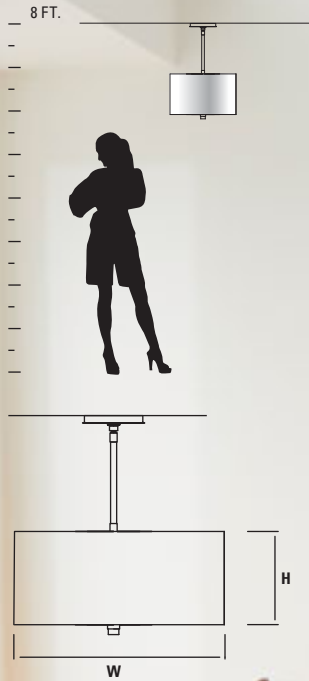

3-640-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|--------------------------------|-----------------|----------------------|---|---------------------------------|---------------|
| 3-639-24 medium | White Grass Shade with Acrylic | 24 Satin Nickel | 24"(w) x 10.625"(h)* | 3 x 10.1w, 90CRI 3000k LED 2040 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-640-24 large | White Grass Shade with Acrylic | 24 Satin Nickel | 30"(w) x 10.625"(h)* | 4 x 10.1w, 90CRI 3000k LED 2775 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled Steel Canopy. • Grass shades are natural bamboo fibers. • Acrylic diffuser. • Cast steel with acrylic finial. • *Height measured not including stem or ceiling canopy.
- Stem is custom cut at oxygen facility to customer's specification (maximum stem length 60"). • Canopy swivel allows for mounting on sloped ceilings – up to 20-degrees.
- Unit mounts to 4" octagonal junction box. • Total luminaire power 38.9w for 3-639-24, and 52.6w for 3-640-24. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

ELLIPSE PENDANT

LED

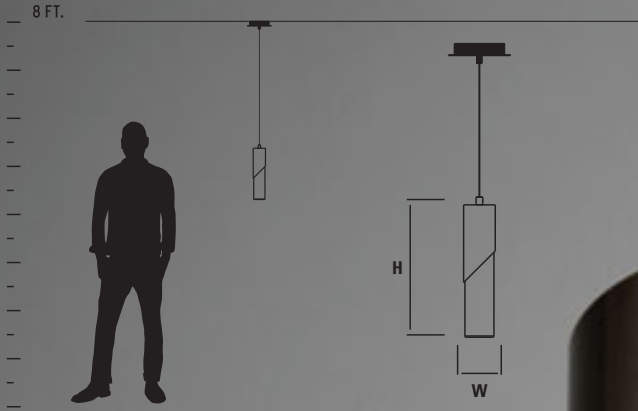

3-677-124



3-678-224



3-668-120



3-677-215




3-667-220

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|------------------------------|---|-----------------------|---|---------------------------------|------------------------|
| 3-667-1XX | 1 White Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 3"(w) x 9.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 147 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-667-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 3"(w) x 9.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 158 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-668-1XX | 1 White Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 3"(w) x 13.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 176 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-668-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 3"(w) x 13.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 177 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-677-1XX | 1 White Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 3.75"(w) x 10.75"(h)* | 1 x 6.2w, 90CRI 3000k LED 224 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-677-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 3.75"(w) x 10.75"(h)* | 1 x 6.2w, 90CRI 3000k LED 216 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-678-1XX | 1 White Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 3.75"(w) x 16.75"(h)* | 1 x 6.2w, 90CRI 3000k LED 244 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |
| 3-678-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 3.75"(w) x 16.75"(h)* | 1 x 6.2w, 90CRI 3000k LED 213 Delivered Lumens | 120/277V 0-10V/Phase dimming | cUL _{us} damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel canopy. • Blown glass and acrylic diffusers are 1/8" thick. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

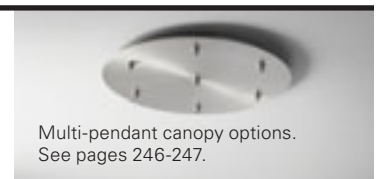

Multi-pendant canopy options. See pages 246-247.

GRATIS PENDANT

LED

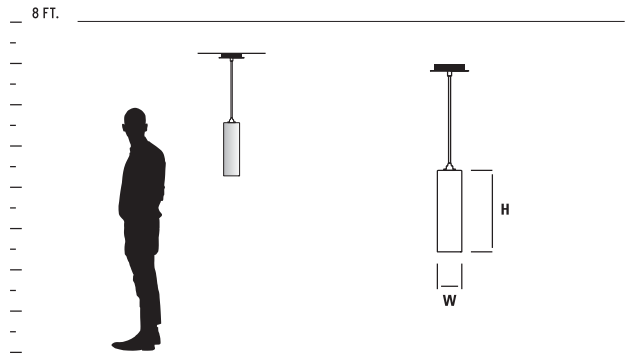


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------|--------------------------|--------------------|---------------------|---|---------------------------------|---------------|
| 3-609-14 | Clear Glass | 14 Polished Chrome | 3.75"(w) x 15.5"(h) | 1 x 6.2w, 90CRI 3000k LED 391 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-609-124 | Satin Opal Glass | 24 Satin Nickel | 3.75"(w) x 15.5"(h) | 1 x 6.2w, 90CRI 3000k LED 391 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-609-1414 | 14 Mirrored Glass | 14 Polished Chrome | 3.75"(w) x 15.5"(h) | 1 x 6.2w, 90CRI 3000k LED 391 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Blown glass is 1/16" thick. • *Height measured not including adjustable cord or ceiling canopy.
- Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

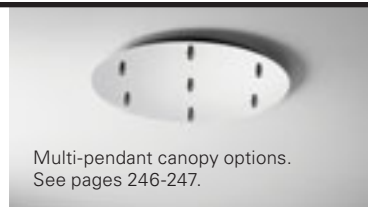

IDOL PENDANT

LED

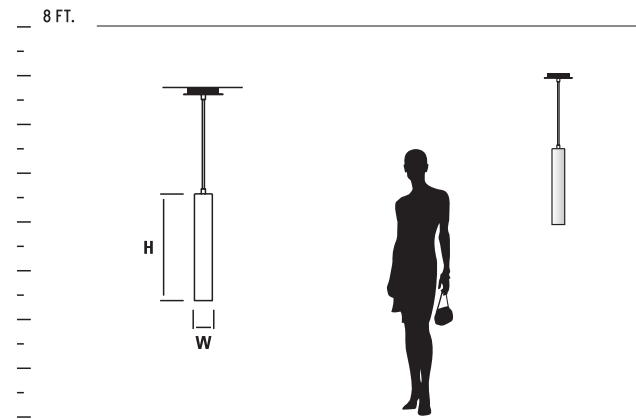


| ITEM # | FINISH/DIFFUSER | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------------------------|----------------------|---|---------------------------------|---------------|
| 3-635-XX | 14 Polished Chrome 24 Satin Nickel | 2.75"(w) x 18.5"(h)* | 1 x 6.2w, 90CRI 3000k LED 334 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

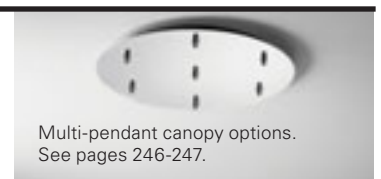


KLONE PENDANT

LED



32-642-15

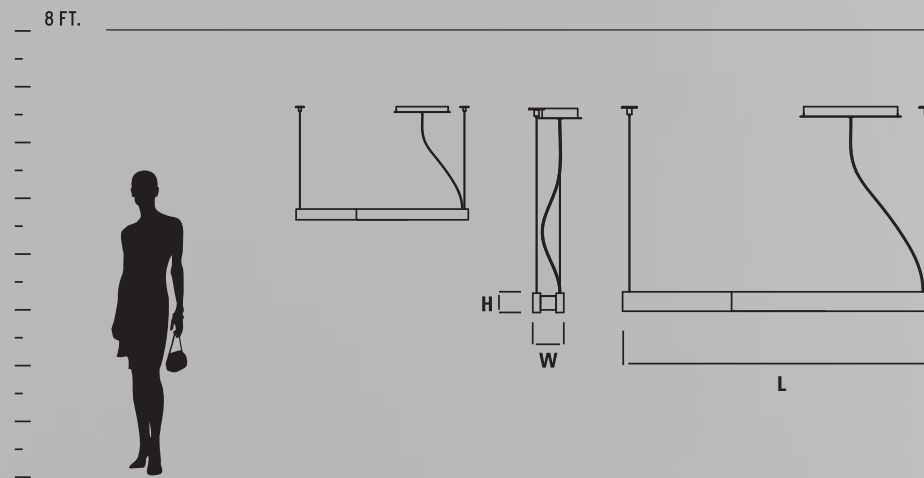



32-642-24



32-642-20

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|---|--------------------------|--|------------------------------|---------------|
| 32-642-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 38"(l) x 4"x(w) 2.5"(h)* | 2 x 25w, 90CRI 3000k LED 745 Delivered Lumens | 120V & 277V 0-10V dimming | damp |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Unit mounts to 4" octagonal junction box. • Fixture supplied with 10' cord and 12.5' aircraft cable. • Total luminaire power 56.7w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

LIBERTY PENDANT

LED

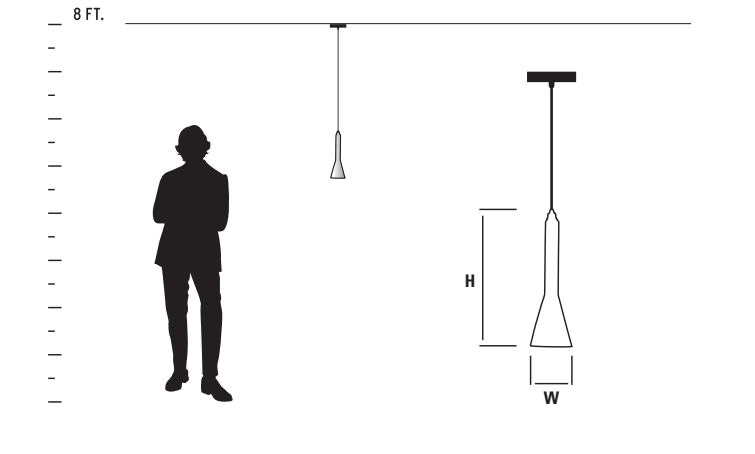

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------|-----------------------|--------------------|--------------------|---|---------------------------------|---------------|
| 3-652-14 | Clear Glass | 14 Polished Chrome | 5"(w) x 16.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 401 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-652-1314 | 13 Smoked Ombre Glass | 14 Polished Chrome | 5"(w) x 16.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 401 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-652-2018 | 20 Coffee Ombre Glass | 18 Gunmetal | 5"(w) x 16.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 401 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel canopy.
- Blown glass is 1/16" thick.
- *Height measured not including adjustable cord or ceiling canopy.
- Fixture supplied with 10' cord.
- Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring.
- Optional multi-pendant canopies available for 3, 5, and 7 lights.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Total luminaire power 7.1w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



LOTUS PENDANT

FLOURESCENT

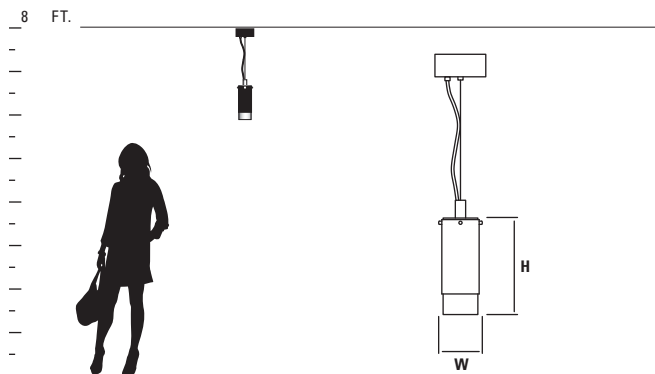


2-6107-24

shown with optional perforated sleeve (Included)



2-6107-24


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | CERTIFICATION |
|------------------|------------------|-----------------|---------------------|---|--------------------------------------|---|
| 2-6107-24 | White Opal Glass | 24 Satin Nickel | 3.25"(w) x 9.5"(h)* | 1 x 13w quad 4-pin fluorescent (G24q-1) | Electronic, HPF, instant start, 120V |  |

GENERAL SPECIFICATIONS:

• Formed steel canopy. • Cold rolled steel housing. • White Opal glass diffuser is 3/16" thick. • *Height measured not including adjustable cord or ceiling canopy. • Optional perforated sleeve included. • Perforated metal overlay in natural steel finish. • Unit mount to standard 4" octagonal junction box. • To avoid possible abnormal end of life, use lamps with integral End of Life protection. • 10' cord provided. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

LUCCI PENDANT

LED

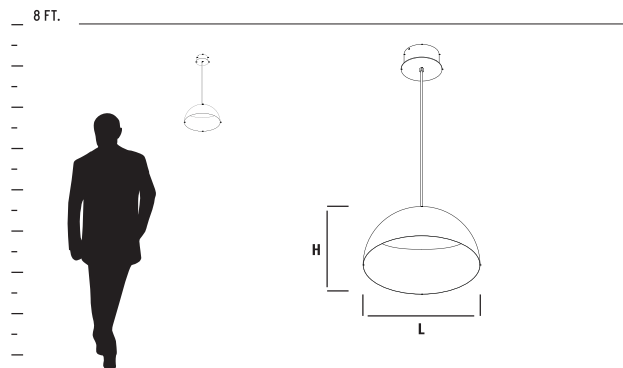

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------------|----------------|---|--------------------------|--------------------------|--------------------|---------------|
| 3-20-XXXX 16" pendant | Aluminum Shade | 650 White/Industrial Brass 1550 Black/Industrial Brass | 15.75"(w) x 8"(h)* | 1 x 18w, 90CRI 3000k LED | 120V Triac dimming | |
| 3-21-XXXX 23" pendant | Aluminum Shade | 650 White/Industrial Brass 1550 Black/Industrial Brass | 23.625"(w) x 11.875"(h)* | 1 x 42w, 90CRI 3000k LED | 120V Triac dimming | |

GENERAL SPECIFICATIONS:


• Cold rolled steel canopy. • Aluminum Shade. • *Height measured not fabric cord or ceiling canopy. • Fixture supplied with 10' adjustable cord to customize hanging height. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

LUNA PENDANT

LED



3-673-24

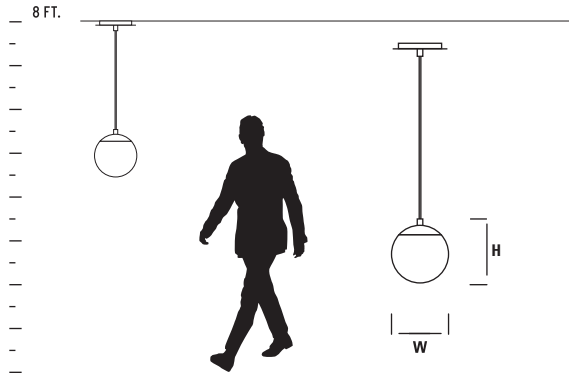

3-671-40




3-670-22

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|------------------|---|---------------------|--|---------------------------------|---------------|
| 3-670-XX | Matte Opal Glass | 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 6"(w) x 8.25"(h)* | 1 x 6.2w, 90CRI 3000k LED 368 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-671-XX | Matte Opal Glass | 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 8"(w) x 9.5"(h)* | 1 x 6.2w, 90CRI 3000k LED 368 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-672-XX | Matte Opal Glass | 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 10"(w) x 13"(h)* | 1 x 10.1w, 90CRI 3000k LED 714 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-673-XX | Matte Opal Glass | 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 12"(w) x 13.75"(h)* | 1 x 10.1w, 90CRI 3000k LED 740 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel housing and canopy. • Matte opal glass is 1/8" thick. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.1w for 3-670-XX and 3-671-XX, 10.5w for 3-672-XX and 3-673-XX.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

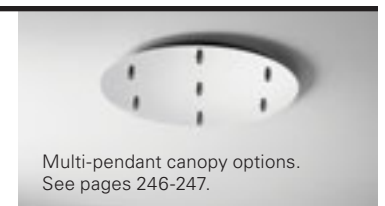

Multi-pendant canopy options. See pages 246-247.


LUPE PENDANT

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------------|---------------------|----------|----------------------|--------------------------|--------------------|---|
| 3-25-15 23" pendant | Matte White Acrylic | 15 Black | 26.325"(w) x 23"(h)* | 6 x 13w, 90CRI 3000k LED | 120V Triac dimming |  |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Matte white acrylic diffuser. • *Height measured not including cables or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Unit mounts to 4" octagonal junction box. • Canopy swivel allows for mounting on sloped ceilings - up to 45-degrees. • Driver mounts inside ceiling canopy. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

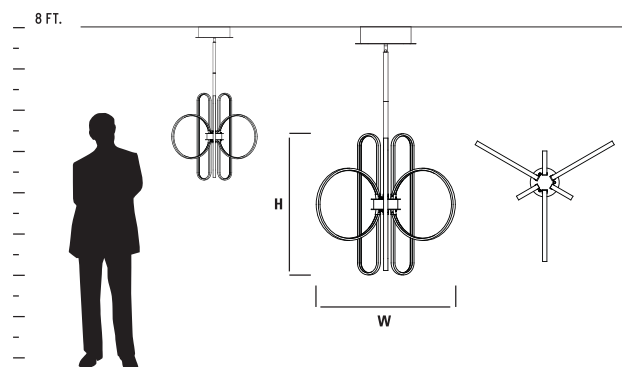

MAGNETA PENDANT

LED




3-607-24



3-607-40



3-607-24

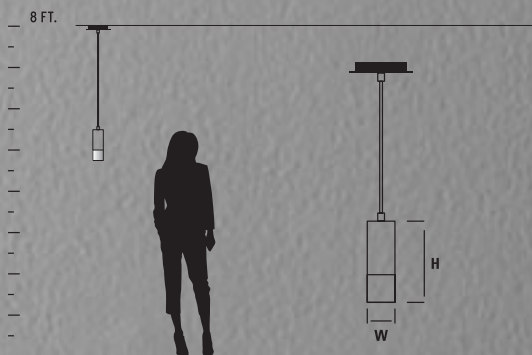


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---------------------|----------------------------------|---------------------|---|---------------------------------|---------------|
| 3-607-XX | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 2.75"(w) x 9.75"(h) | 1 x 6.2w, 90CRI 3000k LED 233 Delivered Lumens | 120/277V 0-10V/Phase dimming | c us |
| 3-607-1XX | 1 Matte Opal Glass | 24 Satin Nickel 40 Aged Brass | 2.75"(w) x 9.75"(h) | 1 x 6.2w, 90CRI 3000k LED 230 Delivered Lumens | 120/277V 0-10V/Phase dimming | c us |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy.
- Matte white acrylic is 1/16" thick.
- Blown glass is 1/8" thick.
- *Height measured not including adjustable cord or ceiling canopy.
- Fixture supplied with 10' cord.
- Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Optional multi-pendant canopies available for 3, 5, and 7 lights.
- Total luminaire power 7.1w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

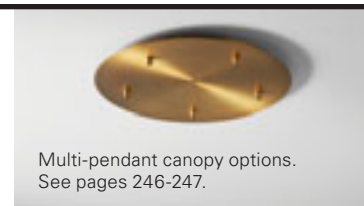

Multi-pendant canopy options.
See pages 246-247.

MAGNUM PENDANT



LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---------------------------|--|-------------------|---|---------------------------------|---------------|
| 3-653-XX | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel 40 Aged Brass | 3.5"(w) x 18"(h)* | 1 x 6.2w, 90CRI 3000k LED 383 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-653-1XX | 1 Matte Opal Glass | 14 Polished Chrome 24 Satin Nickel 40 Aged Brass | 3.5"(w) x 18"(h)* | 1 x 6.2w, 90CRI 3000k LED 416 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Aluminum housing. • Cold rolled steel canopy. • Matte white acrylic is 1/16" thick. • Blown glass is 1/8" thick. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring.. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box.
- Optional multi-pendant canopies available for 3, 5, and 7 lights. • Total luminaire power 7.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

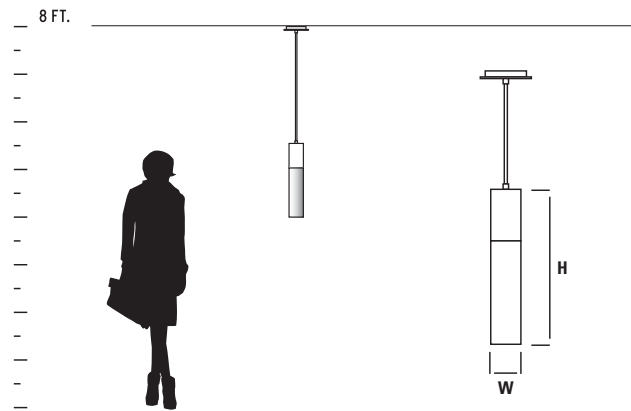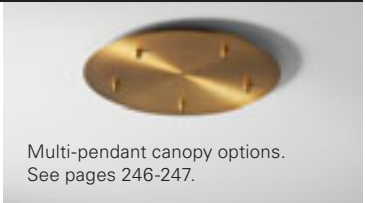

3-653-14

3-653-24

3-653-40

MARIA PENDANT


LED



3-663-1540



3-663-1624

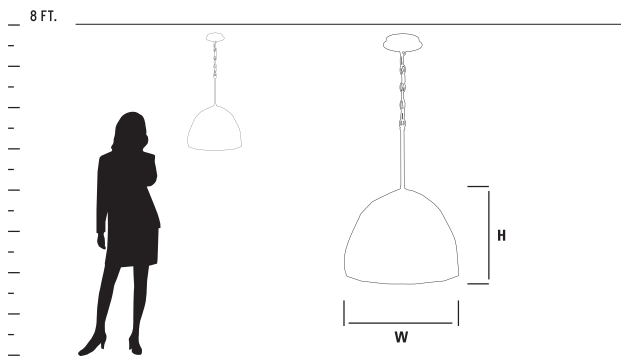


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|------------|----------|---|-----------------|------------------------------------|---------------|
| 3-663-XXXX | Concrete | 1540 Aged Brass/Dark Gray 1624 Satin Nickel/Gray | 16"(w) x 12"(h) | 1 x 24w Medium PAR20/30/38/A21/A19 | ETL damp |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Concrete shade. • *Height measured not including stems, chain or ceiling canopy. • Fixture supplied with 2-8", 2-12", 2-16" and 1' of chain to customize hanging height. • Unit mounts to 4" octagonal junction box capable of supporting 50lbs. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

MONDO PENDANT

LED

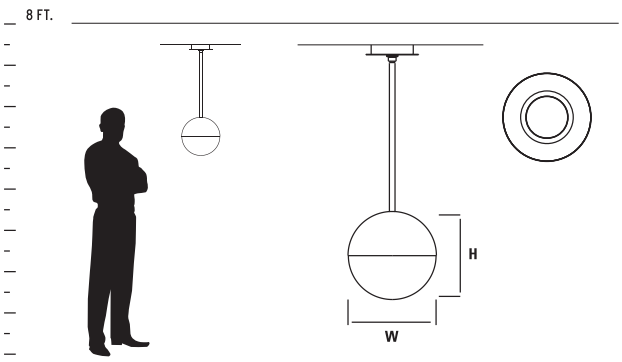



3-6902-24



3-6901-40



3-6900-15

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------------------|------------------|--|------------------|--|--|---------------|
| 3-6900-XX 6" small | Matte Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 6"(w) x 8"(h)* | 1 x 6.1w, 90CRI 3000k LED 394 Delivered Lumens | 120/277V Triac and ELV 0-10 dimming | |
| 3-6901-XX 8" small | Matte Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 8"(w) x 10"(h)* | 1 x 6.1w, 90CRI 3000k LED 351 Delivered Lumens | 120/277V Triac and ELV 0-10 dimming | |
| 3-6902-XX 10" large | Matte Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 10"(w) x 12"(h)* | 1 x 10.1w, 90CRI 3000k LED 626 Delivered Lumens | 120/277V Triac and ELV 0-10 dimming | |
| 3-6903-XX 12" large | Matte Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 12"(w) x 14"(h)* | 1 x 10.1w, 90CRI 3000k LED 564 Delivered Lumens | 120/277V Triac and ELV 0-10 dimming | |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Matte white glass diffuser is 1/16" thick. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.1w for 3-6900-XX and 3-6901-XX, 11.6w for 3-6902-XX. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

NEBULA PENDANT

LED

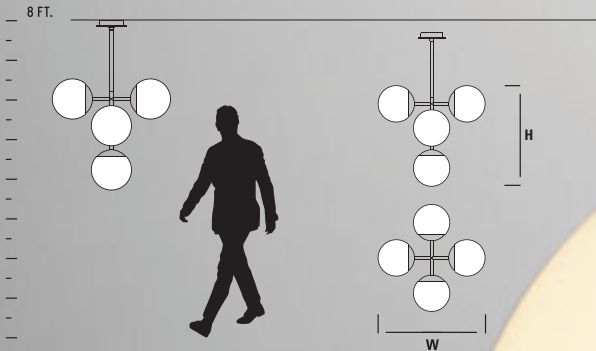



3-680-24



3-681-15

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------|----------------------------|--|-------------------------|--|--------------------|------------------------|
| 3-680-XX (small) | Matte Opal Glass Globes | 15 Black 24 Satin Nickel 40 Aged Brass | 19.375"(w) x 16.75"(h)* | 5 x 6w, 90CRI 3000k LED 1481 Delivered Lumens | 120V triac dimming | ETL _{us} damp |
| 3-681-XX (large) | Matte Opal Glass Globes | 15 Black 24 Satin Nickel 40 Aged Brass | 24.5"(w) x 21.75"(h)* | 5 x 6w, 90CRI 3000k LED 1604 Delivered Lumens | 120V triac dimming | ETL _{us} damp |

GENERAL SPECIFICATIONS:


• Cold rolled steel housing and canopy. • Matte opal glass globes. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees. • Unit mounts to 4" octagonal junction box. • LED driver on board. • Total luminaire power 29.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

NERO PENDANT

LED



3-686-1540


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------|-----------------|-----------------------|------------------------------------|---|--------------------|---|
| 3-686-1540 | Frosted Acrylic | 1540 Black/Aged Brass | 33.5"(l) x 73.75"(w) x 14.125"(h)* | 26 x 2.1w, 90CRI 3000k LED 2045 Delivered Lumens | 120V Triac dimming |  |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Frosted acrylic diffusers. • *Height measured not including adjustable stems or ceiling canopy. • Fixture supplied with 4-8", 4-12" and 6-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings – up to 45-degrees. • Unit mounts to 4" octagonal junction box. • Drivers mounts inside ceiling canopy. • Total luminaire power 64.3w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

OPUS PENDANT

LED

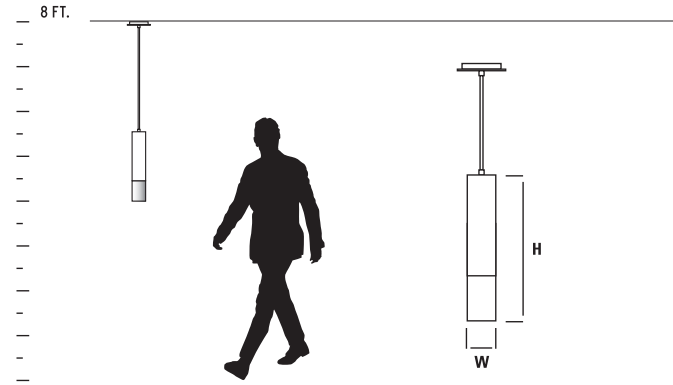


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---------------------|---|-------------------|---|---------------------------------|---------------|
| 3-654-XX | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 3.5"(w) x 18"(h)* | 1 x 6.2w, 90CRI 3000k LED 399 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-654-1XX | 1 Matte Opal Glass | 14 Polished Chrome 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 3.5"(w) x 18"(h)* | 1 x 6.2w, 90CRI 3000k LED 412 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Aluminum housing. • Cold rolled steel canopy. • Matte white acrylic is 1/16" thick. • Blown glass is 1/8" thick. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box.
- Optional multi-pendant canopies available for 3, 5, and 7 lights. • Total luminaire power 7.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

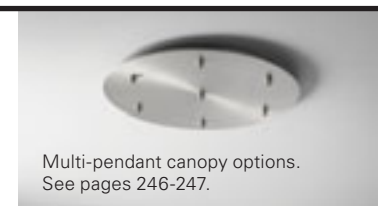

PRIMO PENDANT

LED

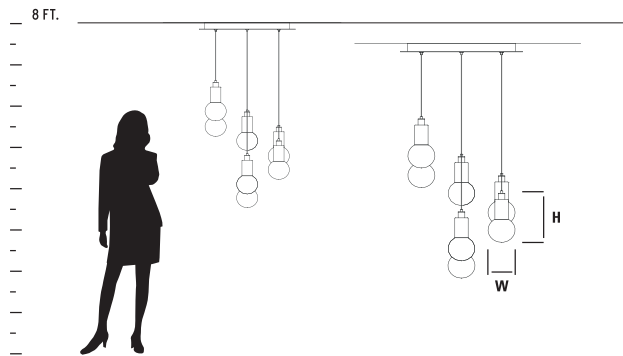

3-674-1624



3-674-1540



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|-------------|----------------------------------|-------------------|---|--------------------|---------------|
| 3-674-XX | Clear Glass | 24 Satin Nickel 40 Aged Brass | 18"(w) x 8.25"(h) | 7 x 2.1w, 90CRI 3000k LED 630 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Blown glass is 1/16" thick. • *Height measured not including adjustable cord or ceiling canopy. • Each lamp supplied with 10' cord. • Unit mounts to 4" octagonal junction box. • Driver mounts inside canopy. • Total luminaire power 18.7w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


ROSWELL PENDANT

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------------------|---------------------|---|-----------------------|---|--------------------|---|
| 3-62-XX 16" small | Matte White Acrylic | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 15.75"(w) x 3.25"(h)* | 1 x 30w, 90CRI 3000k LED 2490 Delivered Lumens | 120V Triac dimming |  |
| 3-63-XX 24" large | Matte White Acrylic | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 23.5"(w) x 3.25"(h)* | 1 x 44w, 90CRI 3000k LED 3746 Delivered Lumens | 120V Triac dimming |  |


GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Matte white acrylic diffuser is 1/16" thick. • *Height measured not including adjustable cables or ceiling canopy. • Fixture supplied with 10' adjustable cables. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 29.8w for 3-62-XX and 43.8w for 3-63-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

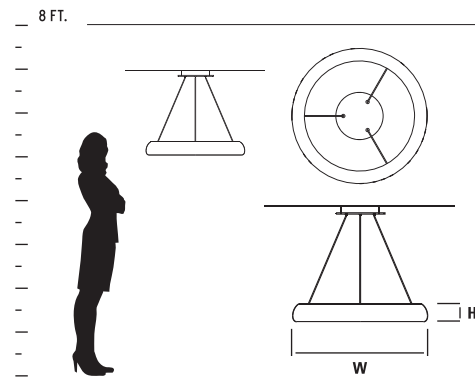

RUVO PENDANT

LED

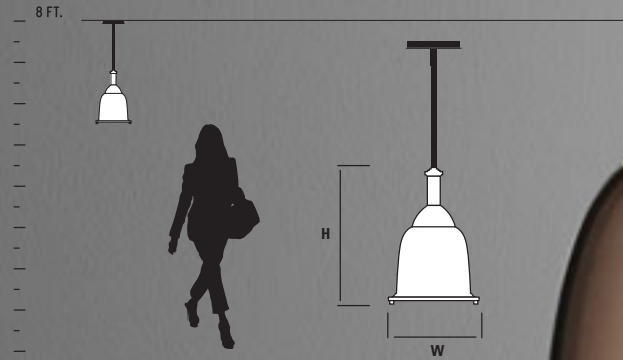

3-6202-25



3-6202-24



3-6202-22

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|-----------|--------------------------------------|---|----------------------|--|---------------|
| 3-6202-XX | Steel shade with White Tiffany glass | 22 Oiled Bronze 24 Satin Nickel 25 Satin Copper | 10.5"(w) x 16.5"(h)* | 1 x 24w MAX PAR20/30/38, A21,A19 Medium Base 120V LED only (lamp not included) | |

GENERAL SPECIFICATIONS:

- Cold rolled Steel Canopy. • White Tiffany glass diffuser. • *Height measured not including stem or ceiling canopy. • Stem is custom cut at oxygen facility to customer's specification (maximum stem length 60"). • Toolless lamp access. • Canopy swivel allows for mounting on sloped ceilings – up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

SPACELY PENDANT

LED



3-646-1540



3-647-1540

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------------------------------|---------------------|-----------------------|------------------------|----------------------------|--------------------|---------------|
| 3-646-1540 18" pendant | Matte White Acrylic | 1540 Black/Aged Brass | 17.75"(w) x 8.625"(h)* | 1 x 12.5w, 90CRI 3000k LED | 120V Triac dimming | |
| 3-647-1540 26" pendant | Matte White Acrylic | 1540 Black/Aged Brass | 25.625"(w) x 10"(h)* | 1 x 25w, 90CRI 3000k LED | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Matte white acrylic diffuser. • *Height measured not including adjustable stems or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Unit mounts to 4" octagonal junction box. • Canopy swivel allows for mounting on sloped ceilings – up to 45-degrees. • Driver mounts inside ceiling canopy. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

SPINDLE PENDANT


LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------|-----------------------|--------------------|-----------------|---|---------------------------------|---------------|
| 3-656-14 | Clear Glass | 14 Polished Chrome | 5"(w) x 19"(h)* | 1 x 6.2w, 90CRI 3000k LED 406 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-656-1314 | 13 Smoked Ombre Glass | 14 Polished Chrome | 5"(w) x 19"(h)* | 1 x 6.2w, 90CRI 3000k LED 406 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-656-2018 | 20 Coffee Ombre Glass | 18 Gunmetal | 5"(w) x 19"(h)* | 1 x 6.2w, 90CRI 3000k LED 406 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Blown glass is 1/16" thick. • *Height measured not including adjustable cord or ceiling canopy.
- Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Total luminaire power 7.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

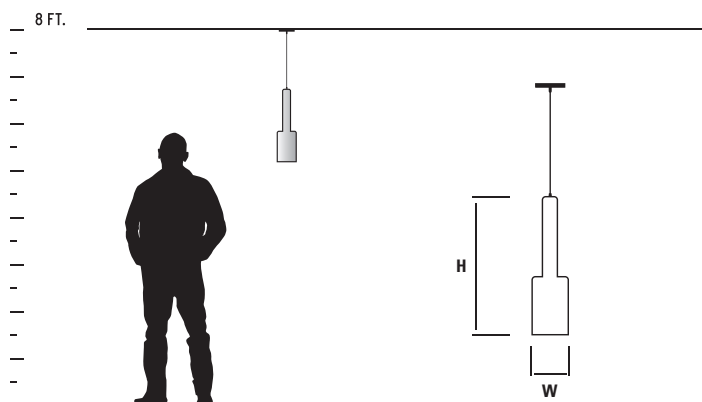

SPIRIT PENDANT

LED

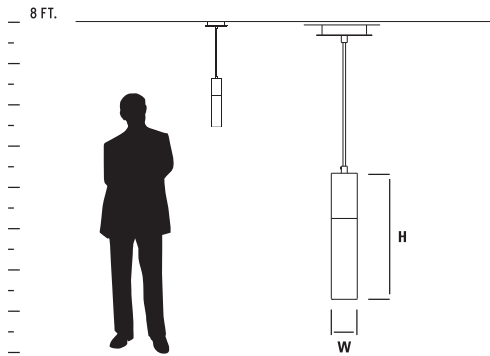

3-68-6

3-68-15

3-68-40



3-69-24



3-69-15




3-69-40

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------|--------------------|---|-----------------------|---|---|---------------|
| 3-68-XX | Clear Bubble Glass | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 2.75"(w) x 5.5"(h) | 1 x 6.2w, 90CRI 3000k LED 426 Delivered Lumens | 120/277V Triac and ELV 0-10V/Phase dimming | cULus damp |
| 3-69-XX | Clear Bubble Glass | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 2.75"(w) x 13.875"(h) | 1 x 6.2w, 90CRI 3000k LED 298 Delivered Lumens | 120/277V Triac and ELV 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Clear bubble glass. • *Height measured not including adjustable cord or ceiling canopy.
- Fixture supplied with 10' cord. • Unit mounts to 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Optional multi-pendant canopies available for 3, 5, and 7 lights. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 7.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

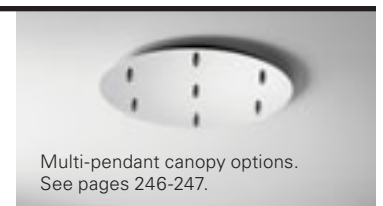


Multi-pendant canopy options.
See pages 246-247.

STYLUS PENDANT

LED



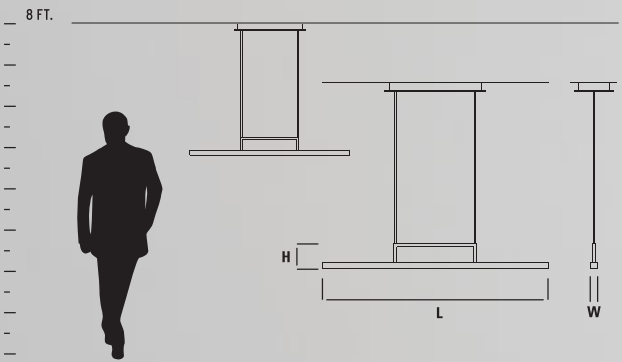

3-66-15





3-67-24


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------------------|---------------------|---|------------------------------|--|--------------------|---|
| 3-66-XX 34" pendant | Matte White Acrylic | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 33.5"(l) x 1"(w) x 3.75"(h)* | 1 x 19w, 90CRI 3000k LED 367 Delivered Lumens | 120V Triac dimming |  |
| 3-67-XX 48" pendant | Matte White Acrylic | 6 White 15 Black 24 Satin Nickel 40 Aged Brass | 47.5"(l) x 1"(w) x 3.75"(h)* | 1 x 25w, 90CRI 3000k LED 583 Delivered Lumens | 120V Triac dimming |  |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Matte white silicone diffuser is 1/16" thick. • *Height measured not including cables or ceiling canopy. • Fixture supplied with 8' adjustable cable to customize hanging height. • Unit mounts to 4" octagonal junction box. • Driver mounts inside ceiling canopy. • Total luminaire power 17.7w for 3-66-XX and 23.6w for 3-67-XX.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

TERRA PENDANT

LED

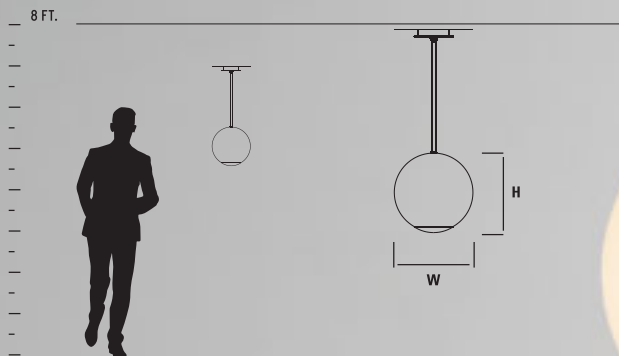

3-691-24



3-691-15



3-690-40


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|------------------|--|----------------------|--|--------------------|---------------|
| 3-690-XX small | Matte Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 10"(w) x 11.625"(h)* | 1 x 11w, 90CRI 3000k LED 565 Delivered Lumens | 120V Triac dimming | |
| 3-691-XX large | Matte Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 12"(w) x 14"(h)* | 1 x 11w, 90CRI 3000k LED 582 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel canopy. • Matte white glass diffuser is 1/16" thick. • *Height measured not including stem or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 3-16" stems to customize hanging height. • Canopy swivel allows for mounting on sloped ceilings - up to 20-degrees • Unit mounts to 4" octagonal junction box. • Unit requires 2.5" deep junction box. • LED driver on board • Total luminaire power 11.7w for 3-690-XX and 11.8w for 3-691-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

TOTEM PENDANT

LED

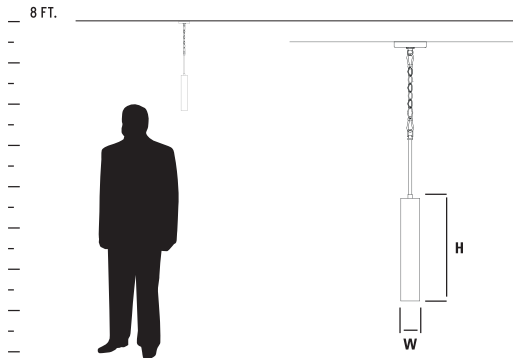

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------|----------|---|---------------------|---|--------------------------|---------------|
| 3-614-XXXX | Concrete | 1540 Aged Brass/Dark Gray 1624 Satin Nickel/Gray | 2.75"(w) x 16.5"(h) | 1 x 6.2w, 90CRI 3000k LED 303 Delivered Lumens | 120V Triac + ELV dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel canopy. • Concrete shade. • *Height measured not including adjustable stems, chain or ceiling canopy. • Fixture supplied with 2-8", 2-12" and 2-16" stems and 1' of chain to customize hanging height. • Unit mounts to 4" octagonal junction box. • LED driver on board. • Total luminaire power 6w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


VIDA PENDANT

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|-----------|--------------------------------------|------------------------------------|--------------------|--|---------------|
| 3-6203-XX | Steel shade with White Tiffany glass | 22 Oiled Bronze 24 Satin Nickel | 16.5"(w) x 13"(h)* | 1 x 24w MAX PAR20/30/38, A21,A19 Medium Base 120V LED only (lamp not included) | cULus damp |


GENERAL SPECIFICATIONS:

- Cold rolled Steel Canopy. • White Tiffany glass diffuser. • *Height measured not including stem or ceiling canopy. • Stem is custom cut at oxygen facility to customer's specification (maximum stem length 60"). • Toolless lamp access. • Canopy swivel allows for mounting on sloped ceilings – up to 20-degrees. • Unit mounts to 4" octagonal junction box. • Visit www.oxygenlighting.com for technical cut sheets • Oxygen reserves the right to modify designs at any time.

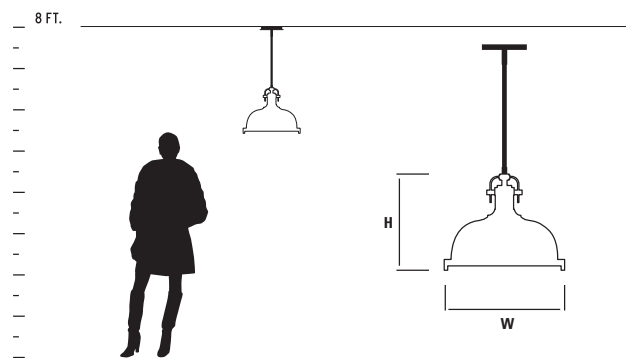

ZEPP PENDANT

LED

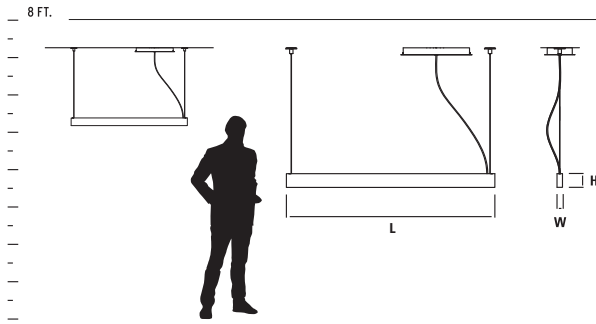

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|---|--------------------------|--|------------------------------|---------------|
| 32-632-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 38"(l) x 1"(w) x 2.5"(h) | 1 x 33w, 90CRI 3000k LED 635 Delivered Lumens | 120V & 277V 0-10V Dimming | UL US damp |
| 32-633-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 50"(l) x 1"(w) x 2.5"(h) | 2 x 25w, 90CRI 3000k LED 863 Delivered Lumens | 120V & 277V 0-10V Dimming | UL US damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Cold rolled steel housing and canopy. • *Height measured not including adjustable cord or ceiling canopy. • Fixture supplied with 10' cord and 12.5' aircraft cable. • Unit mounts to 4" octagonal junction box. • Total luminaire power 38.3w for 32-632-XX and 56.1w for 32-633-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.





vanities



ADAGIO VANITY

ADA

LED

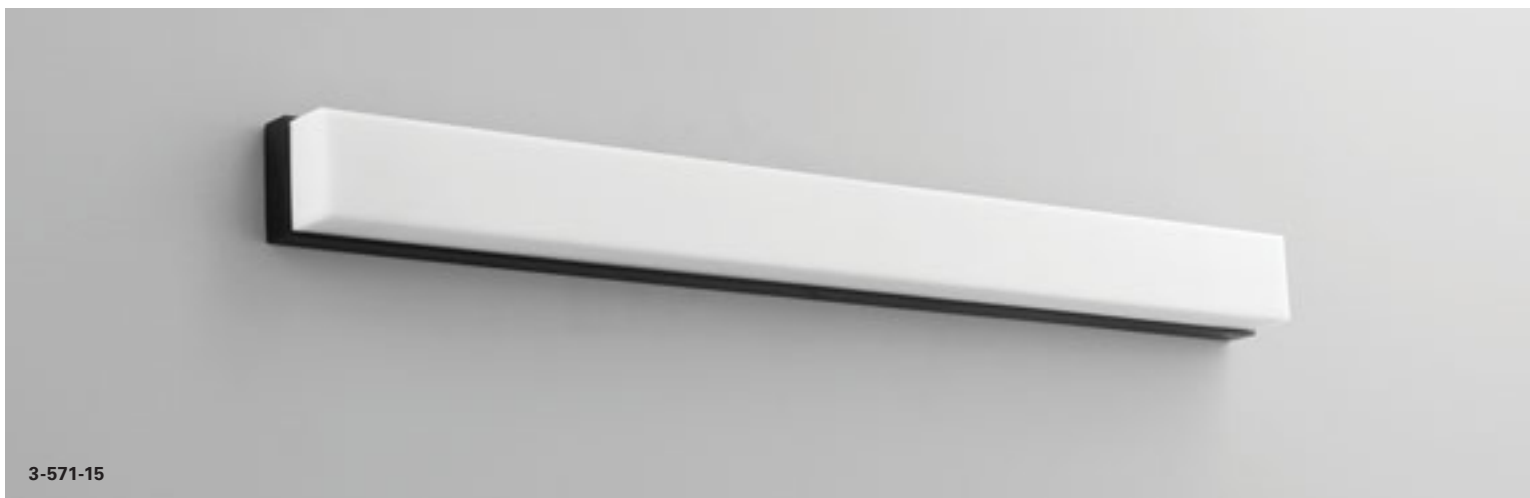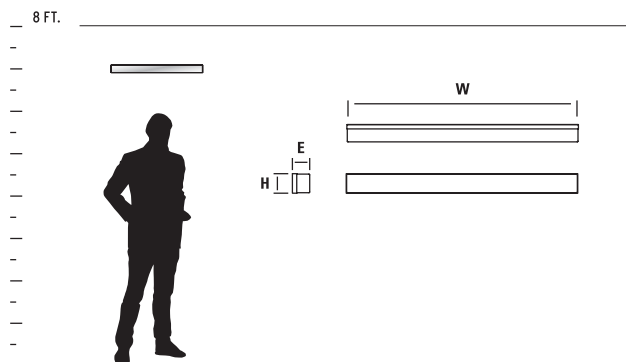

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|--------------------------------|---|---------------------------------|---------------|
| 3-571-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 26.75"(w) x 2.25"(h) x 2"(ext) | 1 x 11.9w, 90CRI 3000k LED 1180 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to deep 4"x4" square junction box w/ single device mud ring. • Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 14.2w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

ADELPHI VANITY

ADA

LED

FLOURESCENT

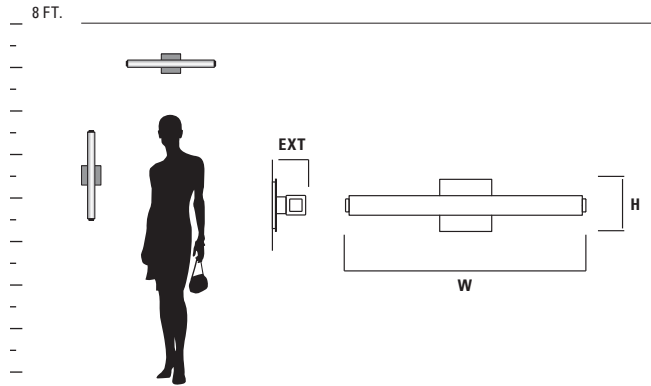

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|-----------------|---------------------|---|--------------------------------------|--|---|-------------------------------|----------------------------|
| 2-5170-224 | Matte White Acrylic | 24 Satin Nickel | 24.25" (w) x 5.25" (h) x 3.5" (ext) | 1 x 14w T5 fluorescent (mini bi-pin) 729 Delivered Lumens | Electronic, HPF, Programmed Start, Universal Voltage (120-277V) | -- | ADA COMPLIANT, cUL US damp |
| 3-537-XX small | Matte White Acrylic | 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 24.25" (w) x 4.75" (h) x 3.5" (ext) | 1 x 11.6w, 90CRI 3000k LED 1258 Delivered Lumens | -- | 120/277V 0-10V/Phase dimming. | ADA COMPLIANT, cUL US damp |
| 3-555-XX medium | Matte White Acrylic | 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 36" (w) x 4.75" (h) x 3.5" (ext) | 2 x 11.6w, 90CRI 3000k LED | -- | 120/277V 0-10V/Phase dimming. | ADA COMPLIANT, cUL US damp |
| 3-536-XX large | Matte White Acrylic | 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 46.375" (w) x 4.75" (h) x 3.5" (ext) | 2 x 11.6w, 90CRI 3000k LED 2490 Delivered Lumens | -- | 120/277V 0-10V/Phase dimming. | ADA COMPLIANT, cUL US damp |

2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Installs on 4" octagonal junction box. • Toolless access to lamp for fluorescent model. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Total luminaire power for 3-536-XX is 28w and for 3-537-XX is 14.1w. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire power and lumen information for 3-555-XX. • Oxygen reserves the right to modify designs at any time.


ALCOR VANITY

ADA

LED



3-533-22

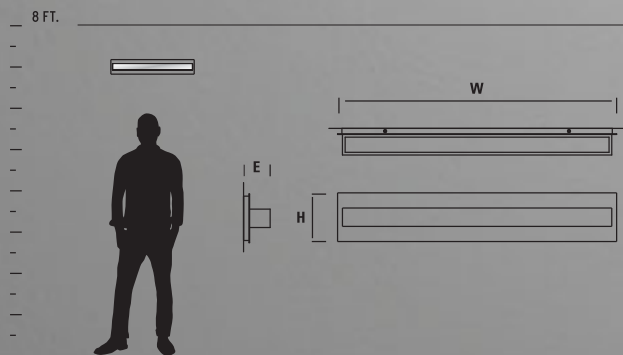







3-533-22



3-533-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|------------------------------------|------------------------------|--|----------------------------------|---|
| 3-533-XX | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 26"(w) x 4.5"(h) x 2.5"(ext) | 1 x 11.6w, 90CRI 3000k LED 521 Delivered Lumens | 120V/277V 0-10V/Phase dimming |     |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • 1/8" thick matte white acrylic. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ round mud ring mounting holes 2.75" on center. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box.
- Total luminaire power 14.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

APOLLO VANITY

ADA

FLOURESCENT

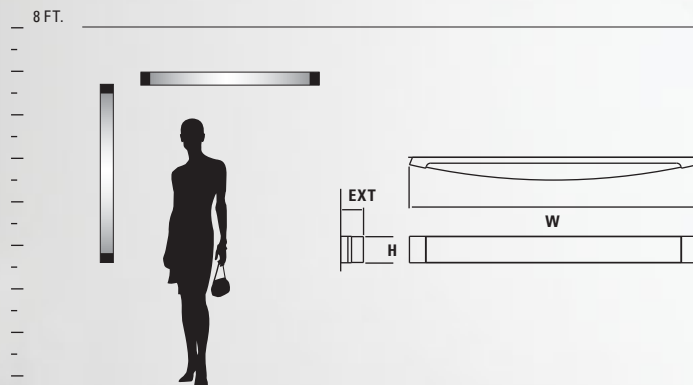

2-5104-24



2-5105-14

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | CERTIFICATION |
|----------------------------|---------------------|---------------------------------------|-----------------------------------|--|--|---------------|
| 2-5104-24 small | Matte White Acrylic | 24 Satin Nickel | 25.25"(w) x 4.75"(h) x 3"(ext) | 2 x 14w T5 linear fluorescent (mini bi-pin) 793 Delivered Lumens | Electronic HPF, Rapid Start, Universal Voltage (120-277V) | |
| 2-5105-XX medium | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 37.25"(w) x 4.75"(h) x 3.75"(ext) | 2 x 21w T5 linear fluorescent (mini bi-pin) 1455 Delivered Lumens | Electronic HPF, Rapid Start, Universal Voltage (120-277V) | |
| 2-5106-XX large | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 49"(w) x 4.75"(h) x 4"(ext) | 2 x 28w T5 linear fluorescent (mini bi-pin) 1886 Delivered Lumens | Electronic HPF, Programmed Start, Universal Voltage (120-277V) | |


GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Diffusers are 1/8" thick matte white acrylic.
- Installs to 4" octagonal junction box.
- Toolless access to lamps.
- Approved for vertical or horizontal mounting.
- Approved for wall applications only.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

APOLLO VANITY

ADA

LED

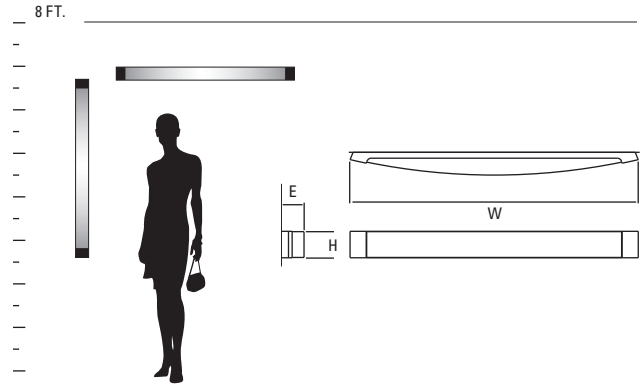

3-524-24



3-524-14



3-525-22

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|---------------------|--|----------------------------------|---|---------------------------------|----------------------------|
| 3-524-XX small | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel | 27.75"(w) x 2.75"(h) x 2.5"(ext) | 2 x 10.1w, 90CRI 3000k LED 1727 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT, cULus, damp |
| 3-525-XX medium | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel | 31.75"(w) x 2.75"(h) x 2.5"(ext) | 2 x 12.1w, 90CRI 3000k LED 1751 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT, cULus, damp |
| 3-526-XX large | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel | 54"(w) x 2.75"(h) x 2.5"(ext) | 2 x 11.6w, 90CRI 3000k LED 2370 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT, cULus, damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing and trim.
- Diffusers are 1/8" thick matte white acrylic.
- Unit mounts to a deep 4"x4" junction box w/ single device mud ring.
- Approved for horizontal or vertical mounting.
- Approved for wall mount applications only.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Total luminaire power 26.1w for 3-524-XX, 28.9w for 3-525-XX, and 29.5w for 3-526-XX.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

ARCHER VANITY

ADA

LED

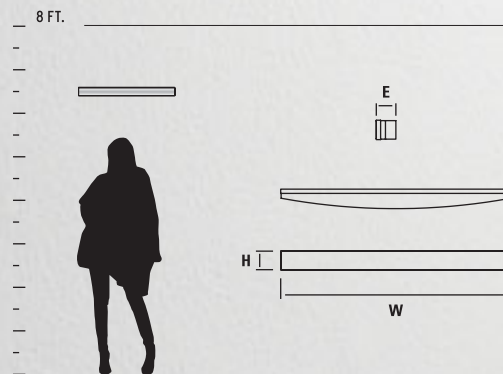

3-575-24



3-575-20

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|----------------------------------|---|---------------------------------|---------------|
| 3-575-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 26.75"(w) x 2.25"(h) x 2.5"(ext) | 1 x 11.9w, 90CRI 3000k LED 1206 Delivered Lumens | 120/277V 0-10V/Phase dimming | |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to deep 4"x4" square junction box w/ a single device mud ring. • Approved for wall mount application only. • Approved for vertical or horizontal mounting. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 14.2w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

AXEL VANITY

ADA LED

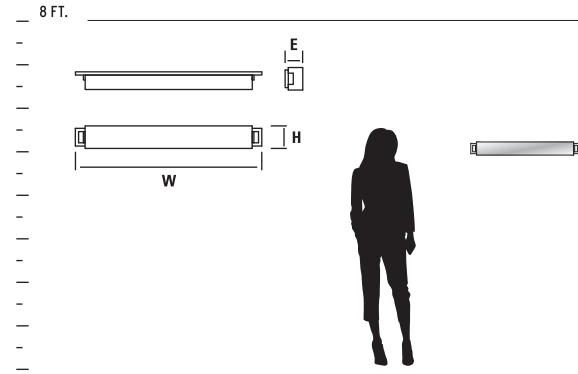

3-552-20



3-552-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|-------------------------------|---|---------------------------------|-------------------|
| 3-552-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 29"(w) x 3.5"(h) x 2.75"(ext) | 1 x 11.9w, 90CRI 3000k LED 1297 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA cULus damp |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to a deep 4"x4" square junction box w/ a single device mud ring. • Approved for wall mount application only. • Approved for vertical or horizontal mounting. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 14.2w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

BALANCE VANITY

ADA LED

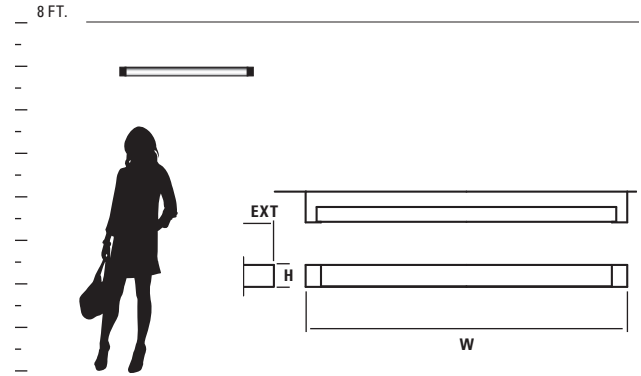

3-547-BP20



3-549-BP424



3-549-BP24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---|---------------------|---------------------------------------|---------------------------------|---|---------------------------------|----------------------------|
| 3-547-XX small | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 24.75"(w) x 2.5"(h) x 3.5"(ext) | 1 x 11.9w, 90CRI 3000k LED 1020 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL us damp |
| 3-547-XX-BP2XX small w/ backplate | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 29"(w) x 4.5"(h) x 4"(ext) | 1 x 11.9w, 90CRI 3000k LED 1020 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL us damp |
| 3-549-XX large | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 48.5"(w) x 2.5"(h) x 3.5"(ext) | 2 x 11.9w, 90CRI 3000k LED 2022 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL us damp |
| 3-549-XX-BP4XX large w/ backplate | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 52.75"(w) x 4.5"(h) x 4"(ext) | 2 x 11.9w, 90CRI 3000k LED 2022 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL us damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Diffusers are 1/8" thick matte white acrylic. • All units mount to deep 4"x4" square junction box w/ a single device mud ring or deep 4" octagonal junction box with optional accessory backplate. • Approved for horizontal mounting only. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 14.2w for 3-547-XX and 27.8w for 3-549-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.



CRESCENT VANITY

ADA

LED



3-582-24

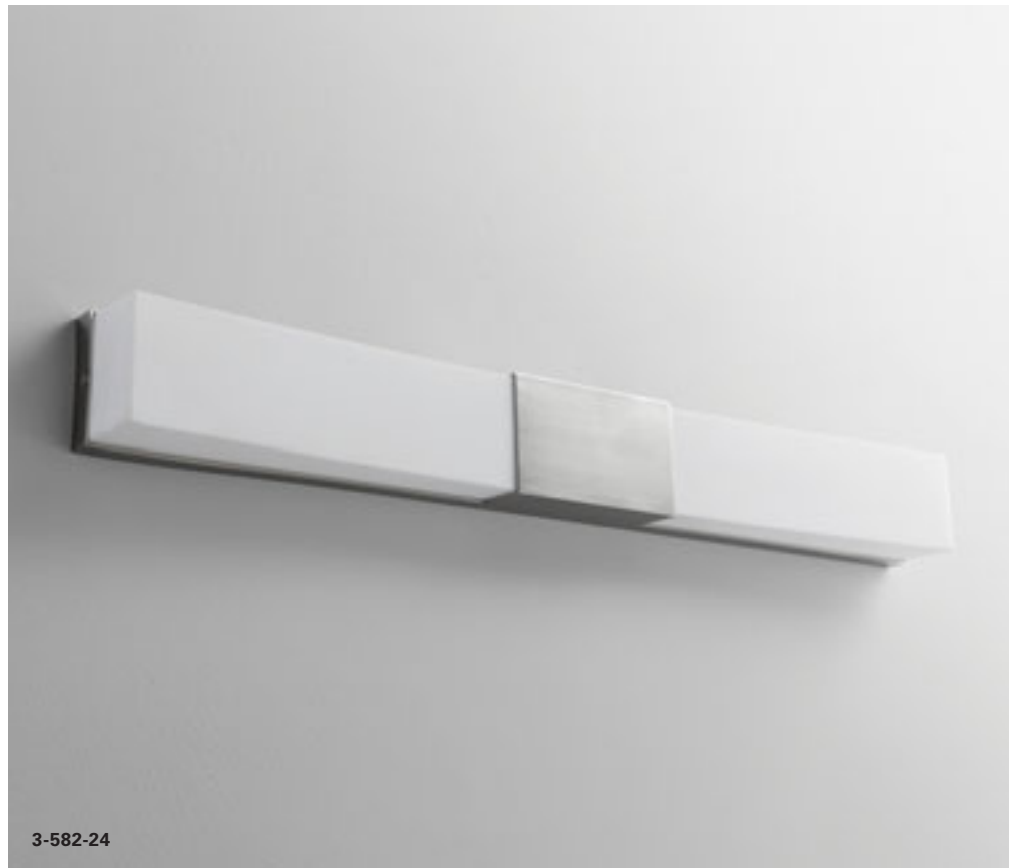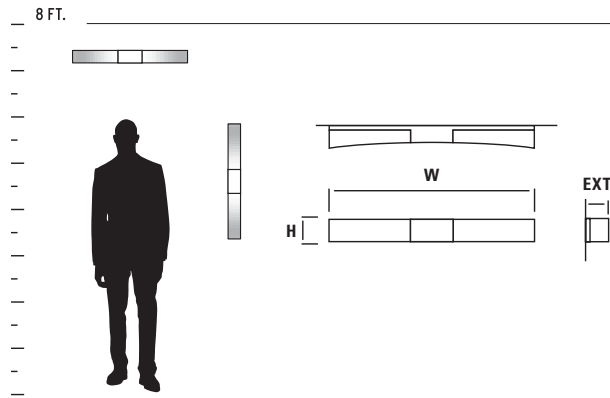

3-582-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|-----------------|------------------------------|---|---------------------------------|---------------|
| 3-582-24 | Matte White Acrylic | 24 Satin Nickel | 30.5"(w) x 3.5"(h) x 3"(ext) | 2 x 12.1w, 90CRI 3000k LED 1864 Delivered Lumens | 120/277V 0-10V/Phase dimming | |



2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Cold rolled steel housing and trim. • Diffusers are 1/8" thick matte white acrylic. • Unit mounts to 2"x3" junction box, 4" octagonal junction box, or deep 4"x4" square junction box w/ a single device mud ring. • Approved for horizontal or vertical mounting. • Approved for wall mount applications only. • Total luminaire power 28.9w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

FUGIT VANITY


ADA LED

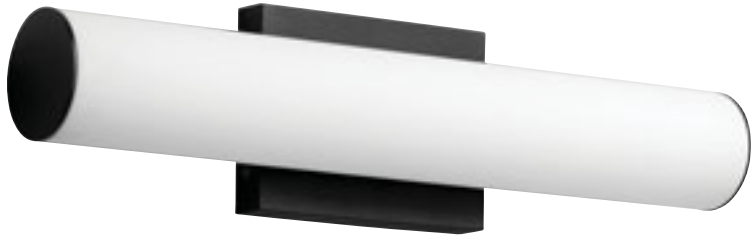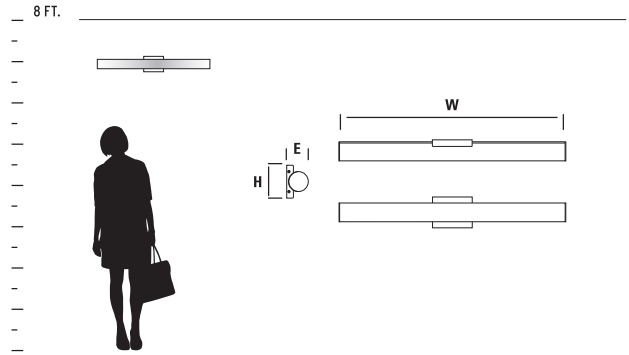

3-5011-15



3-5012-20

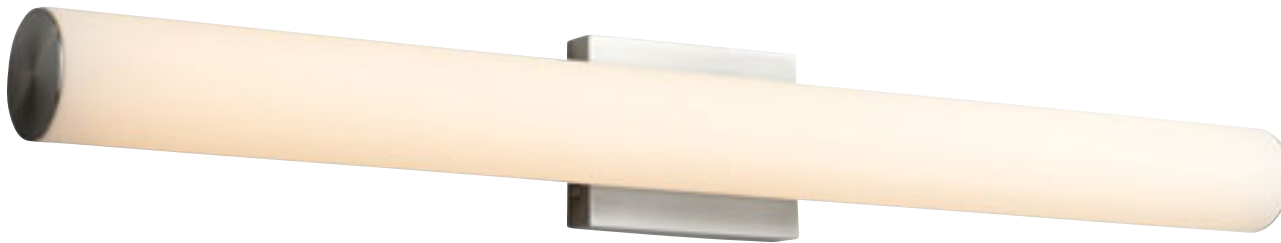

3-5013-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------|---------------------|---|------------------------------------|---|--------------------|-----------------------------|
| 3-5011-XX small | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 17.625"(w) x 4.5"(h) x 3.125"(ext) | 1 x 13w, 90CRI 3000k LED 1062 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT c ETL US damp |
| 3-5012-XX medium | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 23.25"(w) x 4.5"(h) x 3.125"(ext) | 2 x 9w, 90CRI 3000k LED 1504 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT c ETL US damp |
| 3-5013-XX large | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 34.25"(w) x 4.5"(h) x 3.125"(ext) | 2 x 13w, 90CRI 3000k LED 2205 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT c ETL US damp |

GENERAL SPECIFICATIONS:


• Cold rolled steel housing. • Cast steel end caps. • 1/8" thick matte white acrylic. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power for 3-5011 is 15.5w, 3-5012 is 23w and 3-5013 is 32.9w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

FUSE VANITY

ADA

LED

FLOURESCENT

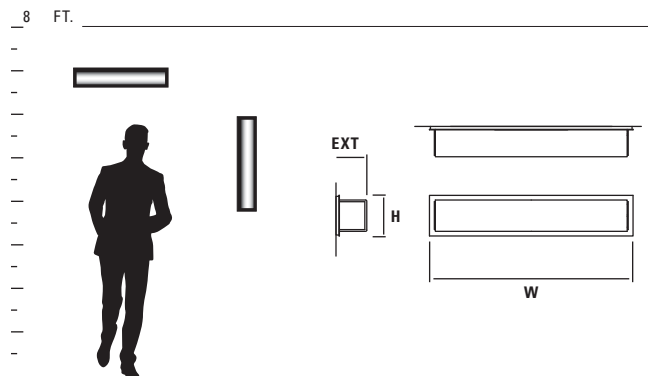

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|-----------|---------------------|-----------------|--------------------------|--|---|------------------------------|---------------|
| 2-5134-24 | Matte White Acrylic | 24 Satin Nickel | 26"(w) x 5"(h) x 4"(ext) | 2 x 17w T8 fluorescent (medium bi-pin) | Electronic, HPF, Instant Start, Universal Voltage (120V-277V) | - | |
| 3-544-24 | Matte White Acrylic | 24 Satin Nickel | 26"(w) x 5"(h) x 4"(ext) | 2 x 10.1w, 90CRI 3000k LED 1810 Delivered Lumens | - | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com



GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Machined steel end caps. • Acrylic diffusers are formed, 1/8" thick matte white acrylic. • Unit mounts to 4" octagonal junction box, with additional holes provided to mount direct to structure. • Approved for wall mount application only. • Toolless access to lamps for fluorescent model. • Approved for vertical or horizontal mounting. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 24.1w for LED models. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

MAGNETA VANITY

ADA

LED

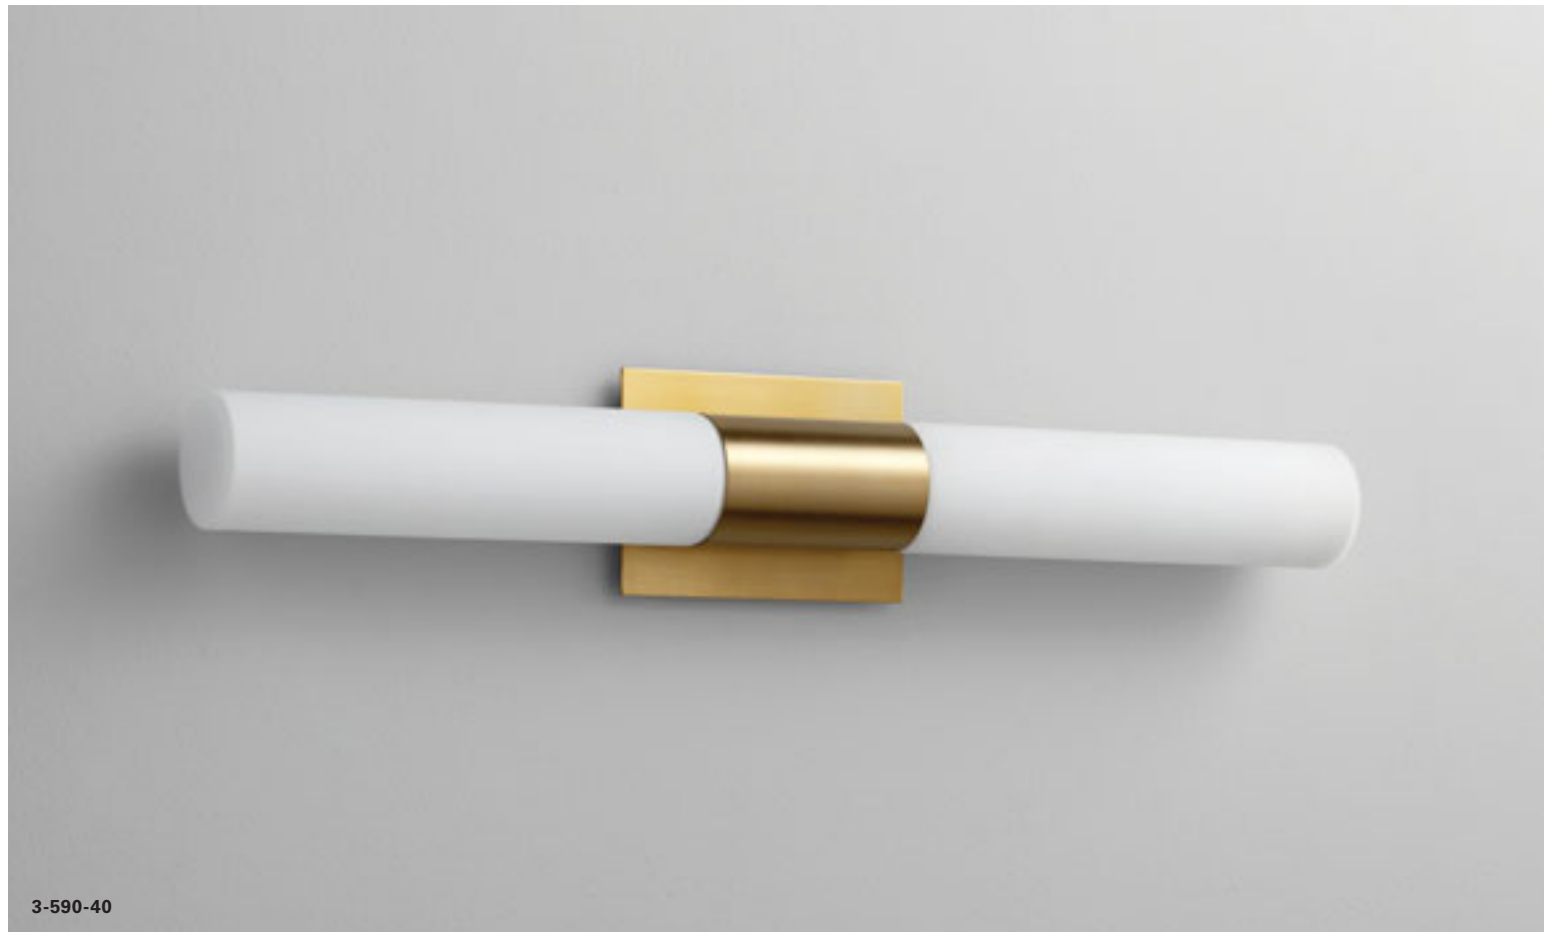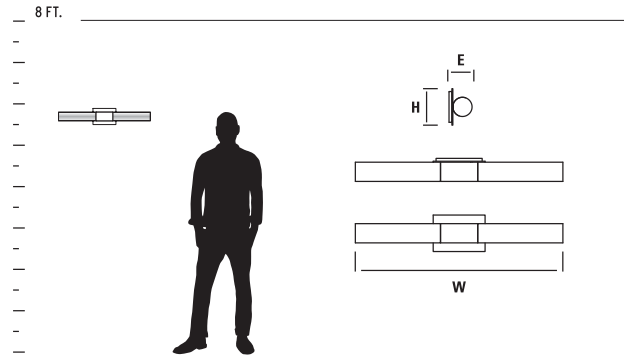

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---------------------|----------------------------------|---------------------------------|---|---------------------------------|-------------------|
| 3-590-XX | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 27"(w) x 4.75"(h) x 3.375"(ext) | 2 x 12.1w, 90CRI 3000k LED 1872 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA CULUS damp |
| 3-590-1XX | 1 Matte Opal Glass | 24 Satin Nickel 40 Aged Brass | 27"(w) x 4.75"(h) x 3.375"(ext) | 2 x 12.1w, 90CRI 3000k LED 2067 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA CULUS damp |

2700k, 3500k, 4000k color temperatures also available. Visit www.oxygenlighting.com

GENERAL SPECIFICATIONS:

- Aluminum housing. • Diffuser is 1/8" thick matte white acrylic or matte opal glass. • Unit mounts to deep 4" octagonal junction box or a deep 4"x4" square junction box w/ single device mud ring. • Approved for wall mount application only. • Closed ends. • Approved for vertical or horizontal mounting. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 28.7w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

MAGNUM VANITY

ADA


LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|----------------------------------|--------------------------------|---|---|----------------------|
| 3-588-XX | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 30.75"(w) x 4.75"(h) x 4"(ext) | 2 x 12.1w, 90CRI 3000k LED 2256 Delivered Lumens | 120/277V 0-10V/Phase dimming available | ADA cULus damp |
| 3-588-1XX | 1 Matte Opal Glass | 24 Satin Nickel 40 Aged Brass | 30.75"(w) x 4.75"(h) x 4"(ext) | 2 x 12.1w, 90CRI 3000k LED 2369 Delivered Lumens | 120/277V 0-10V/Phase dimming available | ADA cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Aluminum housing. • Diffuser is 1/8" thick matte white acrylic or matte opal glass. • Unit mounts to deep 4" octagonal junction box or a deep 4"x4" square junction box w/ single device mud ring. • Approved for wall mount application only. • Closed ends. • Approved for vertical or horizontal mounting. • Total luminaire power 28.7w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

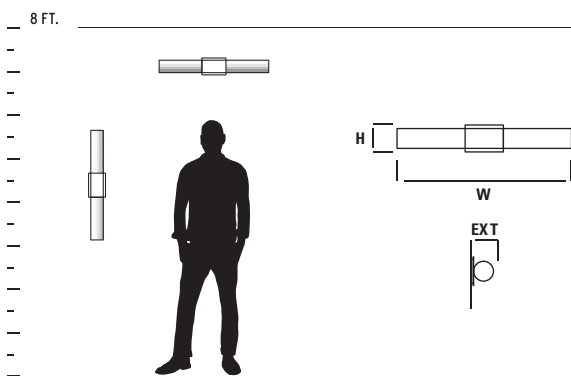


METRIX VANITY

ADA

LED

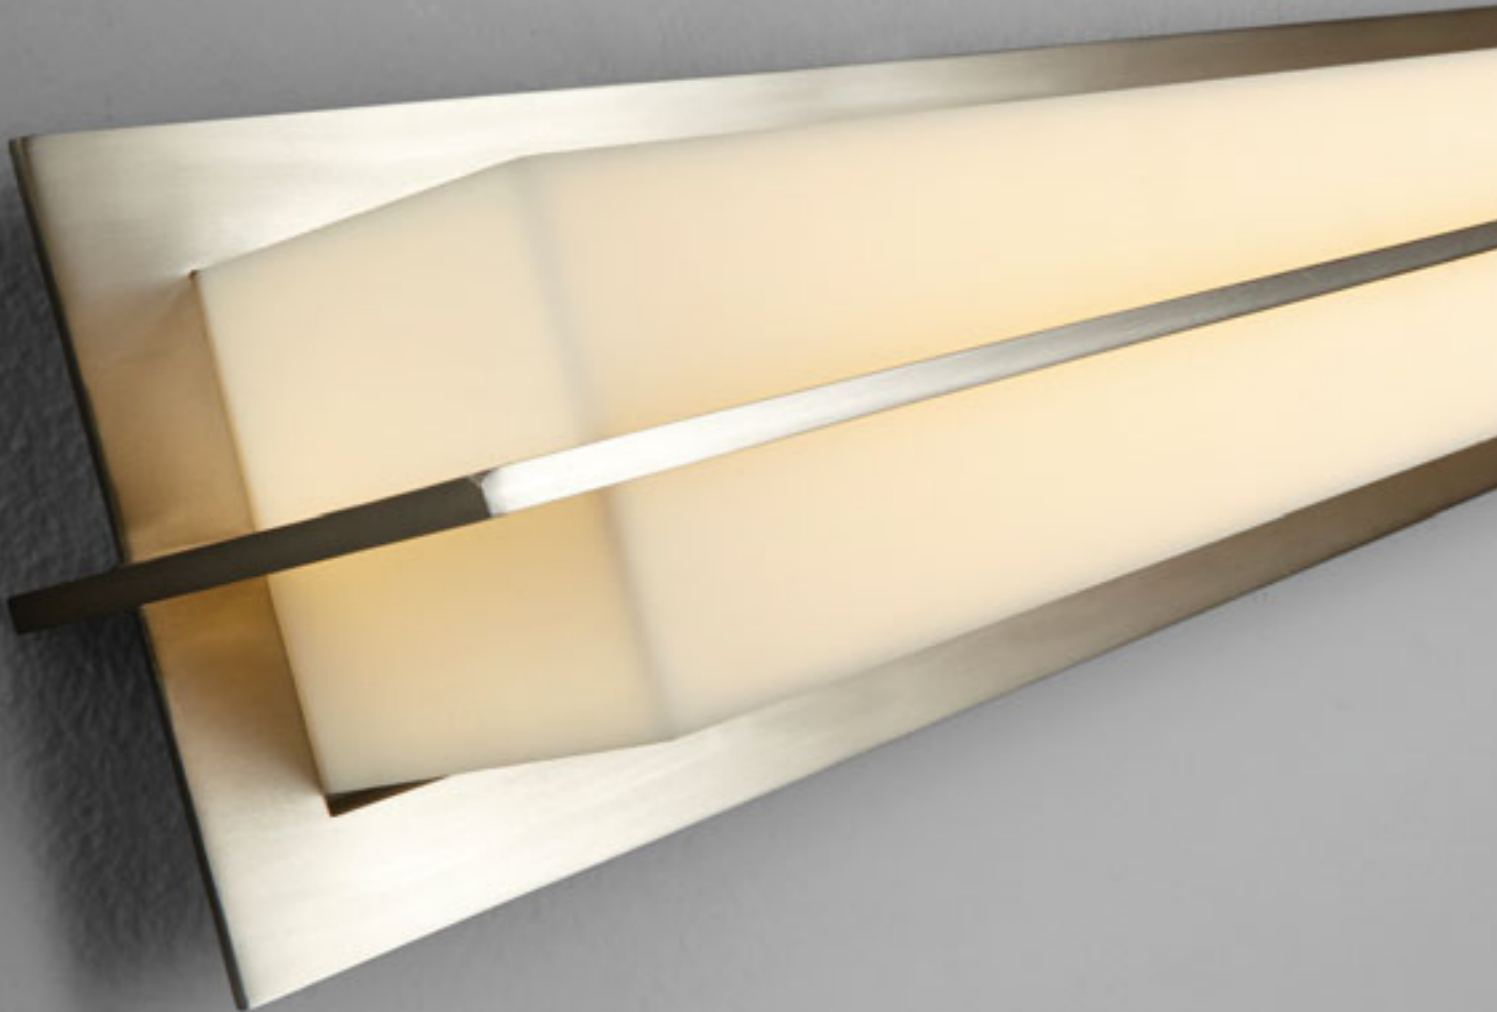

3-542-24

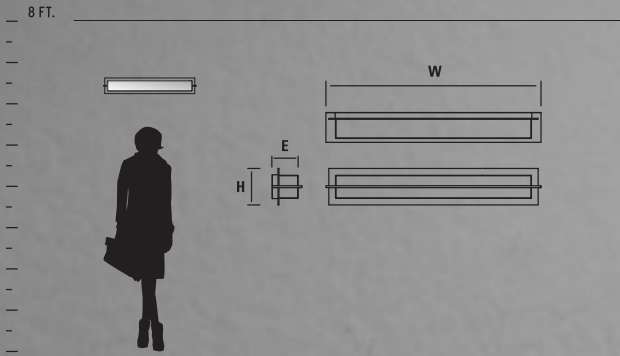







3-542-20



3-542-20

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|---------------------------------|---|---------------------------------|---|
| 3-542-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 28"(w) x 4.75"(h) x 3.875"(ext) | 1 x 11.9w, 90CRI 3000k LED 1083 Delivered Lumens | 120/277V 0-10V/Phase dimming |     |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com




GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to 2"x3" junction box, 4" octagonal junction box, or deep 4"x4" square junction box w/ a single device mud ring. • Approved for vertical or horizontal mounting. • Approved for wall or ceiling mount applications • Total luminaire power 14.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ORION VANITY

ADA

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|-----------------------------|---|----------------------------------|---|
| 3-543-XX | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 27"(w) x 3"(h) x 2.75"(ext) | 1 x 11.6w, 90CRI 3000k LED 1233 Delivered Lumens | 120V/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel housing. • 1/8" thick matte white acrylic. • Unit mounts to deep 4"x4" square junction box w/ single device mud ring. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 14.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.



3-543-14



3-543-24

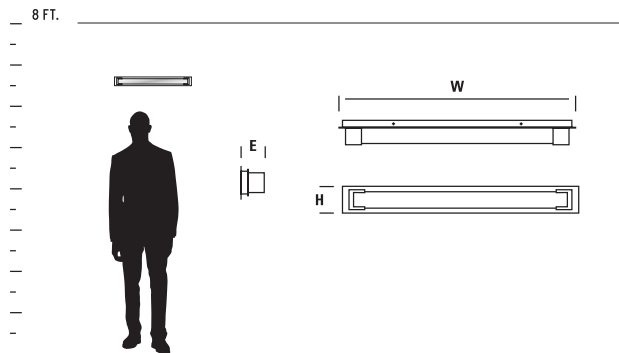


PEBBLE VANITY

ADA

INCANDESCENT



2-5121-124

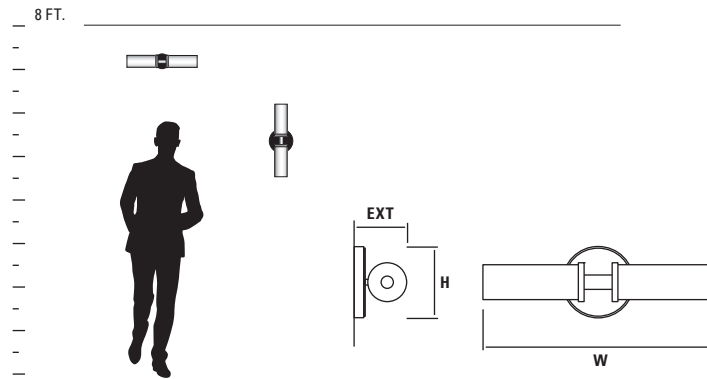

2-5121-114

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|------------|--------------------|---------------------------------------|-------------------------------|---|---------------|
| 2-5121-1XX | 1 White Opal Glass | 14 Polished Chrome 24 Satin Nickel | 20.5"(w) x 4.25"(h) x 4"(ext) | 2 x 60w T10 120V incandescent (medium base) | |

GENERAL SPECIFICATIONS:

- Cast and machined steel fittings. • Diffusers thread onto housing with integral threaded fitting. • Diffusers are 1/4" thick white opal duplex glass. • Unit mounts to 4" octagonal junction box. • Approved for wall mount application only. • Approved for vertical or horizontal mounting. • Open ends. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.


PLATO VANITY

ADA

LED



3-534-24

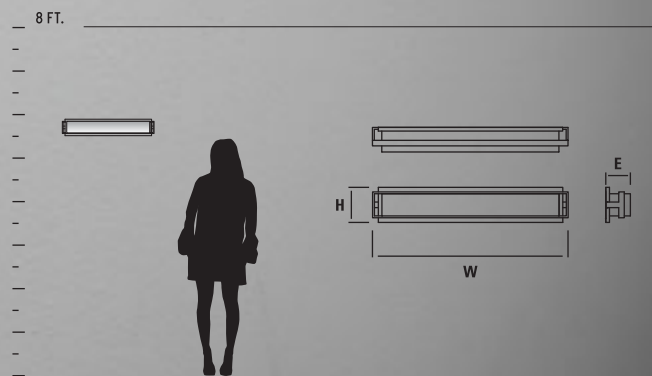

3-534-20

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|-----------------------------------|---|---------------------------------|---------------|
| 3-534-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 26.5"(w) x 4.75"(h) x 3.375"(ext) | 1 x 11.6w, 90CRI 3000k LED 1057 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to deep 4" octagonal junction box or a deep 4"x4" square junction box w/ single device mud ring.
- Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Backplate includes additional mounting holes to mount directly to structure. • Driver mounts inside junction box. • Total luminaire power 14.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


SKYLINE VANITY

ADA

FLOURESCENT



2-5131-24

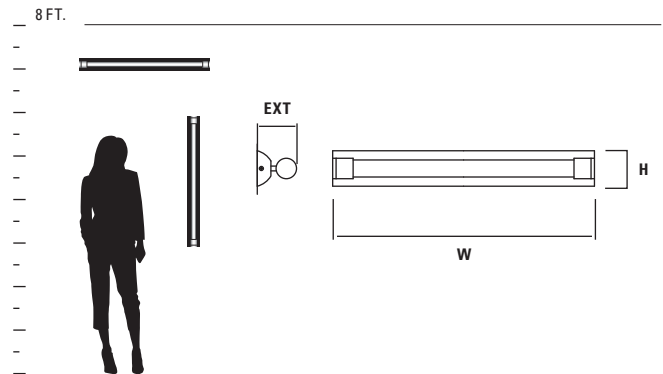

2-5132-14

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | CERTIFICATION |
|----------------------------|---------------------|---------------------------------------|-----------------------------|---|---|---------------|
| 2-5131-XX small | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 24"(w) x 3.25"(h) x 4"(ext) | 1 x 14w T5 fluorescent (mini bi-pin) | Electronic, HPF, Programmed Start, Universal Voltage (120V - 277V) | |
| 2-5132-14 medium | Matte White Acrylic | 14 Polished Chrome | 36"(w) x 3.25"(h) x 4"(ext) | 1 x 21w T5 fluorescent (mini bi-pin) | Electronic, HPF, Programmed Start, Universal Voltage (120V - 277V) | |

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Cast steel end caps. • Acrylic diffusers are extruded, 1/8" thick matte white acrylic. • Unit mounts to 2"x3" junction box, with additional holes for mounting direct to structure. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Allow 6" to either end of fixture to facilitate mounting of back plate. • Toolless access to lamp. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

TEMPUS VANITY

ADA


LED



3-5002-24



3-5001-20

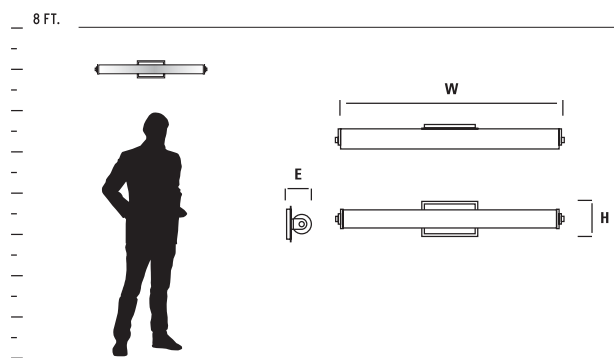

3-5003-15

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------|---------------------|---|----------------------------------|---|--------------------|--------------------|
| 3-5001-XX small | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 18.875"(w) x 5.375"(h) x 4"(ext) | 1 x 13w, 90CRI 3000k LED 1049 Delivered Lumens | 120V Triac dimming | ADA ETL damp |
| 3-5002-XX medium | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 24.5"(w) x 5.375"(h) x 4"(ext) | 2 x 9w, 90CRI 3000k LED 1572 Delivered Lumens | 120V Triac dimming | ADA ETL damp |
| 3-5003-XX large | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 35.5"(w) x 5.375"(h) x 4"(ext) | 2 x 13w, 90CRI 3000k LED 2376 Delivered Lumens | 120V Triac dimming | ADA ETL damp |


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Cast steel end caps. • 1/8" thick matte white acrylic. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power for 3-5001-XX is 15.5w, 3-5002-XX is 23w & 3-5003-XX is 32.9w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

VEGA VANITY

ADA

LED

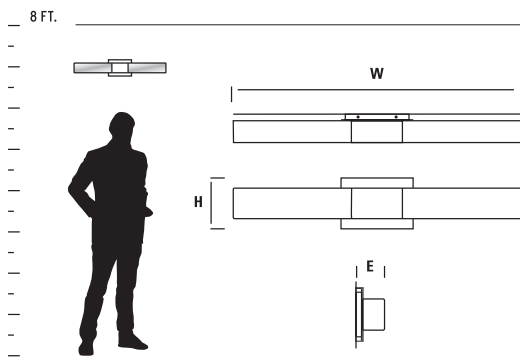

3-569-20



3-569-24



3-569-20

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|---------------------------------|---|---------------------------------|----------------------------|
| 3-569-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 27"(w) x 4.75"(h) x 2.625"(ext) | 2 x 12.2w, 90CRI 3000k LED 2148 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT C UL US damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • 1/8" thick matte white acrylic. • Unit mounts to 4" octagonal junction box or 4"x4" square junction box w/ single device mud ring • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Total luminaire power 30.5w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


WAVE VANITY

ADA

LED

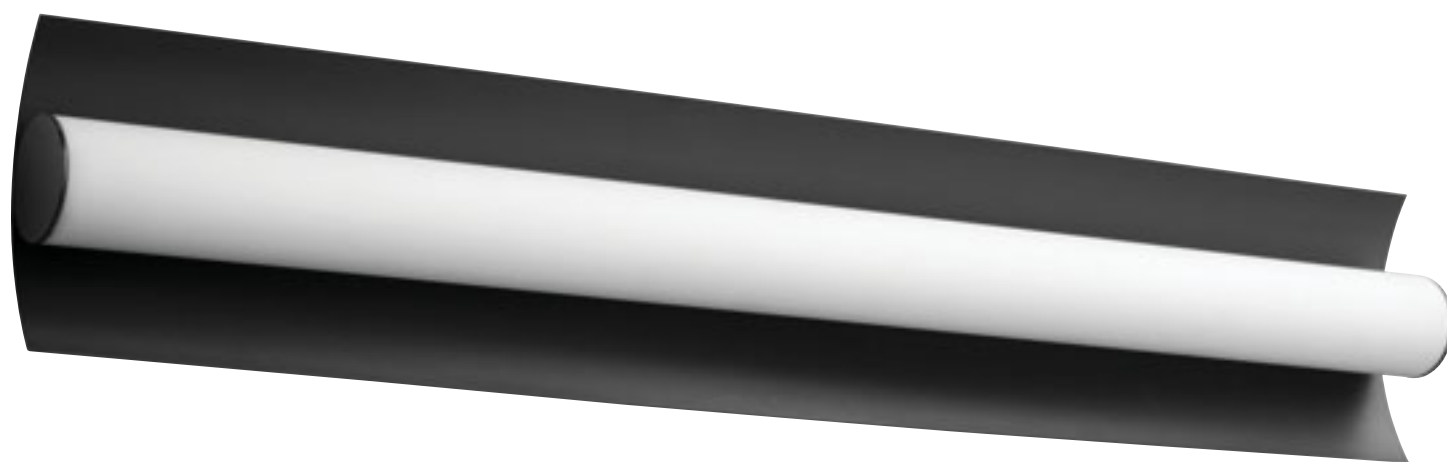

3-5023-15

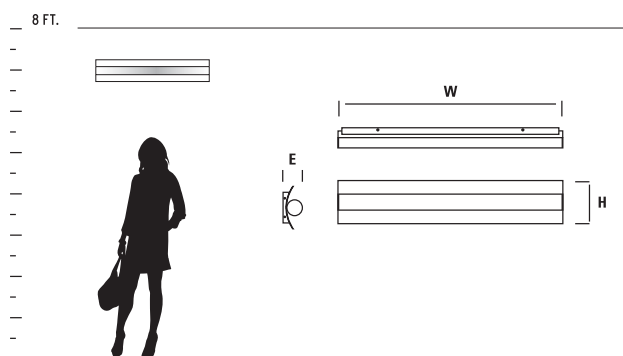

3-5021-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------|---------------------|-----------------------------|---------------------------------|---|--------------------|-----------------------------|
| 3-5021-XX small | Matte White Acrylic | 15 Black 24 Satin Nickel | 17.625"(w) x 6.25"(h) x 3"(ext) | 1 x 13w, 90CRI 3000k LED 930 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT, ETL US, damp |
| 3-5022-XX medium | Matte White Acrylic | 15 Black 24 Satin Nickel | 23.25"(w) x 6.25"(h) x 3"(ext) | 2 x 9w, 90CRI 3000k LED 1353 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT, ETL US, damp |
| 3-5023-XX large | Matte White Acrylic | 15 Black 24 Satin Nickel | 34.25"(w) x 6.25"(h) x 3"(ext) | 2 x 13w, 90CRI 3000k LED 1955 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT, ETL US, damp |


GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Cast steel end caps. • 1/8" thick matte white acrylic. • Unit mounts deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power for 3-5021 is 15.5w, 3-5022 is 23w & 3-5023 is 32.9w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ZENITH II VANITY

ADA

LED

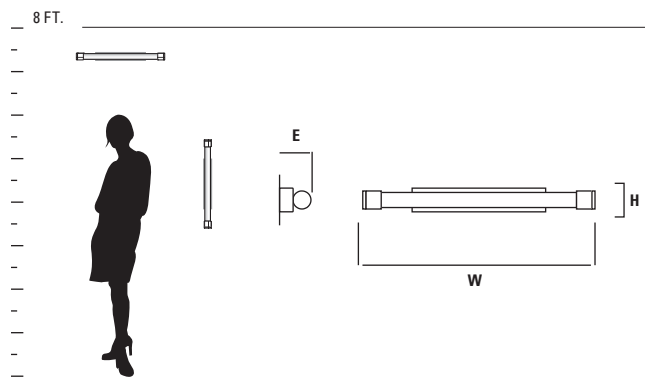

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------------|---|----------------------------------|---|---------------------------------|----------------------------|
| 3-557-XX small | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 24.25"(w) x 2.5"(h) x 3.25"(ext) | 1 x 11.6w, 90CRI 3000k LED 969 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL US damp |
| 3-559-XX large | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 47.75"(w) x 2.5"(h) x 3.25"(ext) | 2 x 11.6w, 90CRI 3000k LED 2223 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL US damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to 2"x3" junction box or 4"x4" square junction box w/ a single device mud ring.
- Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Total luminaire power 14.1w for 3-557-XX and 28w for 3-559-XX.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


ZORA VANITY

ADA

LED



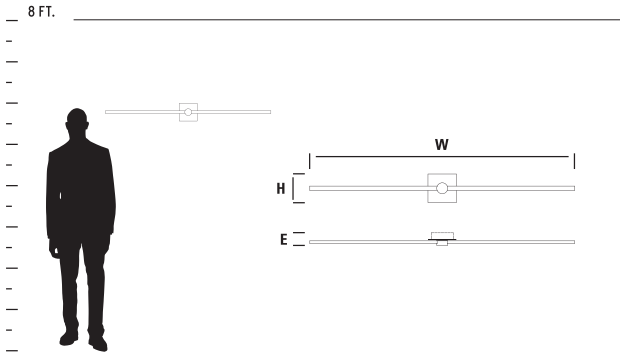

3-53-1550



3-54-1550



3-54-1550

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|---------------------|---|------------------------------------|-------------------------------|--------------------|---|
| 3-53-XXXX small | Matte White Acrylic | 650 White/Industrial Brass 1550 Black/Industrial Brass | 21.125"(w) x 5.25"(h) x 2.25"(ext) | 1 x 12.5w, 90CRI 3000k LED | 120V Triac dimming |  |
| 3-54-XXXX large | Matte White Acrylic | 650 White/Industrial Brass 1550 Black/Industrial Brass | 32"(w) x 5.25"(h) x 2.25"(ext) | 1 x 18w, 90CRI 3000k LED | 120V Triac dimming |  |

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Matte white acrylic diffusers. • Unit mounts deep 4" octagonal junction box or deep 4"x4" octagonal junction box. • Approved for vertical or horizontal mounting. • Approved for wall mount application only. • Fixture can swivel/rotate 45 degrees. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire power and lumen information. • Oxygen reserves the right to modify designs at any time.





sconces




ALCOR SCONCE

ADA

LED

8 FT.

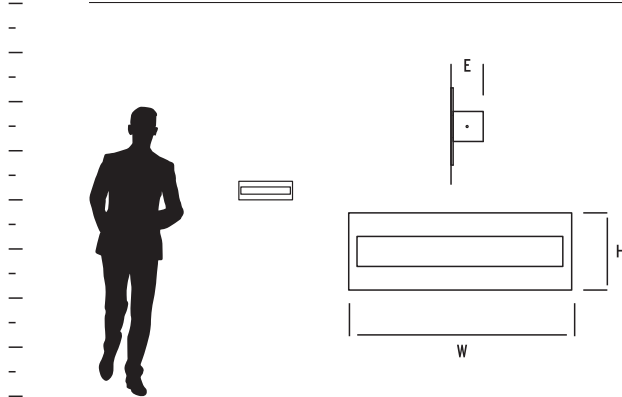

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------------|---|----------------------------|--|---------------------------------|---------------|
| 3-532-XX | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 13"(w) x 4.5"(h) x 2"(ext) | 1 x 11.9w, 90CRI 3000k LED 388 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4"x4" junction box or a deep 4"x4" junction box w/ single device mud ring.
- Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 15.2w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


APOLLO SCONCE

ADA

LED



3-570-24

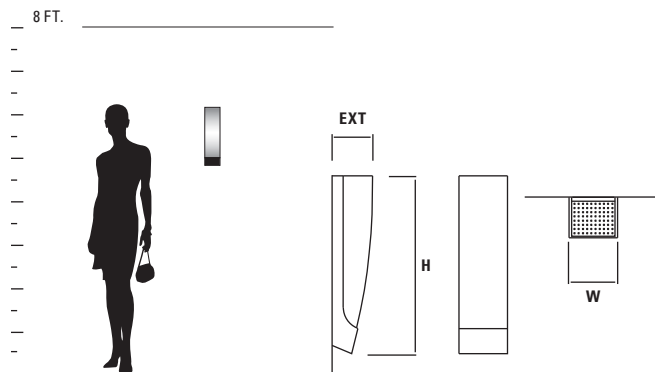

3-570-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|----------|---------------------|-----------------|-------------------------------|--|---------|------------------------------------|---------------|
| 3-570-24 | Matte White Acrylic | 24 Satin Nickel | 4.5"(w) x 16"(h) x 3.75"(ext) | 1 x 10.1w, 90CRI 3000k LED 809 Delivered Lumens | -- | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Perforated metal top lens. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to 4" octagonal junction box. • Approved for wall mount application only.
- Total luminaire power 13.1w for LED model. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


AURORA SCONCE


ADA

LED



3-551-15

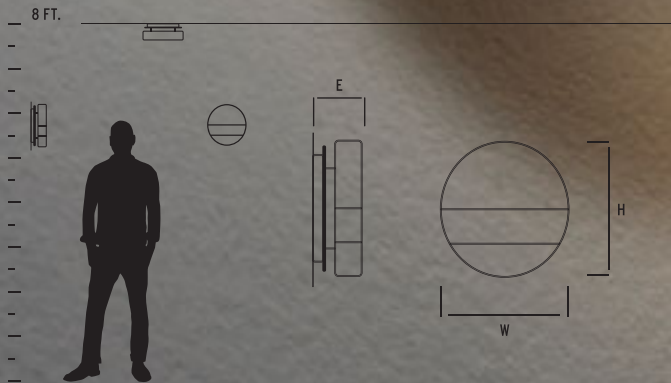

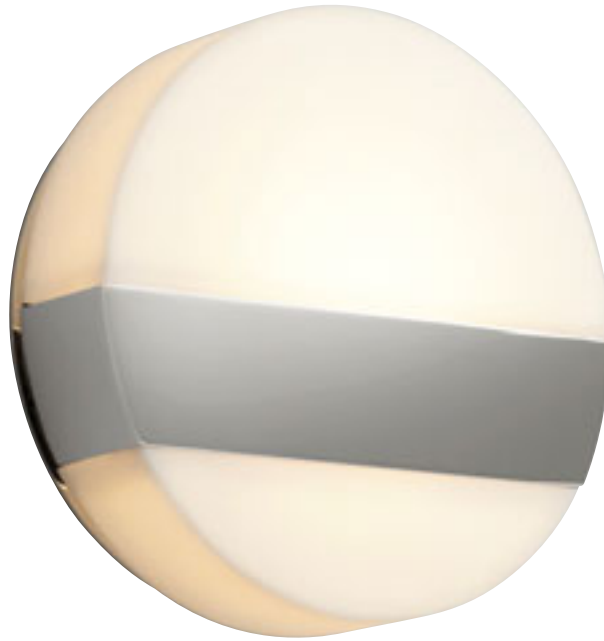




3-551-20



3-551-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|-----------------------------|--|----------------------------------|---|
| 3-551-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 6"(w) x 6"(h) x 2.375"(ext) | 1 x 10.1w, 90CRI 3000k LED 454 Delivered Lumens | 120V/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com




GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ a single device mud ring. • Approved for wall or ceiling mount applications. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

BEACON SCONCE

ADA

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---|---------------------------------|----------------------------|--|------------------------------------|---|
| 3-587-XXX | 1 White Cotton 2 Matte White Acrylic | 24 Satin Nickel 95 Old World | 7"(w) x 16.5"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 441 Delivered Lumens | 120/277V 0-10V/Phase dimming |    |


2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim.
- Clear, polished resin accent.
- Fabric shade is white cotton.
- Acrylic shade is 1/8", matte white finish.
- White acrylic top and bottom lenses.
- Unit mounts to 4" octagonal junction box.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Total luminaire power 12.4w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



3-587-295

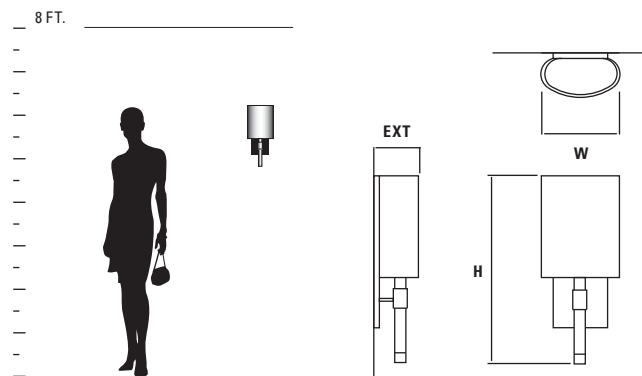


3-587-224

BOLO SCONCE

ADA

LED

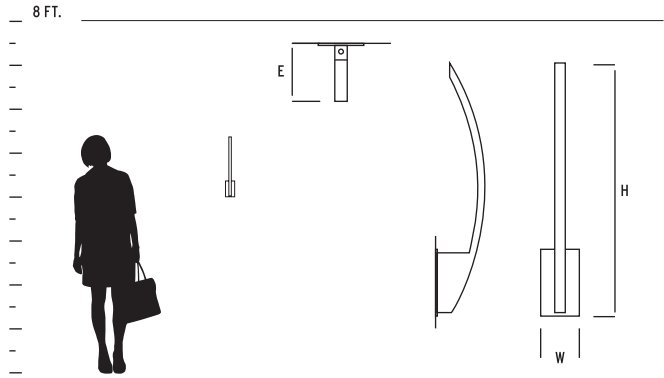

3-553-15



3-553-40



3-553-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|--|--|--|----------------------------------|---------------|
| 3-553-XX | Matte White Acrylic | 15 Black 24 Satin Nickel 40 Aged Brass | 2.75"(w) x 18.5"(h) x 3.5"(ext) w/o small cover plate | 1 x 12.1w, 90CRI 3000k LED 600 Delivered Lumens | 120V/277V 0-10V/Phase dimming | |




GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4"x4" square junction box w/ single device mud ring for small backplate.
- Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring for large backplate. • Supplied with two cover plate options: 4.75" x 6" for octagonal mounting & 2.75" x 4.75" for mounting to single device mud ring. • Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 14.5w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

CHAMELEON SCONCE

ADA


LED


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|-----------------------------|--|----------------------------------|---|
| 3-521-XX | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 8"(w) x 11.75"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 552 Delivered Lumens | 120/277V 0-10V/Phase dimming. |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing.
- Frost resin accent.
- Matte white acrylic lenses and shades are 1/8" thick.
- Unit mounts to deep 4" octagonal junction box.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

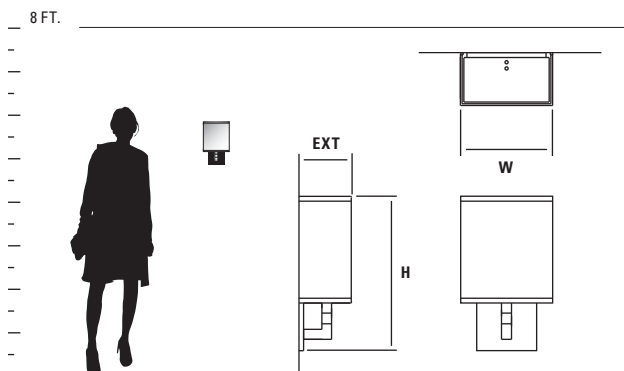

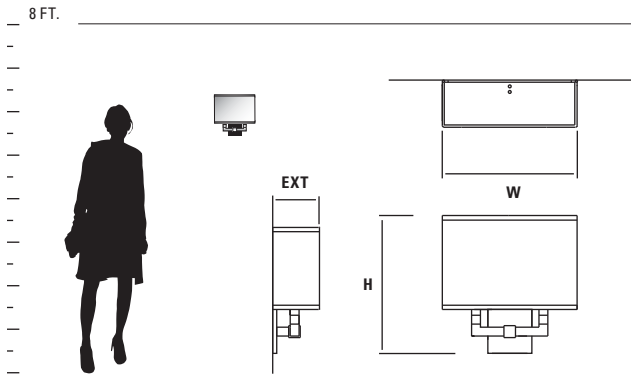

3-514-22



3-514-40

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|--------------------------------|--|----------------------------------|---------------|
| 3-514-XX | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 11.5"(w) x 11.25"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 832 Delivered Lumens | 120/277V 0-10V/Phase dimming. | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Frost resin accent. • Matte white acrylic lenses and shades are 1/8" thick. • Unit mounts to 4" octagonal junction box. • Unit requires 2.5" deep junction box.
- Driver mounts inside junction box. • Total luminaire power 13.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

CRESCENT SCONCE

ADA

LED



3-512-24

8 FT.



3-513-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------------|-----------------|----------------------------------|--|---------------------------------|-------------------|
| 3-512-24 small | Matte White Acrylic | 24 Satin Nickel | 3.5"(w) x 14"(h) x 3.75"(ext) | 1 x 10.1w, 90CRI 3000k LED 882 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA cULus damp |
| 3-513-24 large | Matte White Acrylic | 24 Satin Nickel | 3.5"(w) x 18.75"(h) x 3.75"(ext) | 1 x 10.1w, 90CRI 3000k LED 988 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Diffusers are 1/8" thick matte white acrylic. • Units mount to deep 4"x4" junction box w/ single device mud ring. • Approved for vertical mounting. • Approved for wall mount applications only. • Driver mounts inside junction box for 3-512-XX. • Total luminaire power 12.9w for 3-512-24 and 12.8w for 3-513-24. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

DUO SCONCE

ADA

LED

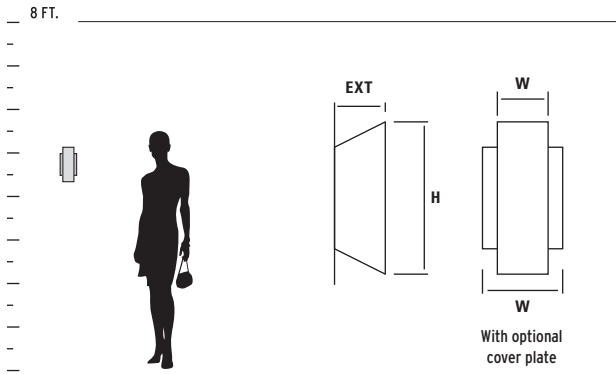

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|----------|------------------|---|--|---|---------------|
| 3-509-XX | Perforated Metal | 18 Gunmetal 24 Satin Nickel 40 Aged Brass | 3"(w) x 9.25"(h) x 3"(ext) w/o optional cover plate | 2 x 7w MAX GU10 120V LED ONLY (lamps not included) | |

GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Perforated metal diffusers. • Unit mounts to 2"x3" junction box. • Supplied with 4.75"x6" cover plate for mounting to 4" octagonal junction box. • Approved for vertical mounting. • Approved for wall mount applications only. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ELLIPSE SCONCE


ADA

LED







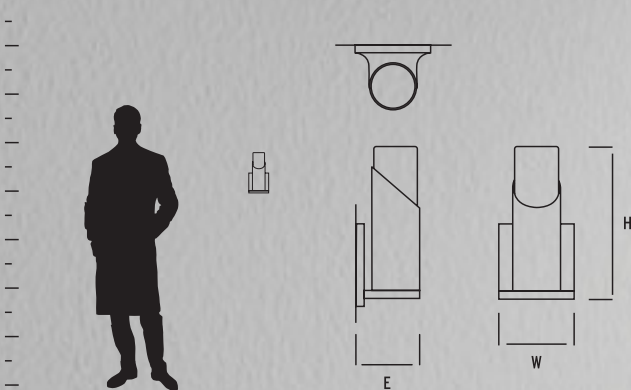

3-567-220

8 FT.





| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|------------------------------|---|--------------------------------|---|----------------------------------|---|
| 3-567-1XX | 1 White Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 4.75"(w) x 9.625"(h) x 4"(ext) | 1 x 6.2w, 90CRI 3000k LED 132 Delivered Lumens | 120V/277V 0-10V/Phase dimming |    |
| 3-567-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 4.75"(w) x 9.625"(h) x 4"(ext) | 1 x 6.2w, 90CRI 3000k LED 157 Delivered Lumens | 120V/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic and glass shades are 1/8", matte white finish. • Unit mounts to deep 4" octagonal junction box, deep 4"x4" square junction box or a deep 4"x4" square junction box w/ single device mud ring. • Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box.
- Total luminaire power 7.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EPOCH SCONCE

ADA

LED

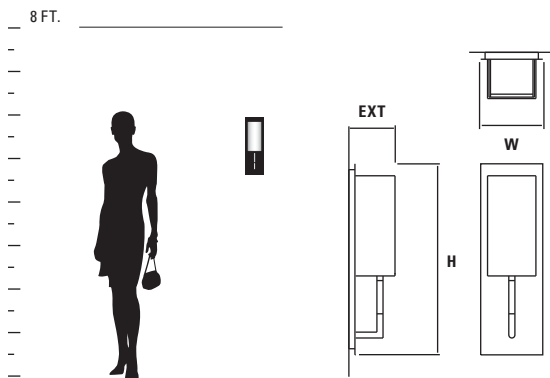

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|------------------|---|---|-----------------------------------|--|---------|-------------------------------------|---------------|
| 3-564-XXX | 1 White Cotton 2 Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 5.25"(w) x 15.75"(h) x 3.75"(ext) | 1 x 10.1w, 90CRI 3000k LED 766 Delivered Lumens | - | 120/277V 0-10V/Phase dimming. | |

2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel backplate. • Steel tubing with frost resin accent. • Fabric shade is white cotton. • Acrylic shade is 1/8", matte white finish. • White acrylic top and bottom lenses.
- Mount to deep 4" octagonal junction box or a deep 4"x4" square junction box w/ single device mud ring. • Require 2.5" deep junction box. • Driver mounts inside junction box.
- Total luminaire power 13.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

FUGIT SCONCE

ADA

LED

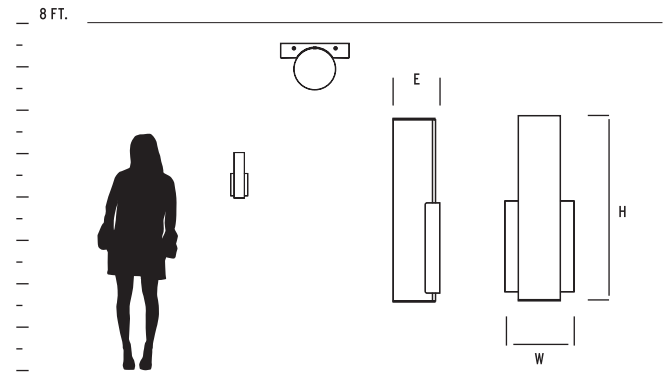

3-5010-40



3-5010-24



3-5010-15

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|--|------------------------------------|---|--------------------|---------------|
| 3-5010-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel 40 Aged Brass | 4.5"(w) x 12.125"(h) x 3.125"(ext) | 1 x 9w, 90CRI 3000k LED 689 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 11.3w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.


HALO SCONCE

ADA

LED



3-515-25

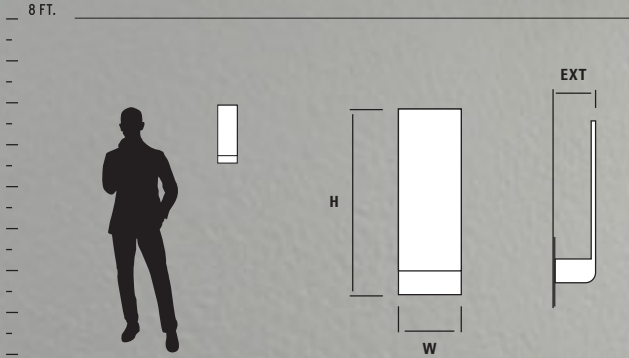



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------------|---|-----------------------------------|--|---------------------------------|--------------------------|
| 3-535-XX small | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 5.5"(w) x 12.625"(h) x 3.25"(ext) | 1 x 10.1w, 90CRI 3000k LED 709 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLY cULus damp |
| 3-515-XX large | Matte White Acrylic | 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 5.5"(w) x 18"(h) x 3.25"(ext) | 1 x 10.1w, 90CRI 3000k LED 642 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLY cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Matte white acrylic diffuser. • Unit mounts to horizontal 2"x3" junction box or a 4"x4" junction box. • Approved for vertical mounting. • Approved for wall mount applications only. • Total luminaire power 13w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


ICON SCONCE

ADA

LED



3-511-24
shown with optional cover plate (Included)

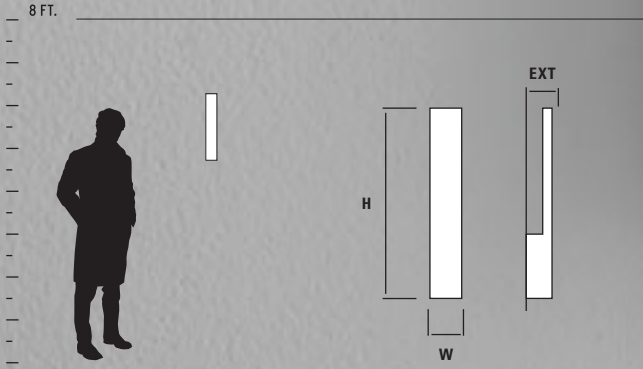







3-511-14



3-511-40



3-511-22

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|---|--|---------------------------------|---|
| 3-511-XX | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 3.25"(w) x 19.5"(h) x 2.5"(ext) w/o optional cover plate | 1 x 10.1w, 90CRI 3000k LED 689 Delivered Lumens | 120/277V 0-10V/Phase dimming |     |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Matte white acrylic diffuser. • Unit mounts to 2"x3" junction box or deep 4"x4" square junction box w/ single device mud ring.. • Supplied with 4.75"x6" cover plate for mounting to 4" octagonal junction box. • Approved for vertical mounting. • Approved for wall mount applications only. • Total luminaire power 12.8w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.





KIKO SCONCE

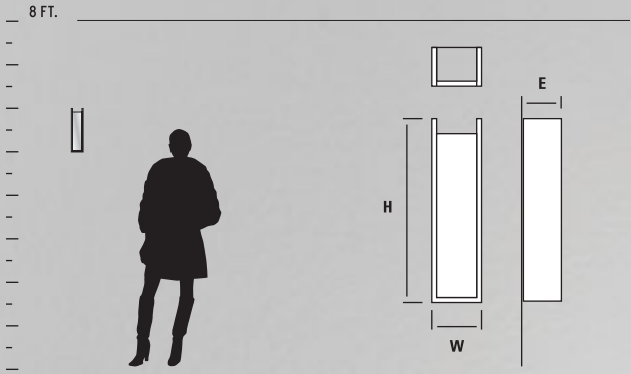ADA

LED



3-545-20

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|--------------------|-------------------------------|--|---------------------------------|---|
| 3-545-20 | Matte White Acrylic | 20 Polished Nickel | 3.25"(w) x 12"(h) x 2.5"(ext) | 1 x 10.1w, 90CRI 3000k LED 494 Delivered Lumens | 120/277V 0-10V/Phase dimming |     |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to a deep 4"x4" junction box w/ single device mud ring.
- Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 12.8w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

MAGNETA SCONCE

ADA LED

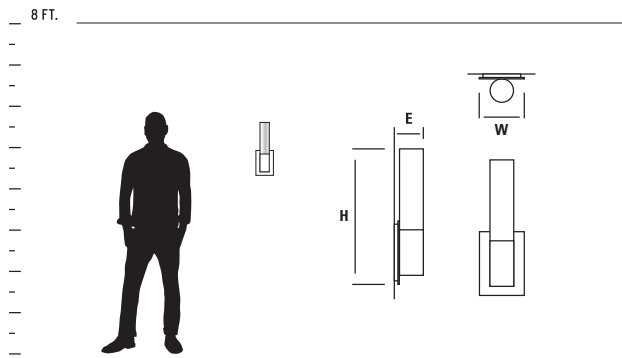

3-528-140



3-528-24



3-528-124

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|----------------------------------|------------------------------------|--|---------------------------------|--------------------------|
| 3-528-XX | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 4.75"(w) x 14.375"(h) x 3.25"(ext) | 1 x 11.9w, 90CRI 3000k LED 735 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus damp |
| 3-528-1XX | 1 Matte Opal Glass | 24 Satin Nickel 40 Aged Brass | 4.75"(w) x 14.375"(h) x 3.25"(ext) | 1 x 11.9w, 90CRI 3000k LED 690 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Closed top diffuser is 1/8" thick matte white acrylic or matte opal glass. • Diffuser screws onto housing with integral threaded fitting. • Unit mounts to 2"x3" junction box or a 4" octagonal junction box. • Approved for wall mount application only. • Total luminaire power 15.2w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

MAGNUM SCONCE

ADA


LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|---------------------|---|--------------------------------|---|---------------------------------|----------------------------|
| 3-518-XX | Matte White Acrylic | 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 4.75"(w) x 18.75"(h) x 4"(ext) | 1 x 11.9w, 90CRI 3000k LED 1077 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL US damp |
| 3-518-1XX | 1 Matte Opal Glass | 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 4.75"(w) x 18.75"(h) x 4"(ext) | 1 x 11.9w, 90CRI 3000k LED 1164 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL US damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold-rolled steel housing.
- Closed top diffuser is 1/8" thick matte white acrylic or matte opal glass.
- Diffuser screws onto housing with integral threaded fitting.
- Unit mounts to 2"x3" junction box or a 4" octagonal junction box
- Approved for wall mount application only.
- Total luminaire power 15.1w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

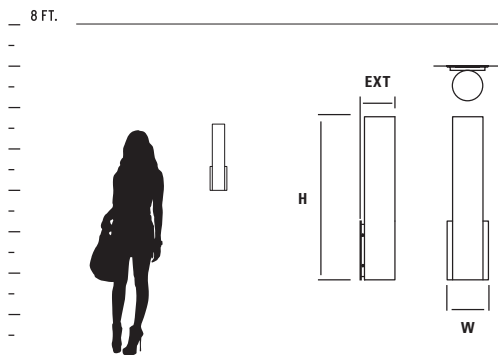

METRIX SCONCE

ADA

LED

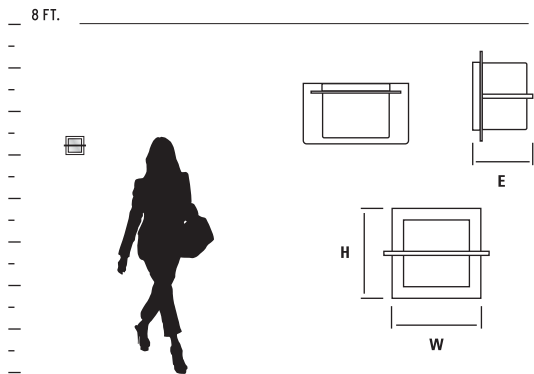

3-541-20



3-541-20



3-541-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|-----------------------------------|--|---------------------------------|--------------------------|
| 3-541-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 5.75"(w) x 5.75"(h) x 3.875"(ext) | 1 x 10.1w, 90CRI 3000k LED 701 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing.
- Diffuser is 1/8" thick matte white acrylic.
- Unit mounts to a deep 4" octagonal junction box or deep 4" square junction box with a single device mud ring.
- Unit requires deep 2.5" deep junction box.
- Driver mounts inside junction box.
- Approved for wall and ceiling mount applications.
- Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.


MIES SCONCE

ADA

LED



3-520-14

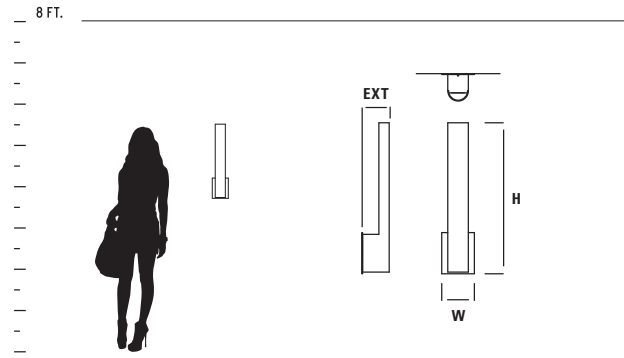

3-520-40

shown with optional cover plate (included)

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|-------------------------------------|---|--|---------------------------------|---------------|
| 3-520-XX | Matte White Acrylic | 14 Polished Chrome 40 Aged Brass | 3"(w) x 21.75"(h) x 4"(ext) w/o optional cover plate | 1 x 10.1w, 90CRI 3000k LED 730 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Matte white acrylic diffuser. • Unit mounts to 2"x3" junction box. • Supplied with 4.75"x6" cover plate for mounting to 4" octagonal junction box.
- Approved for vertical mounting. • Approved for wall mount applications only. • Total luminaire power 12.7w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

MIRAGE SCONCE

ADA

LED

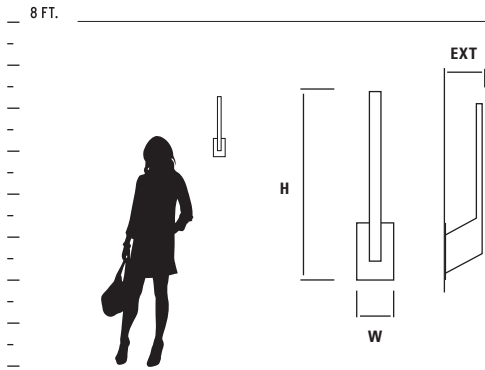

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------------|----------------------------------|---------------------------------|--|---------------------------------|---------------|
| 3-516-XX | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 4.75"(w) x 19.125"(h) x 4"(ext) | 1 x 12.2w, 90CRI 3000k LED 764 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Matte white acrylic diffuser. • Unit mounts to 2"x3" or 4" octagonal junction box. • Approved for vertical mounting. • Approved for wall mount applications only.
- Total luminaire power 15w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

NERO SCONCE

LED



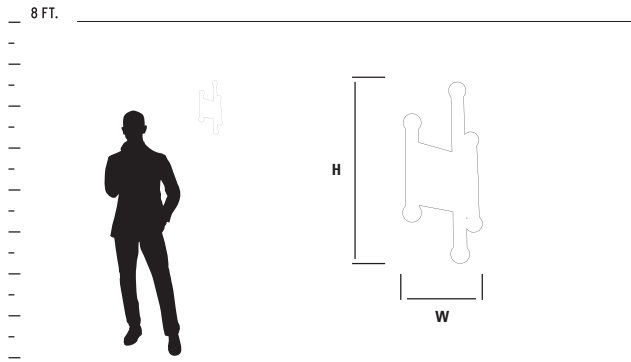

3-584-1540

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------------|-----------------|------------------------------|---------------------------------|---|--------------------|---------------|
| 3-584-1540 | Frosted Acrylic | 1540 Black/Aged Brass | 7.25"(w) x 14.125"(h) x 4"(ext) | 6 x 2.1w, 90CRI 3000k LED 366 Delivered Lumens | 120V Triac dimming | ETL damp |

GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Frosted acrylic diffusers. • Unit mounts to 4" octagonal junction box. • Approved for vertical mounting. • Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 16.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


OLIO SCONCE

ADA

LED



3-538-22

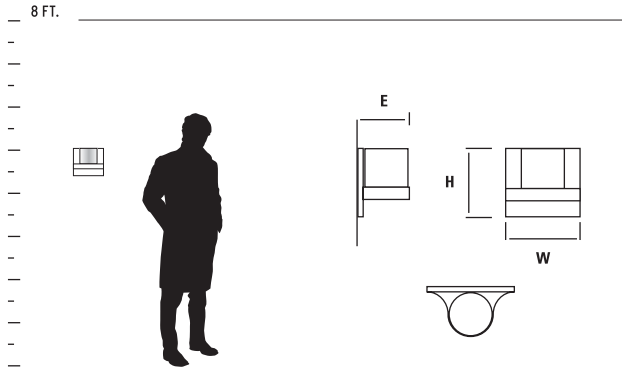

3-538-24




3-538-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|------------------|------------------------------------|---------------------------|--|---------------------------------|---------------|
| 3-538-XX | Matte Opal Glass | 22 Oiled Bronze 24 Satin Nickel | 7"(w) x 5.5"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 302 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte opal glass. • Diffuser screws onto housing with integral threaded fitting. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box. • Approved for wall applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

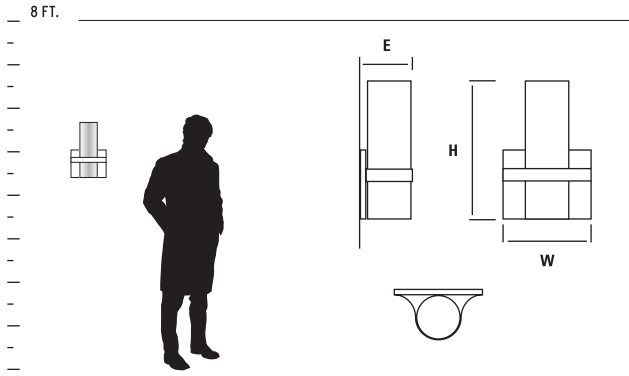

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|------------------|------------------------------------|--------------------------|--|---------------------------------|---------------|
| 3-539-XX | Matte Opal Glass | 22 Oiled Bronze 24 Satin Nickel | 7"(w) x 11"(h) x 4"(ext) | 2 x 10.1w, 90CRI 3000k LED 632 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte opal glass. • Diffuser screws onto housing with integral threaded fitting. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box. • Approved for wall applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 26.2w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ORION SCONCE

ADA

LED

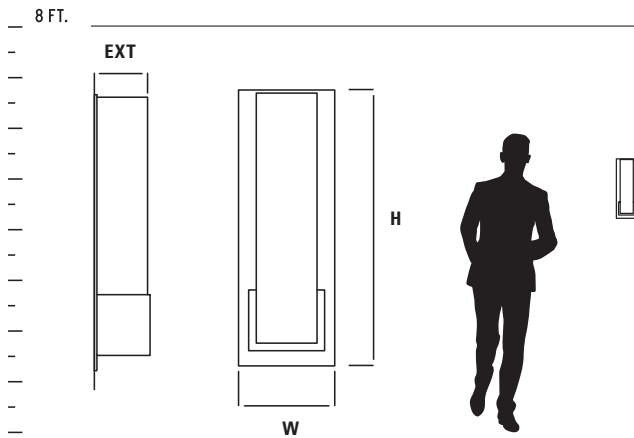


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|--|----------------------------------|--|---------------------------------|---------------|
| 3-540-XX | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel 40 Aged Brass | 4.75"(w) x 13.5"(h) x 2.75"(ext) | 1 x 12.2w, 90CRI 3000k LED 926 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to horizontal or a deep 4"x4" junction box w/ single device mud ring (mud ring must be mounted horizontally).
- Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 15.4w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

PATHWAYS SCONCE

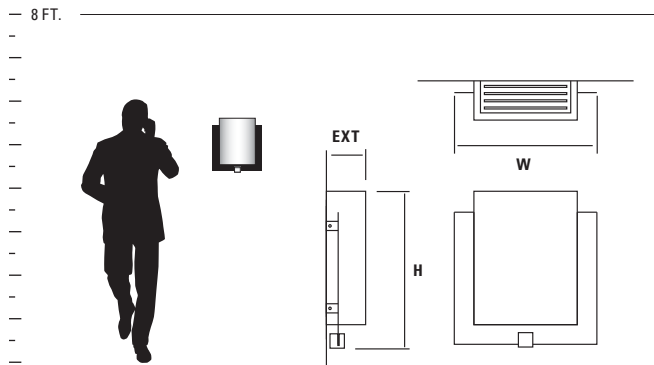

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------|-----------------------|---------------------------------|---------------------------------|--|------------------------------------|---------------|
| 3-523-2XX | 2 Matte White Acrylic | 24 Satin Nickel 95 Old World | 13.75"(w) x 15"(h) x 3.75"(ext) | 1 x 10.1w, 90CRI 3000k LED 836 Delivered Lumens | 120/277V 0-10V/Phase dimming | |
| 3-523-2XX-EM | 2 Matte White Acrylic | 24 Satin Nickel 95 Old World | 13.75"(w) x 15"(h) x 3.75"(ext) | 1 x 10.1w, 90CRI 3000k LED 836 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available for non EM LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel housing and trim. • Acrylic diffusers are 1/8" thick, finish as specified. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications only
- Total luminaire power 12.9w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)

- ETL required 90 minute emergency battery run time • 32 hour recharge time.

PEBBLE SCONCE

FLOURESCENT

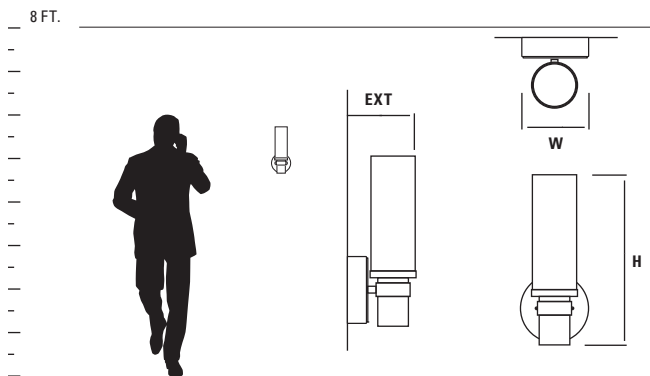


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | CERTIFICATION |
|-------------------|---------------------------|------------------------|-------------------------------|---|---|---------------|
| 2-5156-124 | 1 White Opal Glass | 24 Satin Nickel | 6"(w) x 12.75"(h) x 5.5"(ext) | 1 x 18w quad 4-pin fluorescent (G24q-2) 837 Delivered Lumens | Electronic, HPF, Programmed Start, Universal Voltage (120-277V) | c us |

GENERAL SPECIFICATIONS:

- Cast and machined steel fittings.
- Diffuser screws onto housing with integral threaded fitting.
- Glass diffusers are 1/8" thick white opal duplex glass.
- Open top.
- Units mounts to 4" octagonal junction box.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

POLARIS SCONCE

ADA LED EM

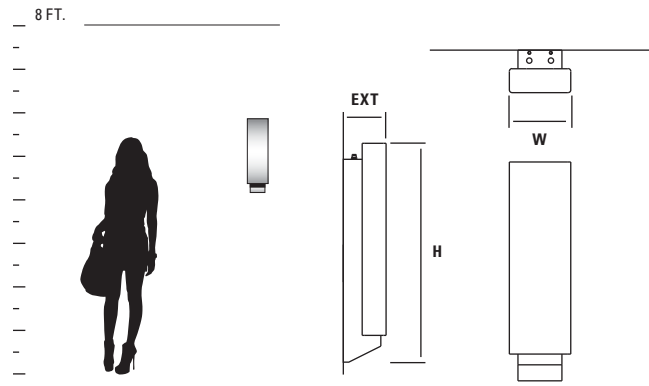

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-------------|---------------------|-----------------|-------------------------------|---|---------------------------------|---------------------------------|
| 3-522-24 | Matte White Acrylic | 24 Satin Nickel | 5.75"(w) x 20.5"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 1043 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT, UL US, damp |
| 3-522-24-EM | Matte White Acrylic | 24 Satin Nickel | 5.75"(w) x 20.5"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 1043 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT, ETL US, damp, EM |

2700k, 3500k, 4000k color temperatures also available for non EM LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Acrylic diffusers are 1/8" thick matte white with closed top and bottom. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications only • Total luminaire power 15.4w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


EMERGENCY BATTERY BACKUP MODELS (EM)

• ETL required 90 minute emergency battery run time • 32 hour recharge time.





PROFILE SCONCE

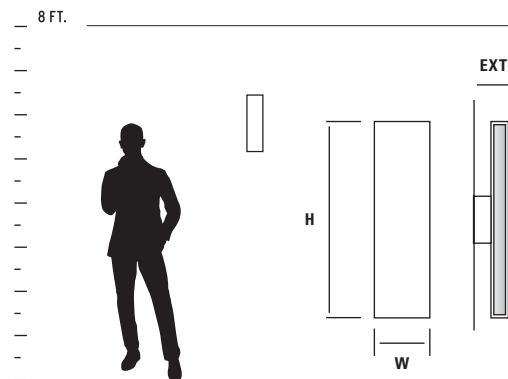ADA

LED



3-517-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|--|--|---------------------------------|---|
| 3-517-XX | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 4.5"(w) x 16"(h) x 3"(ext) w/o optional plate | 2 x 12.2w, 90CRI 3000k LED 360 Delivered Lumens | 120/277V 0-10V/Phase dimming |     |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing and trim. • Matte white acrylic diffuser. • Unit mounts to 2" x 3" junction box. • Supplied with 4.75" x 6" cover plate for mounting to 4" octagonal junction box.
- Approved for vertical mounting. • Approved for wall mount applications only. • Total luminaire power 29.8w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

REFLEX SCONCE

ADA LED

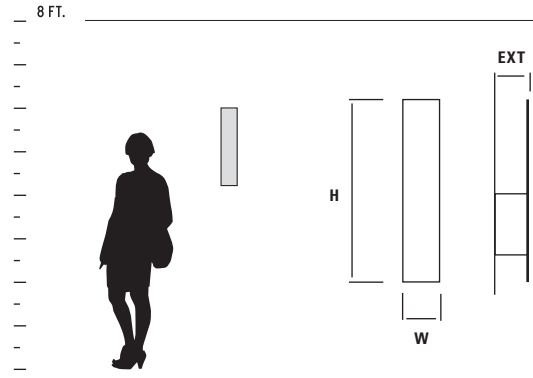

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|-----------------|------------------|---|--|---|---------------|
| 3-504-XX | Perforated Metal | 14 Polished Chrome 15 Black 24 Satin Nickel 25 Satin Copper 40 Aged Brass | 4"(w) x 20"(h) x 3.5"(ext) w/o optional plate | 2 x 7w MAX GU10 120V LED ONLY (lamps not included) | |


GENERAL SPECIFICATIONS:

- Cold rolled steel housing and trim. • Perforated metal diffuser • Unit mounts to 2" x 3" junction box. • Supplied with 4.75" x 6" cover plate for mounting to 4" octagonal junction box.
- Approved for vertical mounting. • Approved for wall mount applications only. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

SIREN SCONCE

ADA

LED

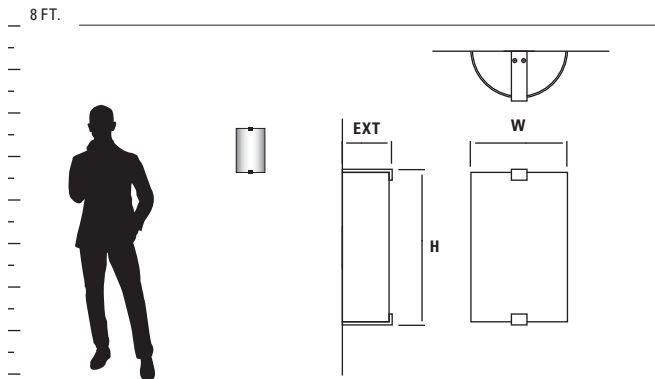

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|------------------------------|---------------------------------------|-------------------------------|---|---------------------------------|-------------------|
| 3-563-1XX | 1 White Opal Glass | 14 Polished Chrome 24 Satin Nickel | 7.75"(w) x 12.5"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 980 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA cULUS damp |
| 3-563-2XX | 2 Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 7.75"(w) x 12.5"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 1066 Delivered Lumens | 120/277V 0-10V/Phase dimming | ADA cULUS damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Cast steel trim. • Glass diffuser is 1/4" thick white opal duplex glass. • Acrylic shades are 1/8" thick. • White acrylic top and bottom lense with acrylic diffuser options. • Perforated steel top and bottom lense with white opal glass option. • Unit mounts to 4" octagonal junction box. • Approved for wall mount application only. • Total luminaire power 13.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


SONGBIRD SCONCE

ADA

LED

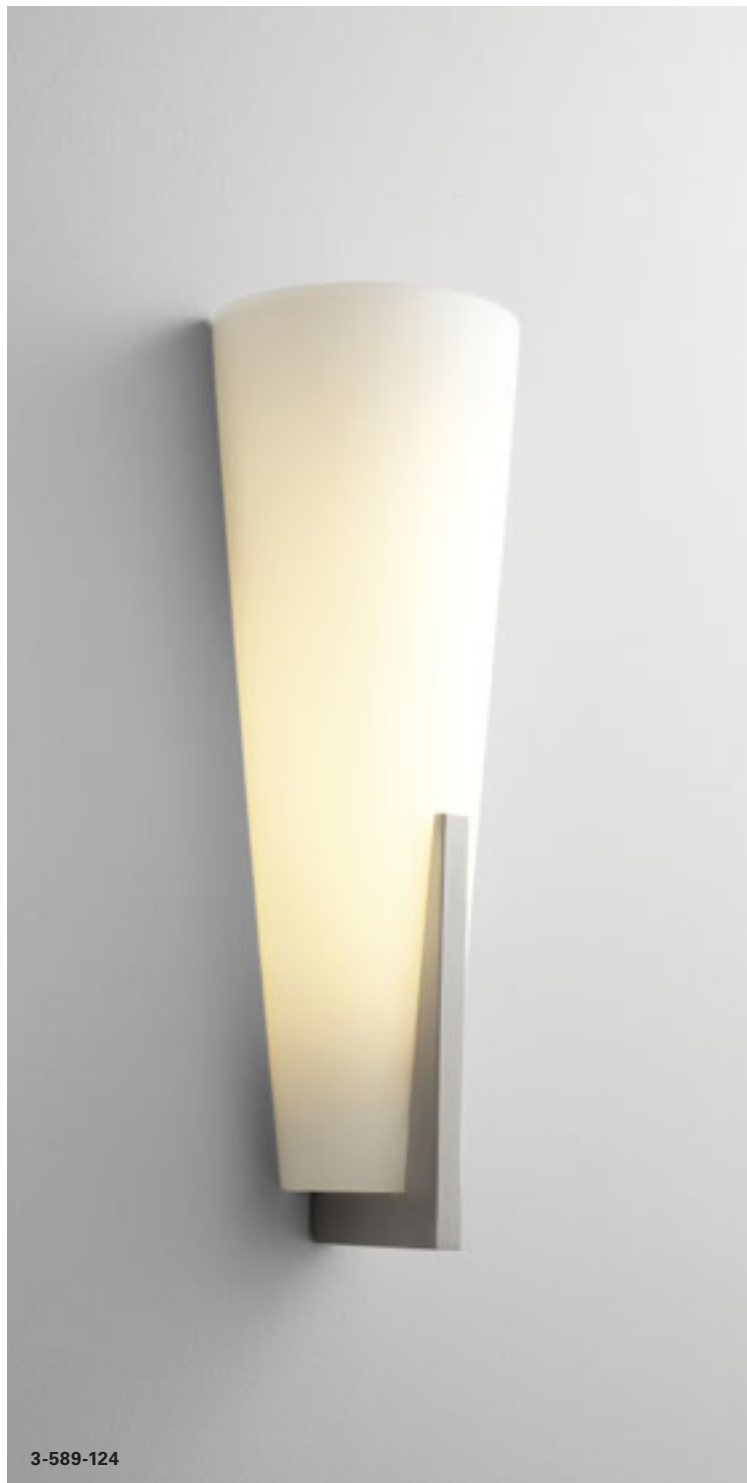

3-589-124

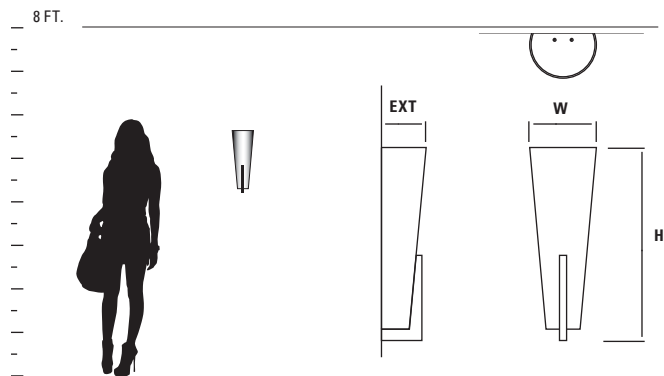

3-589-124

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|--------------------|-----------------|--------------------------|---|---------------------------------|---------------|
| 3-589-124 | 1 Matte Opal Glass | 24 Satin Nickel | 6"(w) x 17"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED 1007 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Cast steel trim. • Top and bottom acrylic diffusers are 1/8" thick, finish as specified. • Glass diffuser is 1/4" thick white opal duplex glass.
- All units mount to vertical 2"x3" or 4" octagonal junction box. • Approved for wall mount application only. • Total luminaire power 13.3w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

TEMPUS SCONCE


ADA

LED



3-5000-24

8 FT.

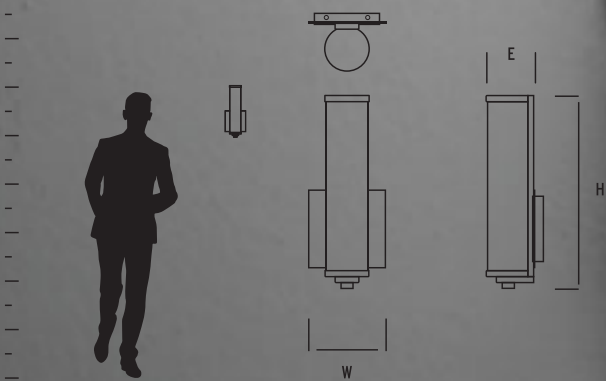






3-5000-15



3-5000-40



3-5000-20


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|--|---------------------------------|---|--------------------|---|
| 3-5000-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel 40 Aged Brass | 5.125"(w) x 12.75"(h) x 4"(ext) | 1 x 9w, 90CRI 3000k LED 687 Delivered Lumens | 120V Triac dimming |    |

GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 11.3w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

UNO SCONCE

ADA LED

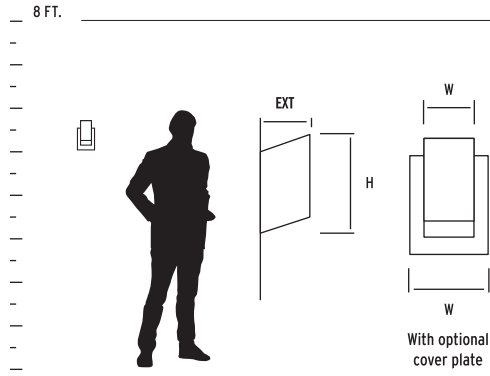

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | CERTIFICATION |
|----------|------------------|------------------------------|--|--|---------------|
| 3-500-XX | Perforated Metal | 18 Gunmetal 40 Aged Brass | 3"(w) x 6.75"(h) x 3"(ext) w/o optional cover plate | 1 x 7w MAX GU10 120V LED ONLY (lamp not included) | |




GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Perforated metal diffuser. • Unit mounts to 2"x3" junction box. • Supplied with 4.75"x6" cover plate for mounting to 4" octagonal junction box. • Approved for vertical mounting. • Approved for wall mount applications only. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

VEGA SCONCE

ADA


LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---------------------------------------|------------------------------------|--|---------------------------------|---|
| 3-519-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel | 4.75"(w) x 15.75"(h) x 2.625"(ext) | 1 x 12.1w, 90CRI 3000k LED 925 Delivered Lumens | 120/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to 2"x3" or 4" octagonal junction box. • Approved for wall mount applications only. • Total luminaire power 14.5w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

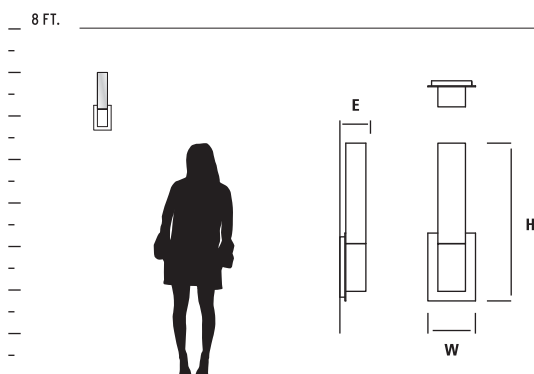




VELA SCONCE

ADA

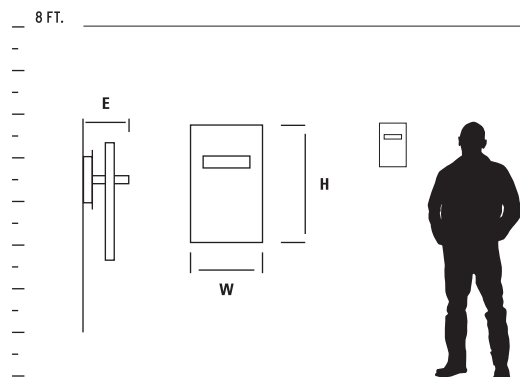LED



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|--|------------------------------|--|---------------------------------|---|
| 3-527-XX | Matte White Acrylic | 20 Polished Nickel 22 Oiled Bronze 24 Satin Nickel | 6.875"(w) x 12"(h) x 4"(ext) | 2 x 10.1w, 90CRI 3000k LED 408 Delivered Lumens | 120/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold-rolled steel housing. • Diffuser is 1/8" thick matte white acrylic. • Unit mounts to deep 4" octagonal junction box. • Approved for wall mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 26.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

WAVE SCONCE

ADA


LED



3-5020-24



3-5020-40

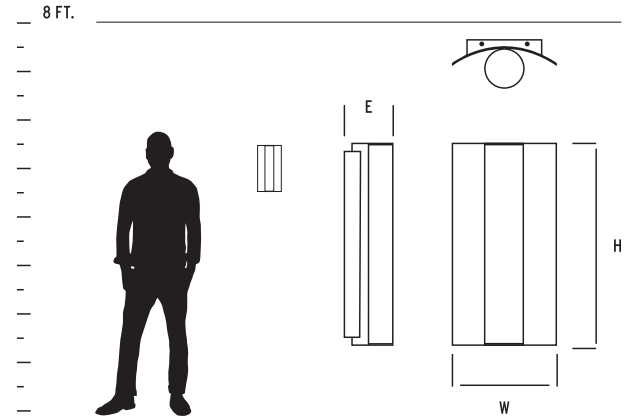

3-5020-15

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|--|---------------------------------|---|--------------------|---------------|
| 3-5020-XX | Matte White Acrylic | 15 Black 24 Satin Nickel 40 Aged Brass | 6.25"(w) x 12.125"(h) x 3"(ext) | 1 x 9w, 90CRI 3000k LED 626 Delivered Lumens | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Approved for vertical or horizontal mounting. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 11.3w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


ZEEPERS SCONCE

ADA




LED

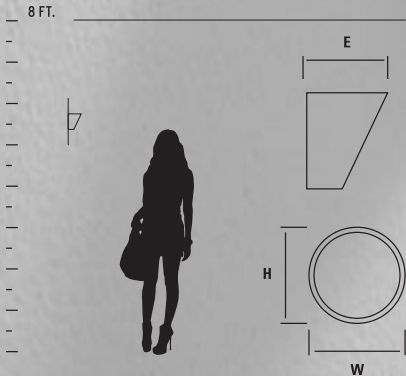

3-560-24





| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|-----------------------------------|--|---------------------------------|---|
| 3-560-XX | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 4.75"(w) x 4.75"(h) x 3.875"(ext) | 1 x 10.1w, 90CRI 3000k LED 321 Delivered Lumens | 120/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com





GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim. • Matte white acrylic diffuser is 1/8" thick. • Unit mounts to deep 4" octagonal or deep 4"x4" square junction box w/ single device mud ring.
- Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for wall and ceiling mount applications. • Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets. \• Oxygen reserves the right to modify designs at any time.

ZENITH SCONCE

ADA

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|----------------------------------|--|-----------------------------------|---|
| 3-556-XX | Matte White Acrylic | 14 Polished Chrome 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 3.5"(w) x 15.125"(h) x 3.5"(ext) | 1 x 12.2w, 90CRI 3000k LED 942 Delivered Lumens | 120V /277V 0-10V/Phase dimming |     |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cold rolled steel backplate and trim.
- Acrylic shade is 1/8", matte white finish.
- Unit mounts to deep 4" square junction box w/ single device mud ring or w/ optional cover plate deep 4" octagonal junction box.
- Approved for wall mount applications only.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Total luminaire power 14.6w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.



3-556-22

3-556-40
shown with optional
cover plate (Included)

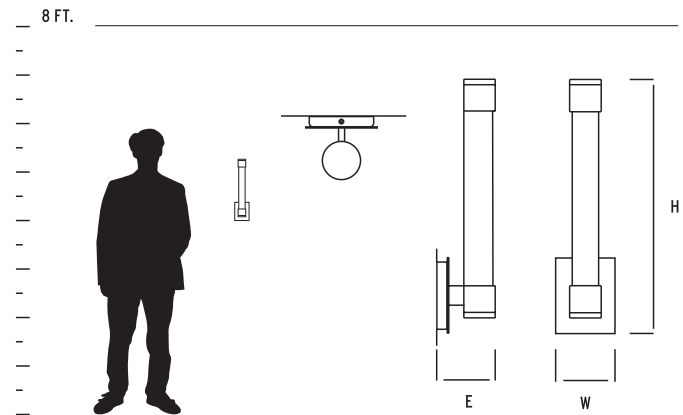

3-556-24


ZETA SCONCE

ADA

LED



3-530-40

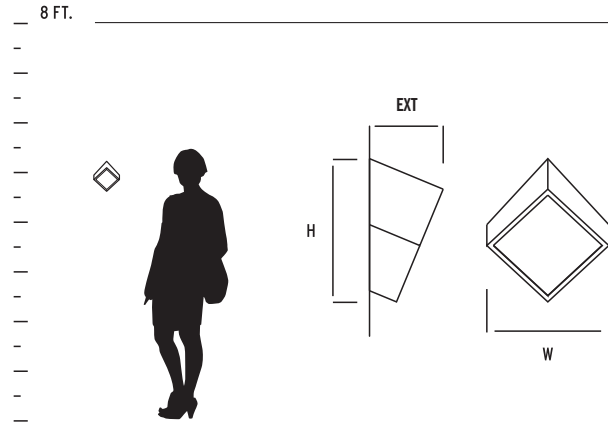

3-530-22



3-530-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|-------------------------------|---|---------------------------------|---------------|
| 3-530-XX | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 6.75"(w) x 7.75"(h) x 4"(ext) | 1 x 8.2w, 90CRI 3000k LED 361 Delivered Lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel backplate and trim. • Acrylic shade is 1/8", matte white finish. • Unit mounts to deep 4" octagonal or deep 4"x4" square junction box w/ single device mud ring.
- Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for wall and ceiling mount applications. • Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ZORA SCONCE

LED



3-51-650

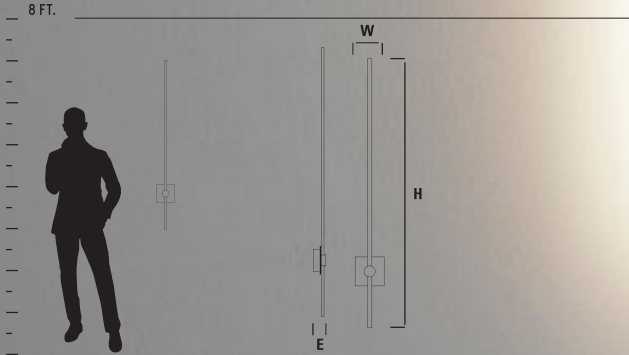




| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------------------------|---------------------|---|------------------------------------|-------------------------------|--------------------|---------------|
| 3-50-XXXX small | Matte White Acrylic | 650 White/Industrial Brass 1550 Black/Industrial Brass | 21.125"(w) x 5.25"(h) x 2.25"(ext) | 1 x 12.5w, 90CRI 3000k LED | 120V Triac dimming | |
| 3-51-XXXX medium | Matte White Acrylic | 650 White/Industrial Brass 1550 Black/Industrial Brass | 32"(w) x 5.25"(h) x 2.25"(ext) | 1 x 18w, 90CRI 3000k LED | 120V Triac dimming | |
| 3-52-XXXX large | Matte White Acrylic | 650 White/Industrial Brass 1550 Black/Industrial Brass | 47.75"(w) x 5.25"(h) x 2.25"(ext) | 1 x 24.8w, 90CRI 3000k LED | 120V Triac dimming | |

GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Matte white acrylic diffusers. • Unit mounts to a 4" octagonal junction box. • Approved for vertical or horizontal mounting. • Approved for wall mount applications only. • Fixture can swivel/rotate 45 degrees. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire power and lumen information • Oxygen reserves the right to modify designs at any time.




ceiling mounts

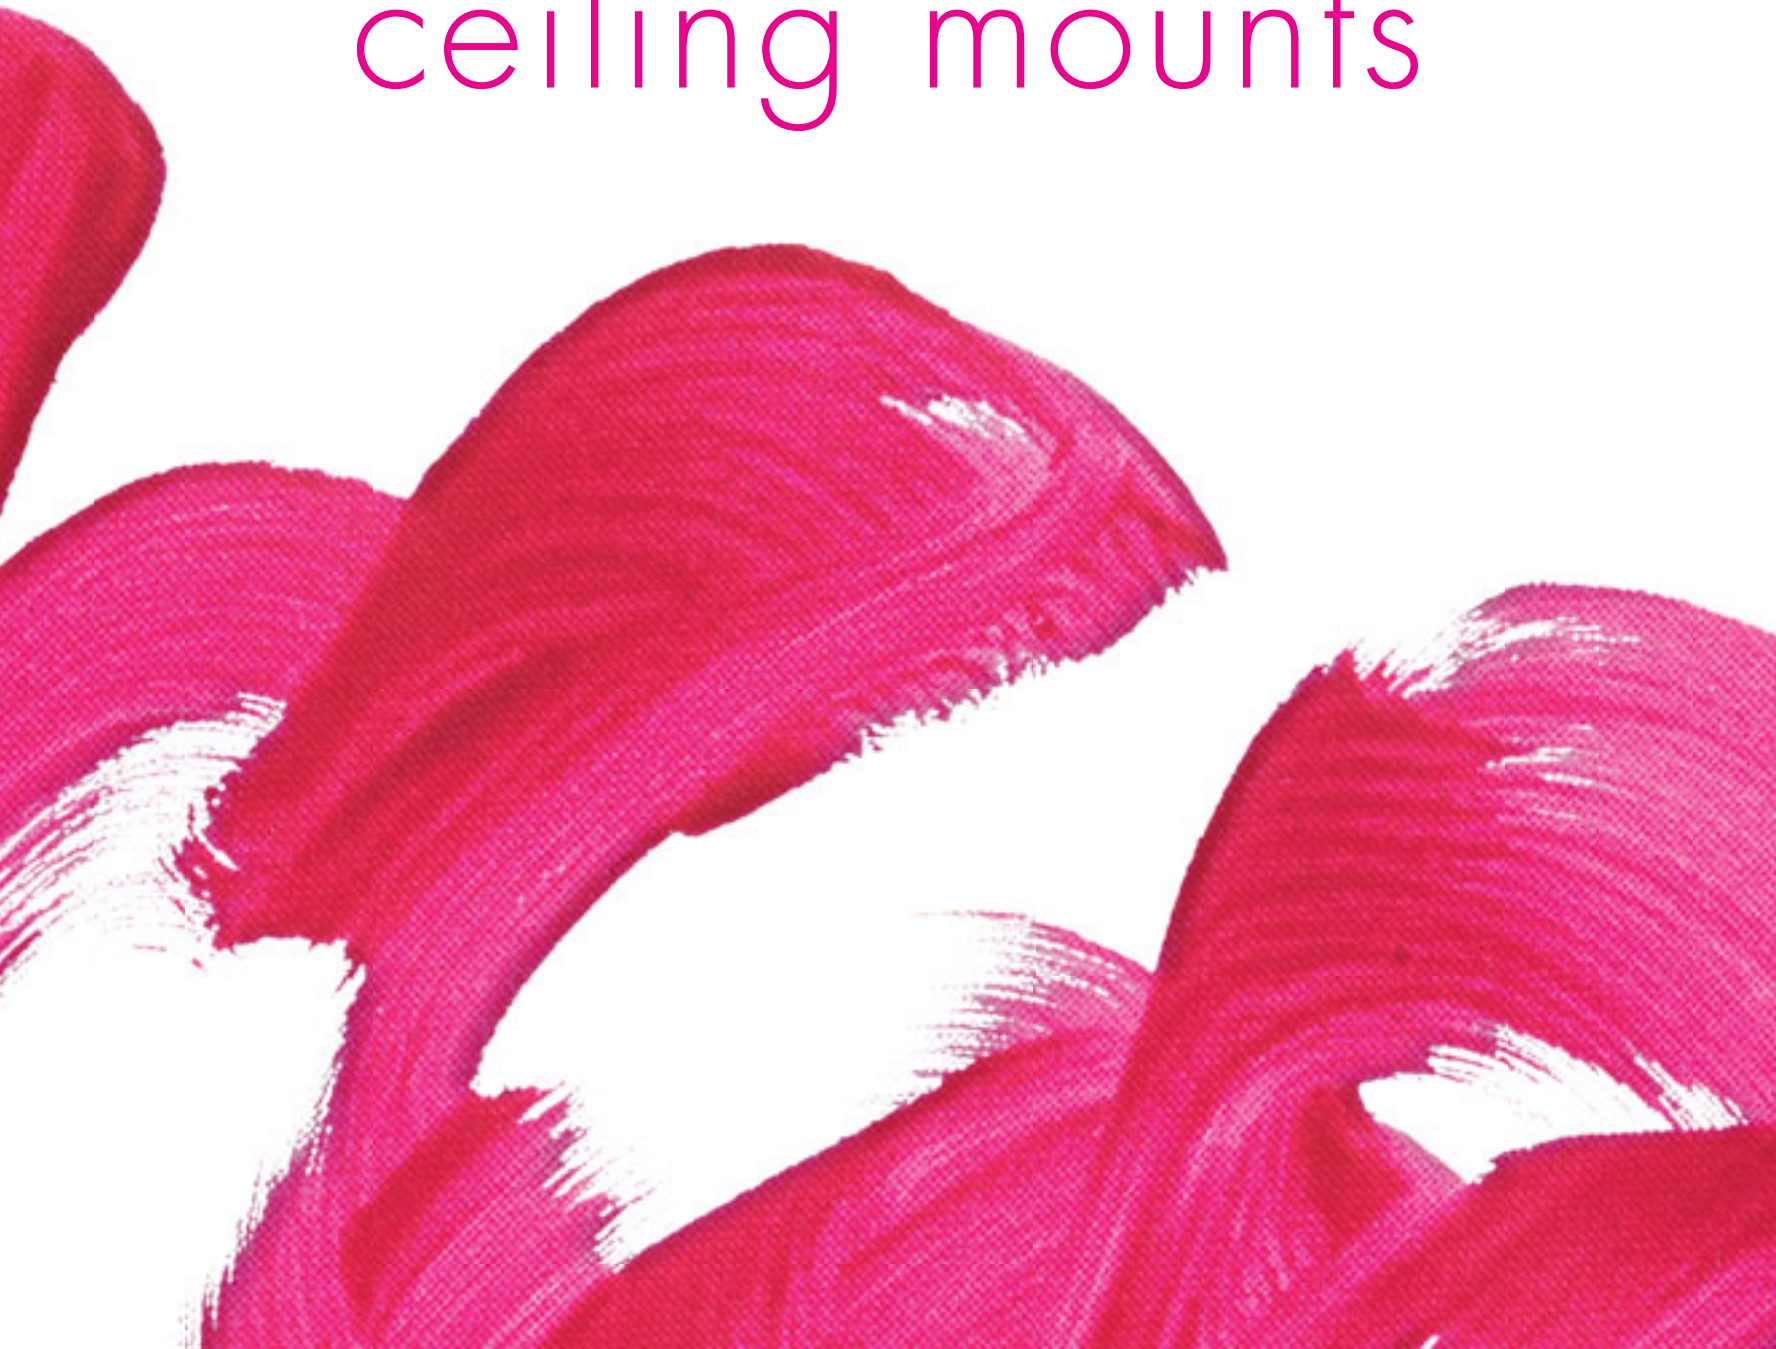


ALTAIR CEILING MOUNT

ADA

LED

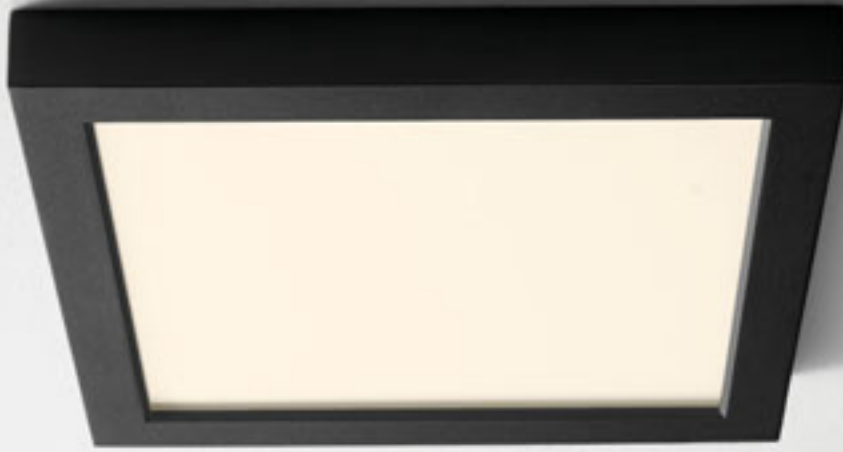

3-333-15

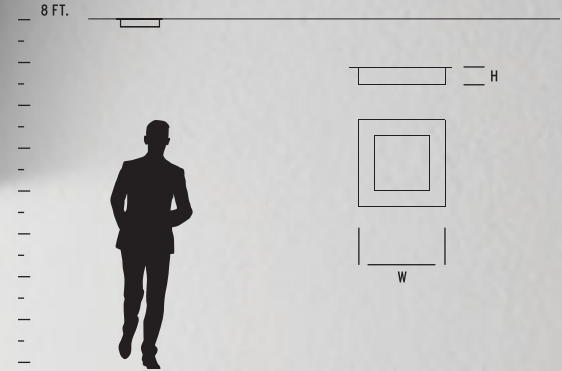

3-333-22



3-332-6

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|-------------------|---|-------------------|---|--------------------|--------------------------|
| 3-332-XX | Matte White Glass | 6 White 15 Black 22 Oiled Bronze 24 Satin Nickel | 5.75"(w) x 1"(h) | 1 x 10.5w, 90CRI 3000k LED 480 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT, ETL, damp |
| 3-333-XX | Matte White Glass | 6 White 15 Black 22 Oiled Bronze 24 Satin Nickel | 7.125"(w) x 1"(h) | 1 x 13.5w, 90CRI 3000k LED 800 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT, ETL, damp |
| 3-334-XX | Matte White Glass | 6 White 15 Black 22 Oiled Bronze 24 Satin Nickel | 9.125"(w) x 1"(h) | 1 x 18.5w, 90CRI 3000k LED 1064 Delivered Lumens | 120V Triac dimming | ADA COMPLIANT, ETL, damp |


GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Etched white glass diffuser. • Unit mounts to 4" octagonal junction box. • Approved for ceiling and wall mounted applications. • Total luminaire power for 3-332-XX is 10.9w, 3-333-XX is 12.9w and 3-334-XX is 18.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

AURORA CEILING MOUNT

ADA

LED

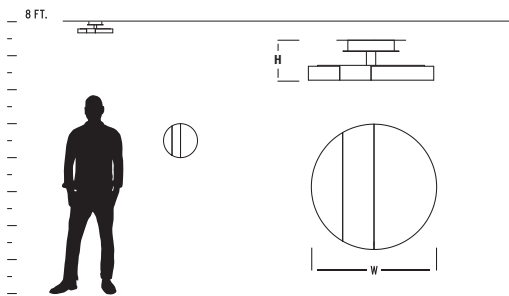

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|------------------|---|----------------------------------|---------------|
| 3-662-XX | Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 13.5"(w) x 4"(h) | 1 x 21.5w, 90CRI 3000k LED 1084 Delivered Lumens | 120V/277V 0-10V/Phase dimming | |


2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring.
- Approved for wall or ceiling mount applications. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 24.4w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

DIONE CEILING MOUNT

ADA LED EM

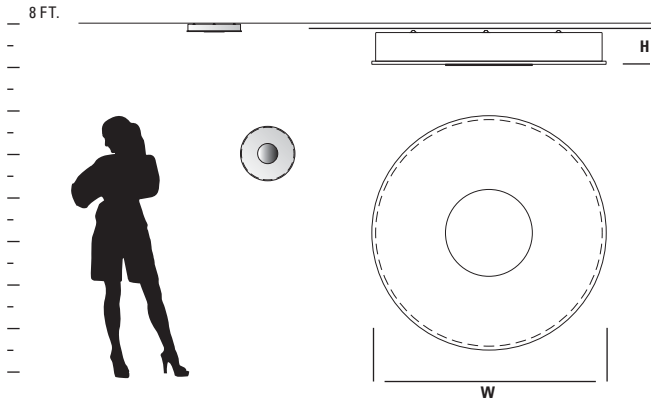

32-665-24



32-664-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------------------|---------------|-----------------|-------------------|--|---------------------------|--|
| 32-664-24 small | Frosted Glass | 24 Satin Nickel | 15"(w) x 2.25"(h) | 1 x 9.9w, 90CRI 3000k LED 422 Delivered Lumens | 120/277V 0-10V dimming | ADA COMPLIANT c UL us damp |
| 32-665-24 large | Frosted Glass | 24 Satin Nickel | 21"(w) x 2.25"(h) | 1 x 20.7w, 90CRI 3000k LED 807 Delivered Lumens | 120/277V 0-10V dimming | ADA COMPLIANT c UL us damp |
| 32-665-24-EM large | Frosted Glass | 24 Satin Nickel | 21"(w) x 2.25"(h) | 1 x 20.7w, 90CRI 3000k LED 807 Delivered Lumens | 120/277V 0-10V dimming | ADA COMPLIANT ETL us damp EM 90 MINUTE |

2700k, 3500k, 4000k color temperatures also available for non EMLED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Spun steel housing. • 1/8" frost white glass diffuser. • Units mount to 4" octagonal junction box. • Approved for wall or ceiling mount applications. • Total luminaire power 11.2w for 32-664-24 and 23.5w for 32-665-24. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)

• ETL required 90 minute emergency battery run time • 32 hour recharge time.

ECHO CEILING MOUNT

LED

EM

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------|--------------------------------|-----------------|---------------------|---|---------------------------------|----------------|
| 3-694-24 | Grass Shade With White Acrylic | 24 Satin Nickel | 14.5"(w) x 4"(h) | 2 x 10.1w, 90CRI 3000k LED 1277 Delivered Lumens | 120/277V 0-10V/Phase dimming | UL US damp |
| 3-694-24-EM | Grass Shade With White Acrylic | 24 Satin Nickel | 14.5"(w) x 4"(h) | 2 x 10.1w, 90CRI 3000k LED 1277 Delivered Lumens | 120/277V 0-10V/Phase dimming | ETL US damp EM |
| 3-695-24 | Grass Shade With White Acrylic | 24 Satin Nickel | 14.5"(w) x 7.75"(h) | 2 x 10.1w, 90CRI 3000k LED 1405 Delivered Lumens | 120/277V 0-10V/Phase dimming | UL US damp |
| 3-695-24-EM | Grass Shade With White Acrylic | 24 Satin Nickel | 14.5"(w) x 7.75"(h) | 2 x 10.1w, 90CRI 3000k LED 1405 Delivered Lumens | 120/277V 0-10V/Phase dimming | ETL US damp EM |

2700k, 3500k, 4000k color temperatures also available for non EMLED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Grass shades are natural bamboo fibers. • White acrylic diffuser is 1/8" thick. • Cast steel with acrylic finial. • Unit mounts to 4" octagonal junction box.
- Approved for ceiling mount applications only. • Total luminaire power 25.7w for 3-694-24 and 26.6w for 3-695-24. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)

- ETL required 90 minute emergency battery run time • 32 hour recharge time.



3-694-24



3-695-24

ELITE CEILING MOUNT

LED



8 FT.









3-644-22



3-645-15



3-644-6


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|-------------------|--|--------------------|---|
| 3-644-XX | Matte White Acrylic | 6 White 15 Black 22 Oiled Bronze 24 Satin Nickel | 5.5"(dia) x 1"(h) | 1 x 11w, 90CRI 3000k LED 592 Delivered Lumens | 120V Triac Dimming |    |
| 3-645-XX | Matte White Acrylic | 6 White 15 Black 22 Oiled Bronze 24 Satin Nickel | 7"(dia) x 1"(h) | 1 x 13w, 90CRI 3000k LED 823 Delivered Lumens | 120V Triac Dimming |    |

GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Etched white glass diffuser. • Unit mounts to 4" octagonal junction box. • Approved for ceiling and wall mounted applications. • Total luminaire power for 3-644-XX is 12.2w and 3-645-XX is 14w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ELLIPSE CEILING MOUNT

LED

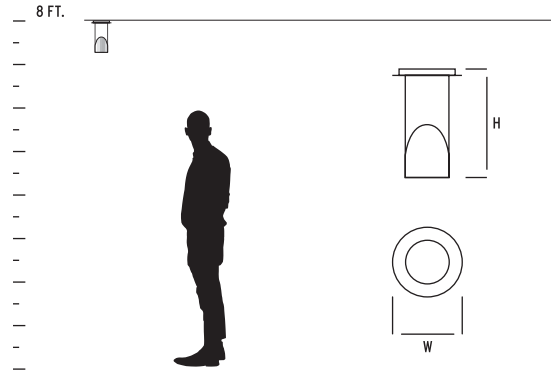

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|------------------------------|---|----------------------|---|---------------------------------|---------------|
| 3-353-1XX | 1 Matte Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 9.25"(h) | 1 x 6.1w, 90CRI 3000k LED 142 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-353-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 9.25"(h) | 1 x 6.1w, 90CRI 3000k LED 107 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-354-1XX | 1 Matte Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 9.25"(h) | 1 x 6.1w, 90CRI 3000k LED 176 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-354-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 9.25"(h) | 1 x 6.1w, 90CRI 3000k LED 191 Delivered Lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Glass diffuser is 1/8" matte opal • Models 3-353-XXX has 2.75" dia diffuser • Models 3-354-XXX has 3.5" dia diffuser • Unit mounts to deep 4" octagonal junction box. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for ceiling and wall mounted applications. • Total luminaire power is 7.1w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

IO CEILING MOUNT

LED EM



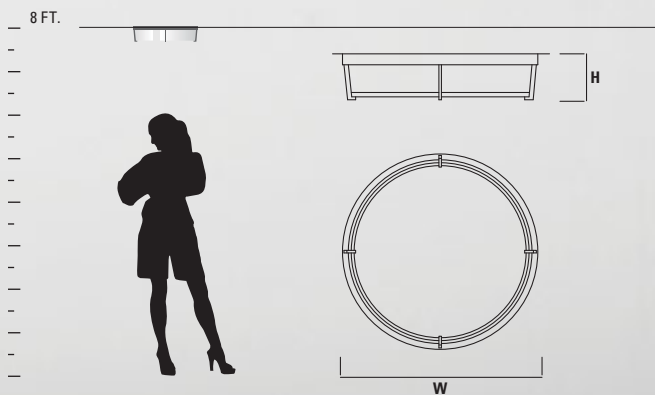


3-689-24





2-699-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|-------------|---------------------|----------------------------------|-----------------|---|---|---------------------------------|---|
| 2-699-24 | Matte White Acrylic | 24 Satin Nickel | 17"(w) x 4 "(h) | 22w + 40w T5 circline fluorescent (2GX13) | Electronic, HPF, Programmed Start, Universal Voltage (120-277V) | - |  |
| 3-689-XX | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 17"(w) x 4 "(h) | 2 x 10.1w, 90CRI 3000k LED 1294 delivered lumens | - | 120/277V 0-10V/Phase dimming |  |
| 3-689-XX-EM | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 17"(w) x 4 "(h) | 2 x 10.1w, 90CRI 3000k LED 1294 delivered lumens | - | 120/277V 0-10V/Phase dimming |  |

2700k, 3500k, 4000k color temperatures also available for non EMLED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


• Cold rolled steel housing. • Matte white acrylic is formed 1/16" thick. • Unit mounts to 4" octagonal junction box. • Toolless access to lamp for fluorescent model. • Approved for ceiling mount applications only. • Total luminaire power 25.6w for LED models. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)

• ETL required 90 minute emergency battery run time • 32 hour recharge time.

JOURNEY CEILING MOUNT

LED

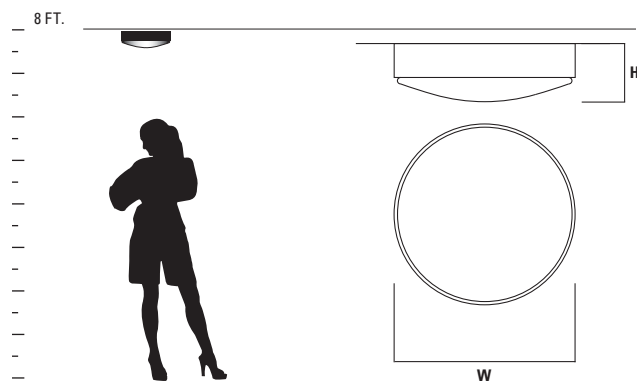

3-626-24



3-624-14



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|---------------------|---|------------------|---|---------------------------------|------------------------|
| 3-622-XX small | Matte Opal Glass | 15 Black 24 Satin Nickel | 11"(w) x 4.5"(h) | 1 x 10.1w, 90CRI 3000k LED 608 delivered lumens | 120/277V 0-10V/Phase dimming | cUL _{US} damp |
| 3-623-XX medium | Matte Opal Glass | 14 Polished Chrome 15 Black 24 Satin Nickel | 14"(w) x 4.5"(h) | 1 x 10.1w, 90CRI 3000k LED 728 delivered lumens | 120/277V 0-10V/Phase dimming | cUL _{US} damp |
| 3-624-XX medium | Matte Opal Glass | 14 Polished Chrome 24 Satin Nickel | 14"(w) x 4.5"(h) | 2 x 10.1w, 90CRI 3000k LED 1460 delivered lumens | 120/277V 0-10V/Phase dimming | cUL _{US} damp |
| 3-625-24 medium | Matte White Acrylic | 24 Satin Nickel | 14"(w) x 4.5"(h) | 1 x 10.1w, 90CRI 3000k LED 698 delivered lumens | 120/277V 0-10V/Phase dimming | cUL _{US} damp |
| 3-626-XX medium | Matte White Acrylic | 14 Polished Chrome 24 Satin Nickel | 14"(w) x 4.5"(h) | 2 x 10.1w, 90CRI 3000k LED 1363 delivered lumens | 120/277V 0-10V/Phase dimming | cUL _{US} damp |

2700k, 3500k, 4000k color temperatures also available. Contact Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Spun steel housing. • Matte white acrylic is 1/16" thick. • Opal glass diffuser is 1/8" thick. • Unit mounts to 4" octagonal junction box. • Approved for ceiling mount applications only.
- Total luminaire power 13.1w for 3-622-24, 13w for 3-623-XX, 25.7w for 3-624-XX, 12.9w for 3-625-24, and 25.9w for 3-626-XX. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.







EM



3-625-24-EM



3-623-14-EM

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------------------|---------------------|---------------------------------------|------------------|--|---------------------------------|---|
| 3-623-XX-EM medium | Matte Opal Glass | 14 Polished Chrome 24 Satin Nickel | 14"(w) x 4.5"(h) | 1 x 10.1w, 90CRI 3000k LED 728 delivered lumens | 120/277V 0-10V/Phase dimming |    |
| 3-625-24-EM medium | Matte White Acrylic | 24 Satin Nickel | 14"(w) x 4.5"(h) | 1 x 10.1w, 90CRI 3000k LED 698 delivered lumens | 120/277V 0-10V/Phase dimming |    |

GENERAL SPECIFICATIONS:

- Spun steel housing. • Matte white acrylic is 1/16" thick. • Opal glass diffuser is 1/8" thick. • Unit mounts to 4" octagonal junction box. • Approved for ceiling mount applications only.
- Total luminaire power 13w for 3-623-XX-EM, 12.9w for 3-625-24-EM. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)

- ETL required 90 minute emergency battery run time • 32 hour recharge time.

MODULO CEILING MOUNT

LED EM



3-683-24





| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------------------|---------------------|----------------------------------|-------------------|---|---------------------------------|---------------|
| 3-683-XX large | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 16"(w) x 4.75"(h) | 2 x 10.1w, 90CRI 3000k LED 1742 delivered lumens | 120/277V 0-10V/Phase dimming | |
| 3-683-XX-EM large | Matte White Acrylic | 24 Satin Nickel 40 Aged Brass | 16"(w) x 4.75"(h) | 2 x 10.1w, 90CRI 3000k LED 1742 delivered lumens | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available for non EMLED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Cold rolled steel housing. • Matte white acrylic is formed 1/16" thick. • Unit mounts to 4" octagonal junction box. • Approved for ceiling mount applications only. • Total luminaire power 26.2w for 3-683-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


EMERGENCY BATTERY BACKUP MODELS (EM)

• ETL required 90 minute emergency battery run time • 32 hour recharge time.

ORACLE CEILING MOUNT

ADA

LED

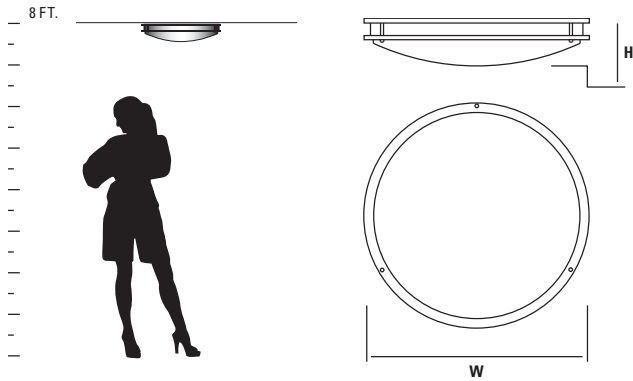

3-618-22



3-620-15



3-619-40

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|---------------------|---|----------------------|---|---------------------------------|--------------------------|
| 3-618-XX small | Matte White Acrylic | 14 Polished Chrome 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 10.5"(w) x 3.5"(h) | 1 x 10.1w, 90CRI 3000k LED 773 delivered lumens | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus damp |
| 3-619-XX medium | Matte White Acrylic | 14 Polished Chrome 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 17.75"(w) x 4.25"(h) | 1 x 10.1w, 90CRI 3000k LED 1010 delivered lumens | 120/277V 0-10V/Phase dimming | cULus damp |
| 3-620-XX medium | Matte White Acrylic | 14 Polished Chrome 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 17.75"(w) x 4.25"(h) | 2 x 10.1w, 90CRI 3000k LED 1952 delivered lumens | 120/277V 0-10V/Phase dimming | cULus damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Formed steel trim. • White acrylic diffuser is 1/16" thick. • Unit mounts to 4" octagonal junction box. • Approved for wall or ceiling mount applications.
- Total luminaire power 13.1w for 3-618-XX, 13.2w for 3-619-XX, and 26.3w for 3-620-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EM



3-619-22-EM



3-619-40-EM



3-620-24-EM

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------------------|---------------------|---|----------------------|---|---------------------------------|---------------|
| 3-619-XX-EM medium | Matte White Acrylic | 14 Polished Chrome 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 17.75"(w) x 4.25"(h) | 1 x 10.1w, 90CRI 3000k LED 1010 delivered lumens | 120/277V 0-10V/Phase dimming | |
| 3-620-XX-EM medium | Matte White Acrylic | 14 Polished Chrome 15 Black 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 17.75"(w) x 4.25"(h) | 2 x 10.1w, 90CRI 3000k LED 1952 delivered lumens | 120/277V 0-10V/Phase dimming | |

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • Formed steel trim. • White acrylic diffuser is 1/16" thick. • Unit mounts to 4" octagonal junction box. • Approved for wall or ceiling mount applications.
- Total luminaire power 13.2w for 3-619-XX-EM, and 26.3w for 3-620-XX-EM. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)

- ETL required 90 minute emergency battery run time • 32 hour recharge time.


PEEPERS CEILING MOUNT




ADA

LED

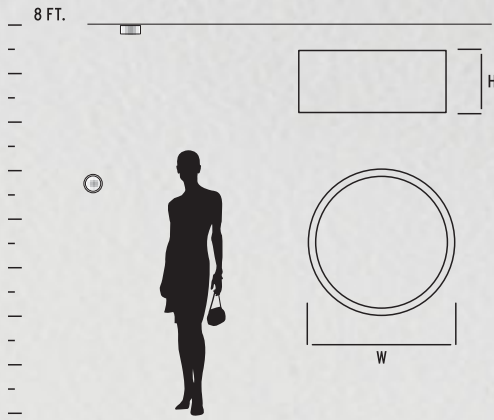

3-600-24



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|------------------|--|---------------------------------|---|
| 3-600-XX | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 4.75"(w) x 2"(h) | 1 x 10.1w, 90CRI 3000k LED 454 delivered lumens | 120/277V 0-10V/Phase dimming |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Unit mounts to deep 4" octagonal junction box. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for ceiling and wall mounted applications. • Total luminaire power 13.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.



3-600-22



3-600-40

EM



32-601-20



32-601-40



32-601-24

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------|---------------------|--|-----------------------|---|------------------------|--------------------------------|
| 32-601-XX | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel 40 Aged Brass | 10.25"(w) x 3.375"(h) | 1 x 18.2w, 90CRI 3000k LED 1110 delivered lumens | 120/277V 0-10V dimming | ADA COMPLIANT c UL US damp |
| 32-601-XX-EM | Matte White Acrylic | 20 Polished Nickel 24 Satin Nickel 40 Aged Brass | 10.25"(w) x 3.375"(h) | 1 x 18.2w, 90CRI 3000k LED 1110 delivered lumens | 120/277V 0-10V dimming | ADA COMPLIANT c ETL US damp EM |

2700k, 3500k, 4000k color temperatures also available for non EMLED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Unit mounts to 4" octagonal or 2"x3" junction box. • Approved for ceiling and wall mounted applications.
- Total luminaire power 21.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

EMERGENCY BATTERY BACKUP MODELS (EM)


- ETL required 90 minute emergency battery run time • 32 hour recharge time.

PILAR CEILING MOUNT

LED



3-309-115

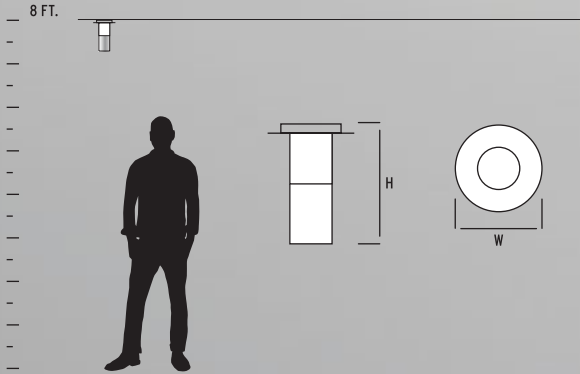



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|------------------------------|---|-----------------------|---|---------------------------------|---------------|
| 3-308-1XX | 1 Matte Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 9"(h) | 1 x 6.2w, 90CRI 3000k LED 226 delivered lumens | 120/277V 0-10V/Phase dimming | c US |
| 3-308-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 9"(h) | 1 x 6.2w, 90CRI 3000k LED 234 delivered lumens | 120/277V 0-10V/Phase dimming | c US |
| 3-309-1XX | 1 Matte Opal Glass | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 10.75"(h) | 1 x 6.2w, 90CRI 3000k LED 280 delivered lumens | 120/277V 0-10V/Phase dimming | c US |
| 3-309-2XX | 2 Matte White Acrylic | 15 Black 20 Polished Nickel 24 Satin Nickel | 5.875"(w) x 10.75"(h) | 1 x 6.2w, 90CRI 3000k LED 285 delivered lumens | 120/277V 0-10V/Phase dimming | c US |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Glass difusser is 1/8" thick matte opal • Diffuser screws onto housing with integral threaded fitting.
- Model 3-308-XXX has 2.75" dia diffuser • Model 3-309-XXX has 3.5" dia diffuser • Unit mounts to deep 4" octagonal junction box. • Driver mounts inside junction box.
- Unit requires 2.5" deep junction box. • Approved for ceiling and wall mounted applications. • Total luminaire power is 7.1w. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

PYXIS CEILING MOUNT

ADA LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|---|-------------------|--|----------------------------------|---|
| 3-610-XX | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel 40 Aged Brass | 4.875"(w) x 2"(h) | 1 x 10.1w, 90CRI 3000k LED 518 Delivered Lumens | 120/277V 0-10V/Phase dimming. |    |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cold rolled steel housing.
- White acrylic diffuser is 1/16" thick.
- Unit mounts to deep 4" octagonal junction box.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Approved for ceiling and wall mounted applications.
- Total luminaire power 13.1w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.





3-610-22



3-610-40

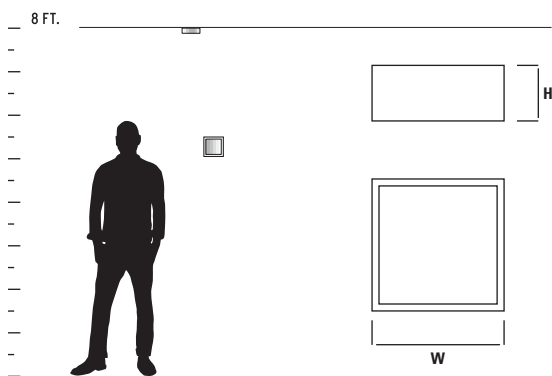

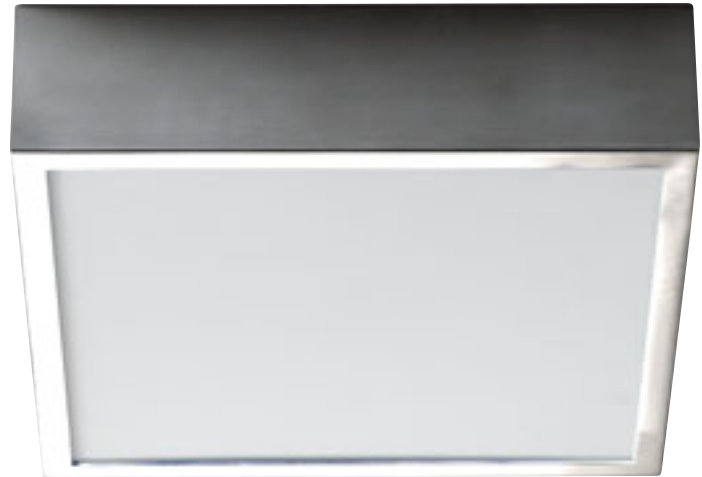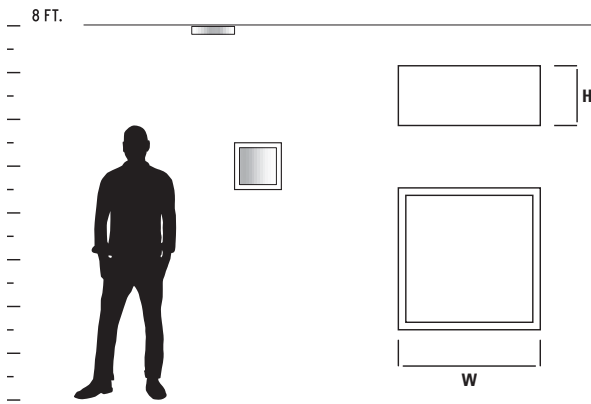

32-612-20



32-612-40

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------|---------------------|-------------------------------------|----------------------|---|---------------------------|---------------|
| 32-612-XX | Matte White Acrylic | 20 Polished Nickel 40 Aged Brass | 10.25"(w) x 3.25"(h) | 1 x 22.2w, 90CRI 3000k LED 1329 Delivered Lumens | 120/277V 0-10V dimming | |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Unit mounts to 4" octagonal or 2"x3" junction box. • Approved for ceiling and wall mounted applications.
- Total luminaire power 26.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

RHYTHM CEILING MOUNT

ADA LED FLOURESCENT

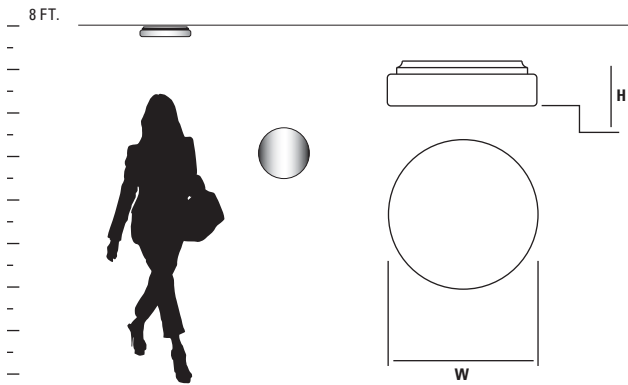

2-6138-6



3-649-6

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|--------------------------|---------------------|---------|-------------------|--|-------------------------------------|------------------------------|----------------------------|
| 2-6138-6 small | Matte White Acrylic | 6 White | 10"(w) x 3"(h) | 1 x 22w T9 circline fluorescent (G10Q) | Electronic HPF, instant start, 120V | -- | ADA COMPLIANT C UL US damp |
| 2-6139-6 large | Matte White Acrylic | 6 White | 14"(w) x 2.75"(h) | 22w + 32w T9 circline fluorescent (G10Q) | Electronic HPF, instant start, 120V | -- | ADA COMPLIANT C UL US damp |
| 3-648-6 small | Matte White Acrylic | 6 White | 10"(w) x 3"(h) | 1 x 10.1w, 90CRI 3000k LED 803 delivered lumens | -- | 120/277V 0-10V/Phase dimming | ADA COMPLIANT C UL US damp |
| 3-649-6 large | Matte White Acrylic | 6 White | 14"(w) x 2.75"(h) | 2 x 10.1w, 90CRI 3000k LED 1866 delivered lumens | -- | 120/277V 0-10V/Phase dimming | ADA COMPLIANT C UL US damp |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cold rolled steel housing. • White acrylic diffuser is 1/16" thick. • Unit mounts to 4" octagonal junction box. • Toolless access to lamp for fluorescent models. • Approved for wall or ceiling mount applications. • Total luminaire power 13.1w for 3-648-6 and 25.8w for 3-649-6. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

ZURI CEILING MOUNT

ADA

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------|------------------|--|---------------------|---|----------------------------------|--------------------------|
| 32-630-XX | Satin Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 7.25"(w) x 3"(h) | 1 x 10.1w, 90CRI 3000k LED 542 delivered lumens | 120V/277V 0-10V/Phase dimming | ADA COMPLIANT cULus damp |
| 32-631-XX | Satin Opal Glass | 15 Black 24 Satin Nickel 40 Aged Brass | 11.25"(w) x 3.5"(h) | 1 x 20.7w, 90CRI 3000k LED 1328 delivered lumens | 120V/277V 0-10V/Phase dimming | ADA COMPLIANT cULus damp |

2700k, 3500k, 4000k color temperatures also available for LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Unit mounts to deep 4" octagonal junction box or deep 4"x4" square junction box w/ single device mud ring. • Approved for ceiling mount applications only. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Total luminaire power 13.1w for 32-630-XX and 23.5w for 32-631-XX. • Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.






outdoor



APERTO OUTDOOR

LED

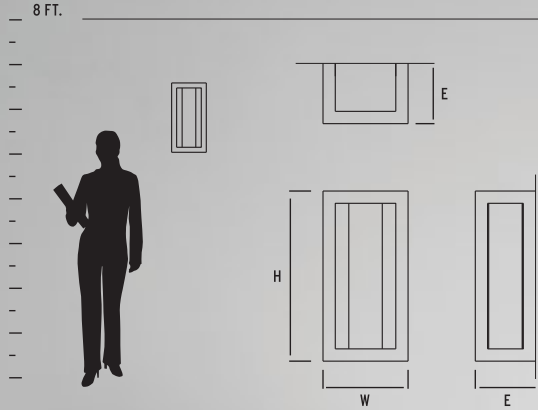

3-724-15



3-722-15



3-723-15

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|----------|-------------------------------|--|--------------------|---------------|
| 3-722-15 small | 15 Black | 6"(w) x 12"(h) x 4.25"(ext) | 1 x 12w, 3000k LED 465 Delivered Lumens | 120V Triac Dimming | |
| 3-723-15 medium | 15 Black | 6.5"(w) x 16"(h) x 4.25"(ext) | 1 x 12w, 3000k LED 546 Delivered Lumens | 120V Triac Dimming | |
| 3-724-15 large | 15 Black | 8"(w) x 18"(h) x 4.5"(ext) | 1 x 18w, 3000k LED 796 Delivered Lumens | 120V Triac Dimming | |

GENERAL SPECIFICATIONS:




- Cast aluminum housing. • Etched white glass diffuser. • Unit mounts to 4" octagonal junction box. • LED driver on board. • Approved for wall mount applications. • Approved for vertical mounting only. • Total luminaire power 12w for 3-722-XX and 18.5w for 7-723-XX. • Visit www.oxygenlighting.com for technical cut sheets and total luminaire for 3-724-XX.
- Oxygen reserves the right to modify designs at any time.

CADET OUTDOOR

ADA


LED



| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------------------|------------------------------------|---|----------|---|
| 3-748-XX | 15 Black 16 Brushed Aluminum | 5.125"(w) x 5.125"(h) x 3.25"(ext) | 2 x 3w, 3000k LED 281 Delivered Lumens | 110-277V |    |


GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Clear glass diffuser. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications. • Approved for vertical or horizontal mounting.
- Total luminaire power 4.9w. • Visit www.oxygenlighting.com for technical cut sheets and total luminaire. • Oxygen reserves the right to modify designs at any time.

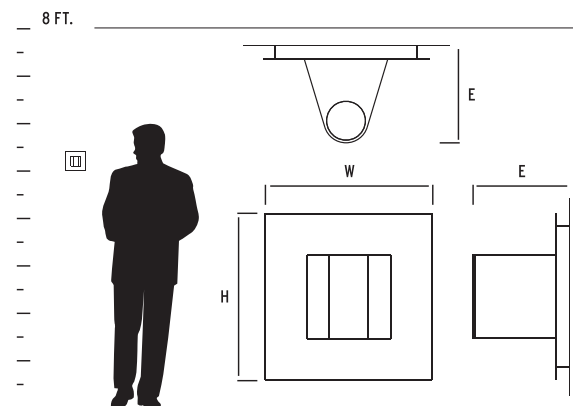

CALIBER OUTDOOR

LED

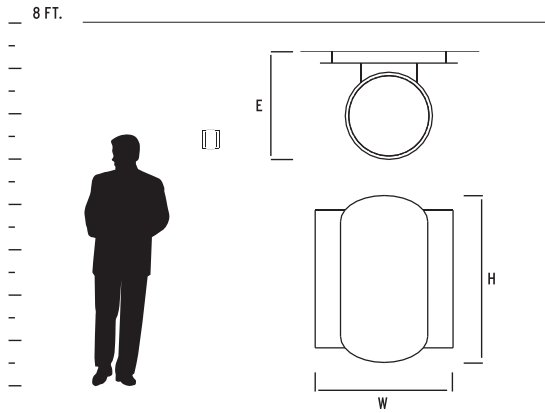

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------------------------|-------------------------------------|---|----------|---|
| 3-733-XX | 15 Black 16 Brushed Aluminum | 5.125"(w) x 5.625"(h) x 4.375"(ext) | 2 x 3w, 3000k LED 209 Delivered Lumens | 110-277V |  |


GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications. • Approved for vertical mounting only.
- Total luminaire power 4.7w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

CALYPSO OUTDOOR

ADA

LED

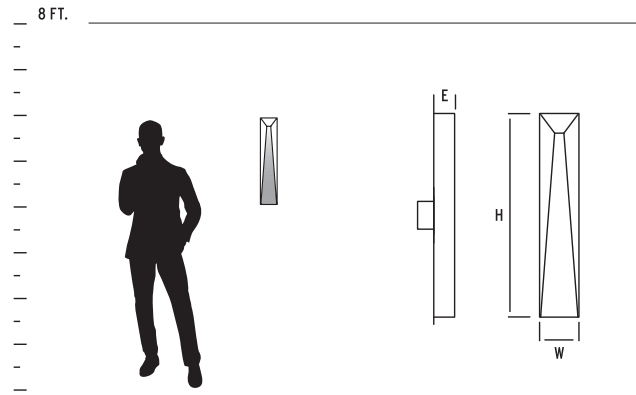

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|------------------------------|----------------------------|----------------------------------|----------------------------|---------------------------------|---------------------------|
| 3-730-XX small | Polished White Polycarbonate | 16 Gray 22 Oiled Bronze | 4.25"(w) x 16.5"(h) x 2.25"(ext) | 1 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT C UL US Wet |
| 3-731-XX large | Polished White Polycarbonate | 16 Gray 22 Oiled Bronze | 4.25"(w) x 22"(h) x 2.25"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT C UL US Wet |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing.
- Matte white polycarbonate diffuser is 1/16" thick.
- Unit mounts to deep 4" octagonal or deep 4"x4" junction box w/ horizontally mounted single device mud ring.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Approved for wall mount applications.
- Total luminaire power 13w for 3-730-XX and 25.9w for 3-731-XX.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

CERES OUTDOOR

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------|----------------------------|-------------------------------|----------------------------|---------------------------------|---------------|
| 3-726-XX | Frosted Glass | 16 Gray 22 Oiled Bronze | 4.75"(w) x 4.75"(h) x 5"(ext) | 1 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cULus wet |
| 3-727-XX | Frosted Glass | 16 Gray 22 Oiled Bronze | 4.75"(w) x 4.75"(h) x 5"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cULus wet |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing.
- Frosted glass lenses.
- Unit mounts to deep 4" octagonal or deep 4"x4" junction box.
- Unit requires 2.5" deep junction box.
- Driver mounts inside junction box.
- Approved for wall mount application only.
- Approved for vertical and horizontal wall mount applications.
- Total luminaire power 13.1w for 3-726-XX and 26.2w for 3-727-XX.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.




3-727-22

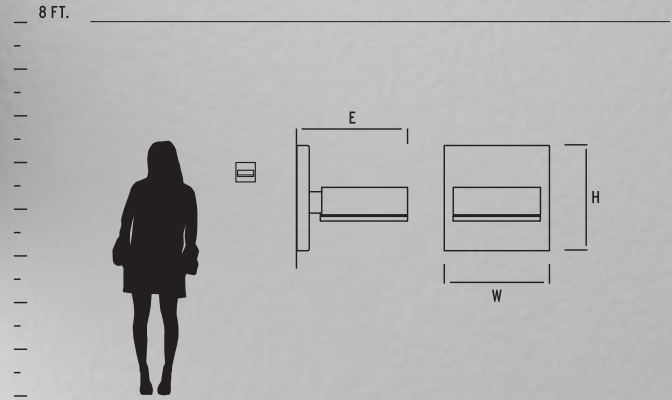

3-726-22

CORPUS OUTDOOR

LED

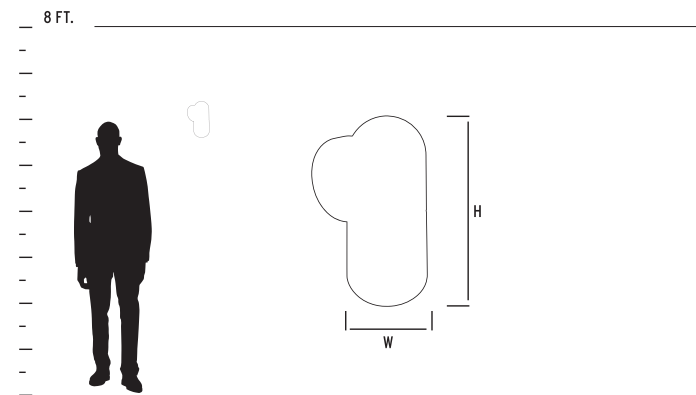

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|-------------------|----------|------------------------------------|-------------------------|--------------------|---------------|
| 3-757-15 small | Matte White Glass | 15 Black | 4.875"(w) x 8"(h) x 4.75"(ext) | 1 x 6w, 90CRI 3000k LED | 120V Triac Dimming | |
| 3-758-15 large | Matte White Glass | 15 Black | 5.875"(w) x 10.375"(h) x 5.5"(ext) | 1 x 8w, 90CRI 3000k LED | 120V Triac Dimming | |

GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Matte white glass diffuser. • Unit mounts to deep 4" octagonal junction box. • Approved for wall mount application only. • Approved for vertical wall mount applications. • Total luminaire power 10.3w for 3-726-XX and 20.5w for 3-727-XX. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information.
- Oxygen reserves the right to modify designs at any time.


DUO OUTDOOR

ADA

LED



3-703-16

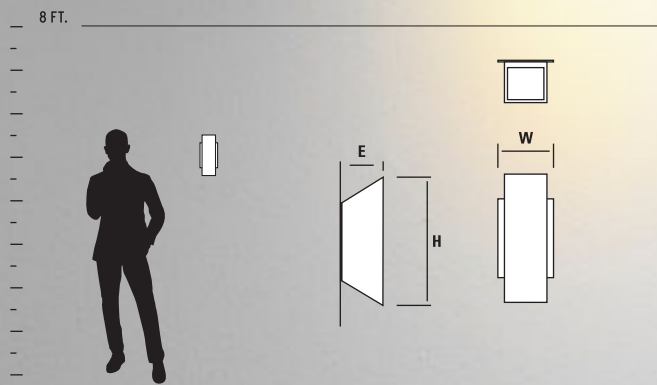



| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------|----------------------------|---------------------------------|----------------------------|---------------------------------|-------------------------|
| 3-702-XX small | Frosted Glass | 16 Gray 22 Oiled Bronze | 5.25"(w) x 12.125"(h) x 4"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus wet |
| 3-703-XX large | Frosted Glass | 16 Gray 22 Oiled Bronze | 6"(w) x 14"(h) x 6"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cULus wet |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing.
- Frosted glass lenses.
- 3-702-XX mounts to 4" octagonal junction box.
- 3-703-XX mounts to 4" octagonal junction box w/ horizontally mounted single device mud ring.
- Approved for wall mount applications only.
- Total luminaire power 26.2w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

ELIF OUTDOOR

ADA LED

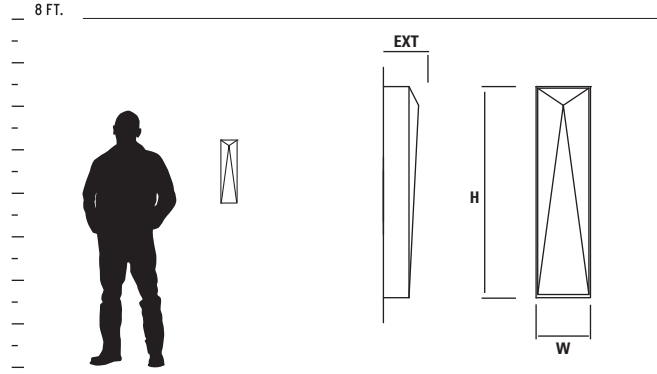

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|------------------------------|----------------------------|----------------------------------|----------------------------|---------------------------------|-------------------------|
| 3-736-XX small | Polished White Polycarbonate | 16 Gray 22 Oiled Bronze | 4.25"(w) x 16.5"(h) x 2.75"(ext) | 1 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus wet |
| 3-737-XX large | Polished White Polycarbonate | 16 Gray 22 Oiled Bronze | 4.25"(w) x 22"(h) x 2.75"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus wet |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Matte white polycarbonate diffuser is 1/16" thick. • Unit mounts to deep 4" octagonal or deep 4"x4" junction box w/ single device mud ring.
- Driver mounts inside junction box. • Unit requires 2.5" deep junction box. • Approved for wall mount applications. • Total luminaire power 13w for 3-736-XX and 25.7w for 3-737-XX.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


ERIS OUTDOOR

ADA

LED



3-721-16

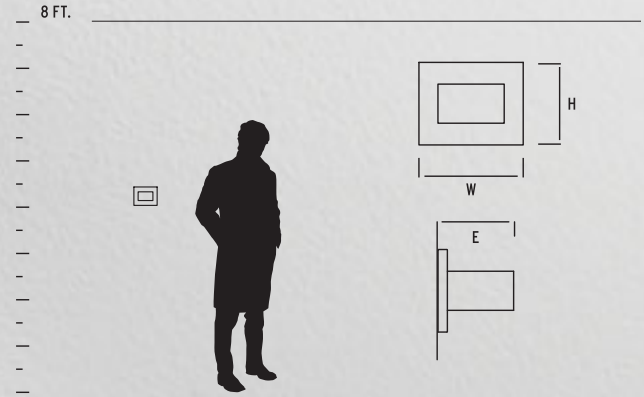

3-721-22



3-720-16

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------|----------------------------|----------------------------|----------------------------|---------------------------------|-------------------------|
| 3-720-XX | Frosted Glass | 16 Gray 22 Oiled Bronze | 6"(w) x 4.75"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus wet |
| 3-721-XX | Frosted Glass | 16 Gray 22 Oiled Bronze | 6"(w) x 4.75"(h) x 4"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT cULus wet |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:


- Cast aluminum housing. • Frosted glass lenses. • Unit mounts to deep 4" octagonal or deep 4"x4" junction box. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for wall mount application only. • Approved for horizontal or vertical mounting. • Total luminaire power 13.1w for 3-720-XX and 26.2w for 3-721-XX.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


ESPRIT OUTDOOR

LED





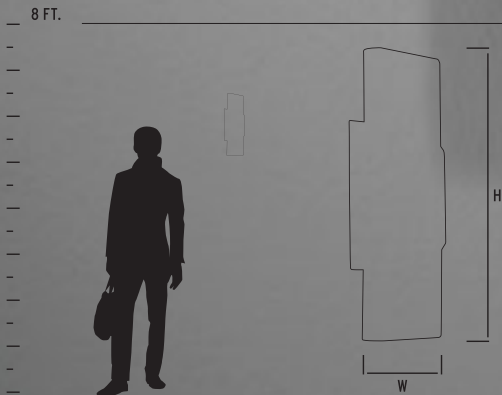

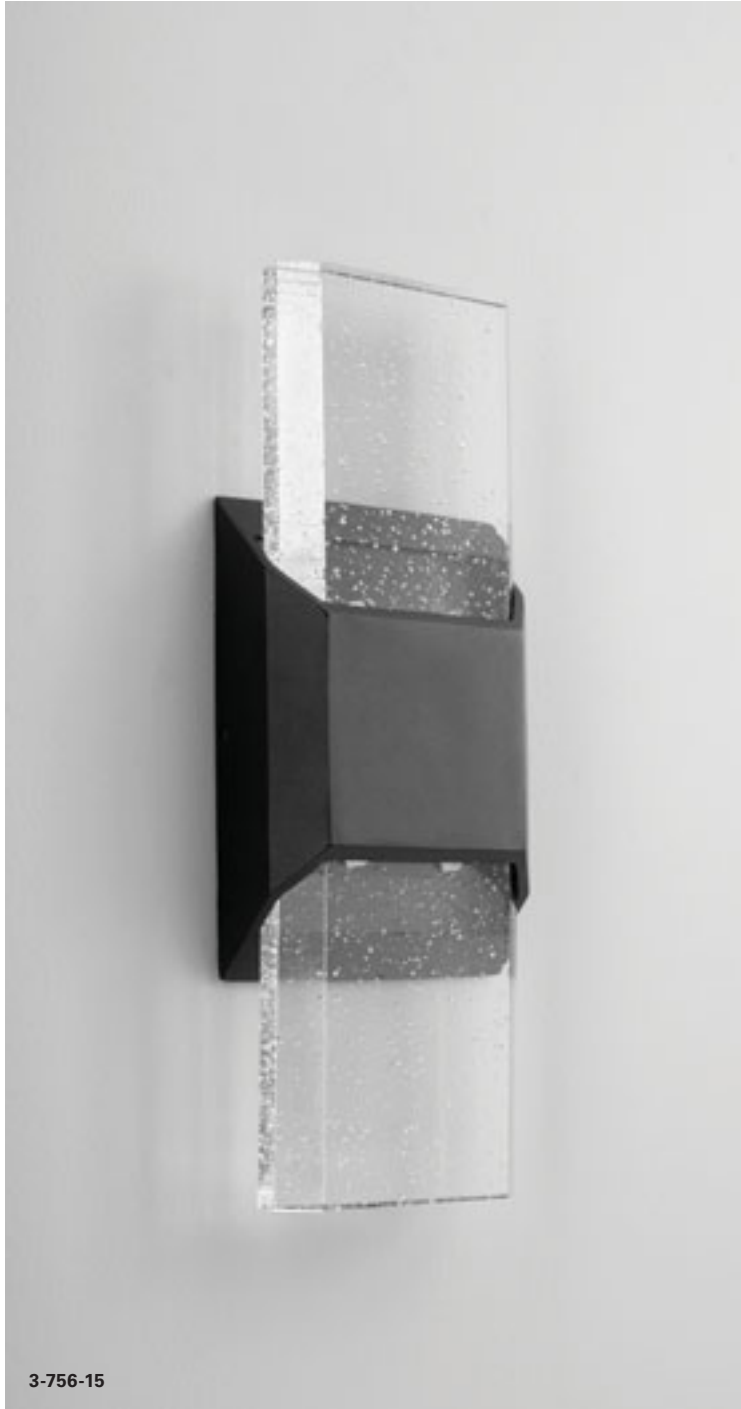3-755-15





3-756-15

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|--------------------|----------|------------------------------|-------------------------|--------------------|---|
| 3-755-15 small | Clear Bubble Glass | 15 Black | 5.5"(w) x 13.5"(h) x 2"(ext) | 1 x 6w, 90CRI 3000k LED | 120V Triac Dimming |   |
| 3-756-15 large | Clear Bubble Glass | 15 Black | 5.5"(w) x 15"(h) x 2"(ext) | 2 x 6w, 90CRI 3000k LED | 120V Triac Dimming |   |

GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Clear bubble glass. • Unit mounts to deep 4" octagonal junction box. • LED driver on board. • Approved for wall mount application only. • Approved for vertical wall mount applications. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

HELIO OUTDOOR

ADA

LED

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|---------------------------|----------|---------------------------------|--|--------------------|----------------------------|
| 3-743-15 small | 15 Black | 4.75"(w) x 9.25"(h) x 3"(ext) | 1 x 10w, 3000k LED 298 Delivered Lumens | 120V Triac Dimming | ADA COMPLIANT, ETL US, wet |
| 3-744-15 medium | 15 Black | 4.75"(w) x 12"(h) x 3.125"(ext) | 1 x 12w, 3000k LED 322 Delivered Lumens | 120V Triac Dimming | ADA COMPLIANT, ETL US, wet |
| 3-745-15 large | 15 Black | 6.375"(w) x 16"(h) x 4"(ext) | 1 x 18w, 3000k LED 522 Delivered Lumens | 120V Triac Dimming | ADA COMPLIANT, ETL US, wet |


GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Clear glass diffuser with white inside. • Unit mounts to 4" octagonal junction box. • LED driver on board. • Approved for wall mount applications. • Approved for vertical mounting only. • Total luminaire power 15.3w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.



KALDOR OUTDOOR

LED

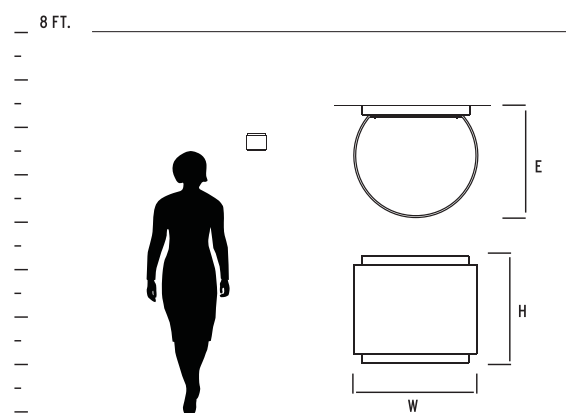

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------------------|-----------------------------------|---|----------|---------------|
| 3-734-XX | 15 Black 16 Brushed Aluminum | 5.125"(w) x 5.125"(h) x 5.5"(ext) | 2 x 3w, 3000k LED 295 Delivered Lumens | 110-277V | |

GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Unit mounts to 4" octagonal junction box. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for wall mount applications. • Approved for horizontal mounting only. • Total luminaire power 4.7w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


KARME OUTDOOR

ADA

LED



3-739-16

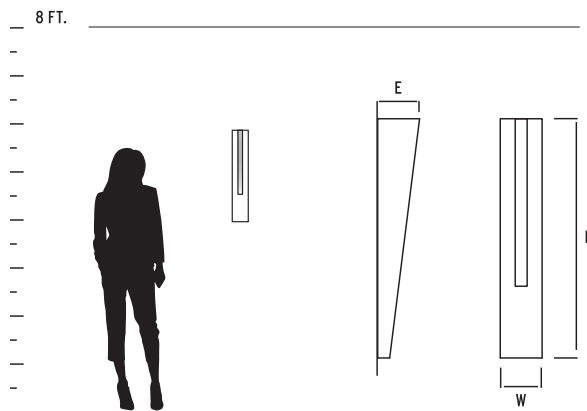

3-739-22

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------|----------------------------|------------------------------|----------------------------|---------------------------------|---------------|
| 3-739-XX | Matte White Acrylic | 16 Gray 22 Oiled Bronze | 3.5"(w) x 20"(h) x 3.5"(ext) | 1 x 11.9w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | |


2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Matte white polycarbonate diffuser is 1/16" thick. • Matte white acrylic lense • Unit mounts to deep 4"x4" junction box w/ single device mud ring.
- Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for wall mount applications. • Total luminaire power 15.3w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

KUBO OUTDOOR

LED

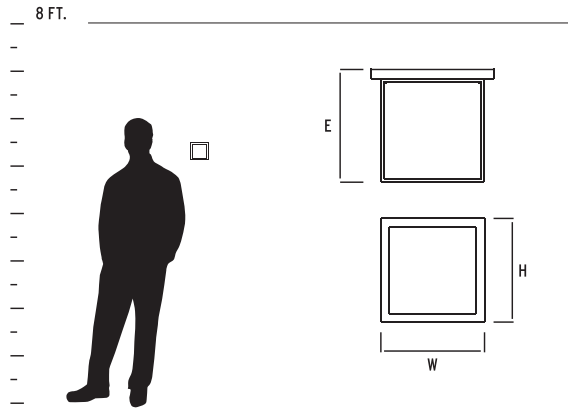

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------------------------|-------------------------------------|---|----------|---|
| 3-735-XX | 15 Black 16 Brushed Aluminum | 5.125"(w) x 5.125"(h) x 5.625"(ext) | 2 x 3w, 90CRI 3000k LED 210 Delivered Lumens | 110-277V |  |

GENERAL SPECIFICATIONS:

• Cast aluminum housing. • White frost glass diffuser is 1/16" thick. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications. • Approved for vertical mounting only. • Total luminaire power 4.7w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


LEDA OUTDOOR

LED

EM



3-713-222

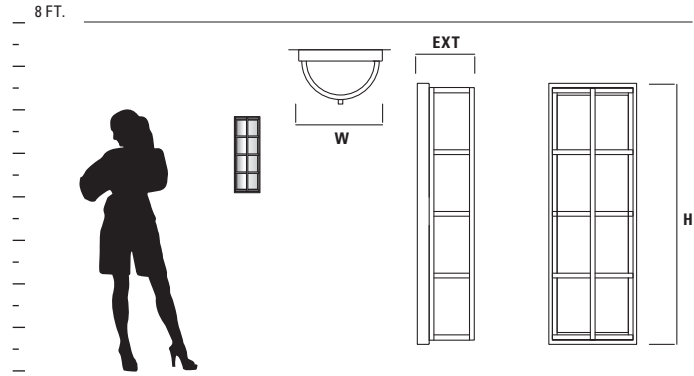

3-712-224

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | BALLAST | DRIVER | CERTIFICATION |
|------------------------------|------------------------|------------------------------------|-----------------------------------|----------------------------|---------|------------------------------------|---------------|
| 3-712-2XX small | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 7.25"(w) x 16.5"(h) x 4.75"(ext) | 1 x 10.1w, 90CRI 3000k LED | – | 120/277V 0-10V/Phase dimming | |
| 3-712-2XX-EM small | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 7.25"(w) x 16.5"(h) x 4.75"(ext) | 1 x 10.1w, 90CRI 3000k LED | – | 120/277V 0-10V/Phase dimming | |
| 3-713-2XX large | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 7.25"(w) x 21.75"(h) x 4.75"(ext) | 2 x 10.1w, 90CRI 3000k LED | – | 120/277V 0-10V/Phase dimming | |
| 3-713-2XX-EM large | Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 7.25"(w) x 21.75"(h) x 4.75"(ext) | 2 x 10.1w, 90CRI 3000k LED | – | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available for non EM LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

Stainless steel housing. • White acrylic diffuser is extruded 1/8" thick. • Unit mounts to 4" octagonal junction box. • Approved for wall mount application only. • Approved for vertical mounting only. • Total luminaire power 13w for 3-712-XX and 26w for 3-713-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


EMERGENCY BATTERY BACKUP MODELS (EM)

• ETL required 90 minute emergency battery run time • 32 hour recharge time.

MAGNETA OUTDOOR

ADA

LED

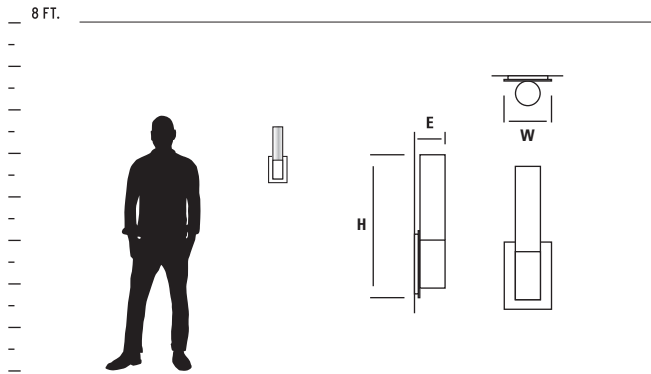

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|------------------|--|---------------------------------|----------------------------|---------------------------------|---------------|
| 3-728-XX | Matte Opal Glass | 15 Black 16 Gray 22 Oiled Bronze | 4.75"(w) x 14.5"(h) x 3.5"(ext) | 1 x 11.9w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing • Diffuser is 1/8" thick matte opal glass. • Unit mounts to deep 4" octagonal junction box. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Approved for wall mount application only. • Total luminaire power 15.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.


MAIA OUTDOOR


ADA







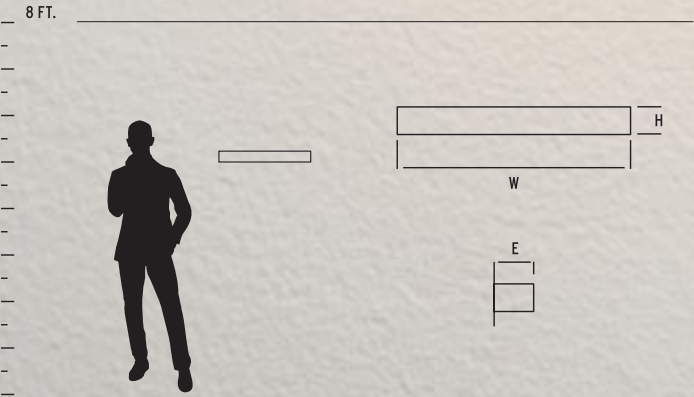

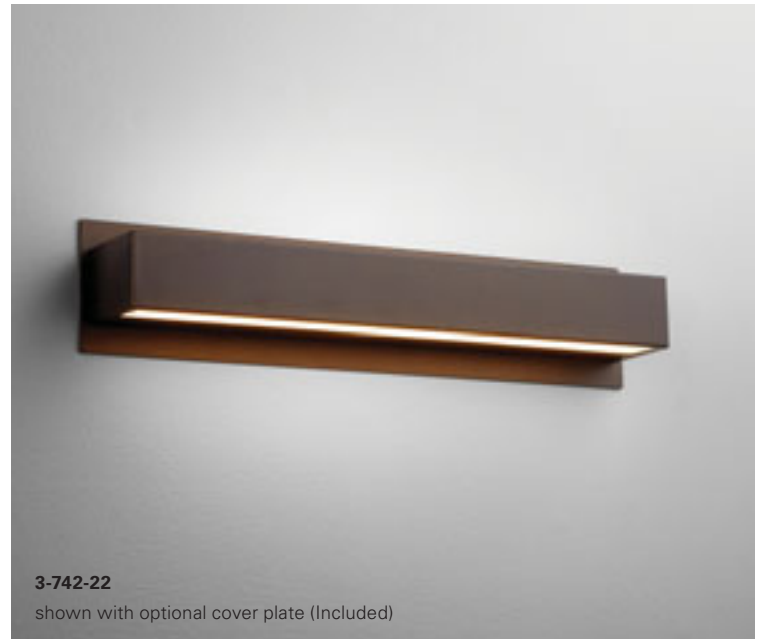LED



3-740-22
shown with optional cover plate (Included)





| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------------|----------------------------|---|----------------------------|---------------------------------|---|
| 3-740-XX small | Matte White Acrylic | 16 Gray 22 Oiled Bronze | 11"(w) x 5"(h) x 4"(ext) w/ optional cover plate | 1 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming |     |
| 3-742-XX large | Matte White Acrylic | 16 Gray 22 Oiled Bronze | 24"(w) x 5"(h) x 4"(ext) w/ optional cover plate | 2 x 11.9w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming |     |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Matte white polycarbonate diffuser • Unit mounts to deep 4" octagonal or deep 4"x4" junction box w/ single device mud ring. • Unit requires 2.5" deep junction box. • Driver mounts inside junction box. • Mounts to 4" octagonal junction box with optional cover plate. • Approved for vertical and horizontal wall mount applications.
- Total luminaire power 13w for 3-740-XX and 30.3 for 3-742-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

NITRO OUTDOOR

ADA


LED



3-725-15



3-725-24

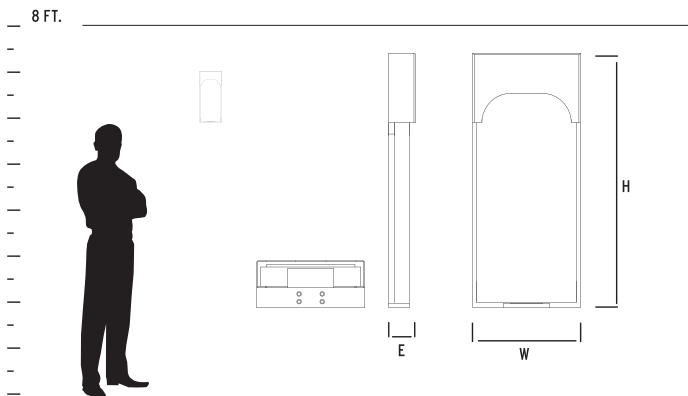

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|----------------------|-----------------------------|--------------------------------|---------------------------|--------------------|---------------|
| 3-725-XX | Clear Chiseled Glass | 15 Black 24 Satin Nickel | 5.5"(w) x 13"(h) x 2.375"(ext) | 1 x 7.7w, 90CRI 3000k LED | 120V Triac Dimming | |




GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Clear chiseled glass diffuser. • Unit mounts to deep 4" octagonal junction box. • Approved for wall mount application only. • Approved for vertical wall mounting applications. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

NOVA OUTDOOR




ADA

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|-----------------------|----------|-----------------------------------|-------------------------|--------------------|---|
| 3-707-15 | Clear Pinstripe Glass | 15 Black | 8.25"(w) x 11.75"(h) x 1.75"(ext) | 2 x 6w, 90CRI 3000k LED | 120V Triac Dimming |    |

GENERAL SPECIFICATIONS:


• Cast aluminum housing. • Clear Pinstripe Glass. • Unit mounts to deep 4" octagonal junction box. • Approved for wall mount application only. • Approved for vertical and horizontal applications. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.

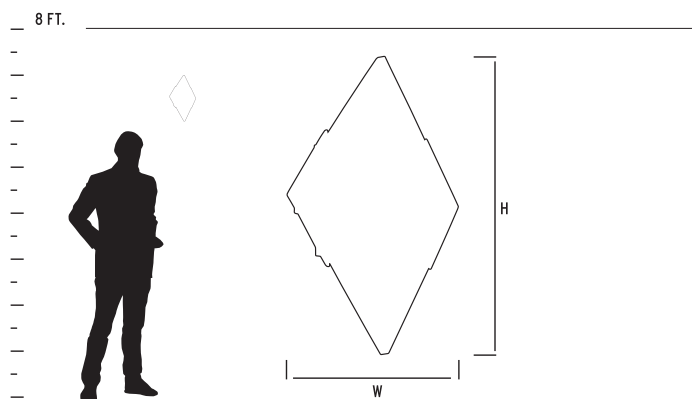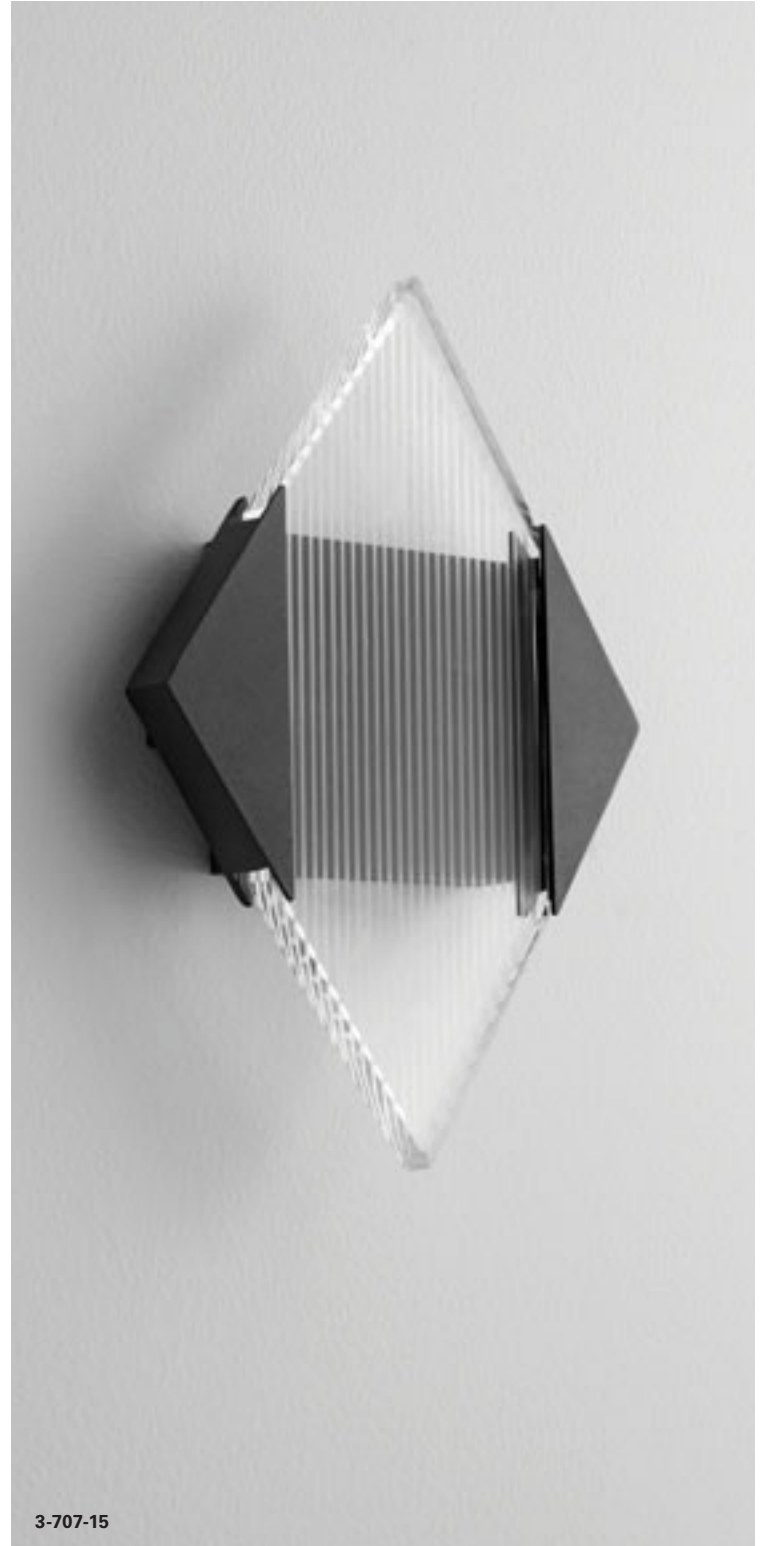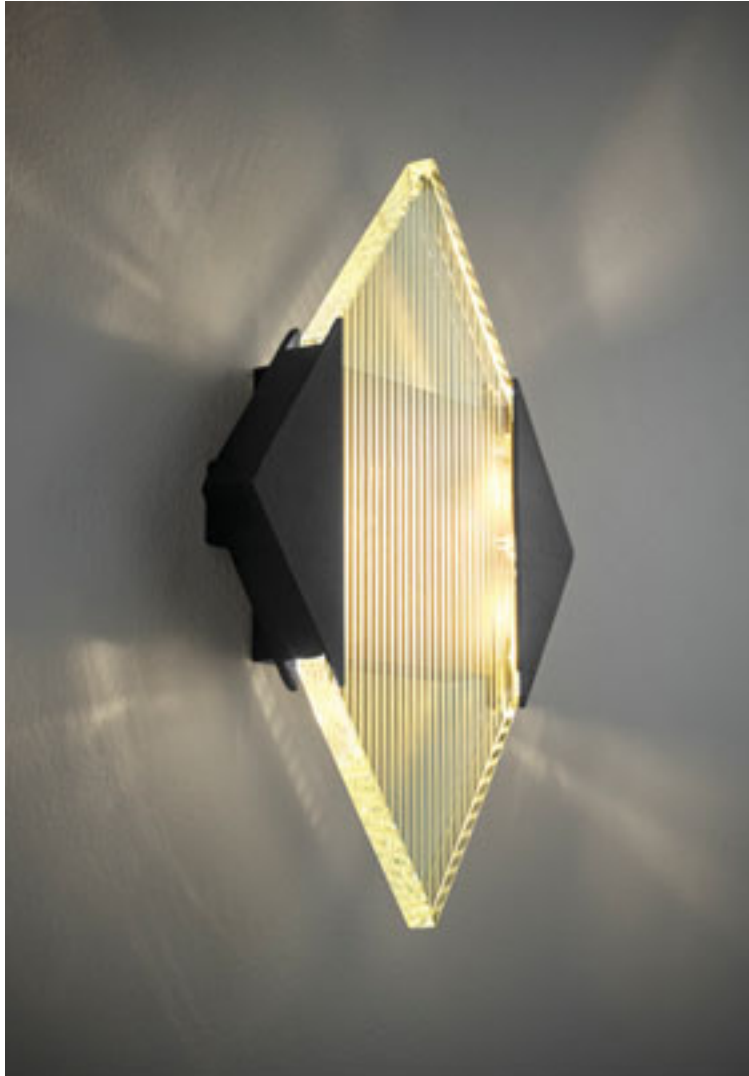

PAVO OUTDOOR

ADA

LED

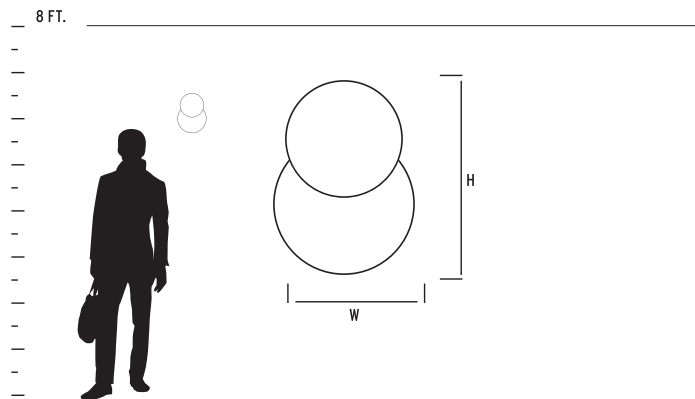


| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|-----------------------|----------|-------------------------------------|-------------------------|--------------------|---------------|
| 3-753-15 small | Clear Pinstripe Glass | 15 Black | 5.5"(w) x 6.25"(h) x 2.125"(ext) | 1 x 8w, 90CRI 3000k LED | 120V Triac Dimming | |
| 3-754-15 large | Clear Pinstripe Glass | 15 Black | 6.875"(w) x 8.375"(h) x 2.125"(ext) | 1 x 8w, 90CRI 3000k LED | 120V Triac Dimming | |

GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Clear Pinstripe Glass. • Unit mounts to deep 4" octagonal junction box. • Approved for wall mount application only. • Visit www.oxygenlighting.com for technical cut sheets, total luminaire and lumen information. • Oxygen reserves the right to modify designs at any time.


PILOT OUTDOOR

LED

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------------------|------------------------------------|---|----------|---|
| 3-732-XX | 15 Black 16 Brushed Aluminum | 5.125"(w) x 6.25"(h) x 5.125"(ext) | 2 x 3w, 3000k LED 327 Delivered Lumens | 110-277V |  |

GENERAL SPECIFICATIONS:

- Cast aluminum housing.
- Unit mounts to 4" octagonal junction box.
- Approved for wall mount applications.
- Approved for vertical mounting only.
- Can be rotated and mounted 180°.
- Total luminaire power 5w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

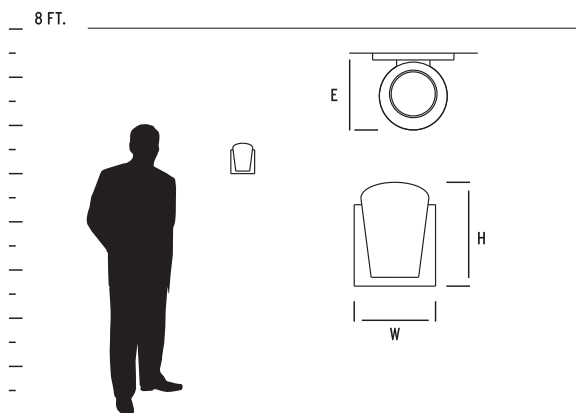


RAZZO OUTDOOR

LED




3-746-16

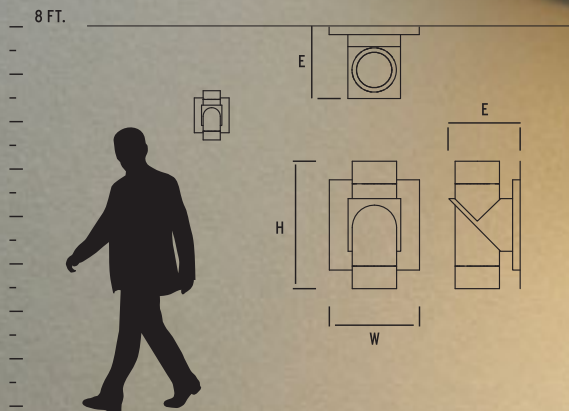



3-746-15
Shown mounted at 180°

| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------------------------|-----------------------------------|---|----------|---|
| 3-746-XX | 15 Black 16 Brushed Aluminum | 5.125"(w) x 6.25"(h) x 4.25"(ext) | 2 x 3w, 3000k LED 680 Delivered Lumens | 110-277V |  |

GENERAL SPECIFICATIONS:


• Cast aluminum housing. • Clear glass diffuser is 1/16" thick. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications. • Approved for vertical mounting only. • Can be rotated and mounted 180° • Total luminaire power 8.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

REALM OUTDOOR

LED



3-750-22

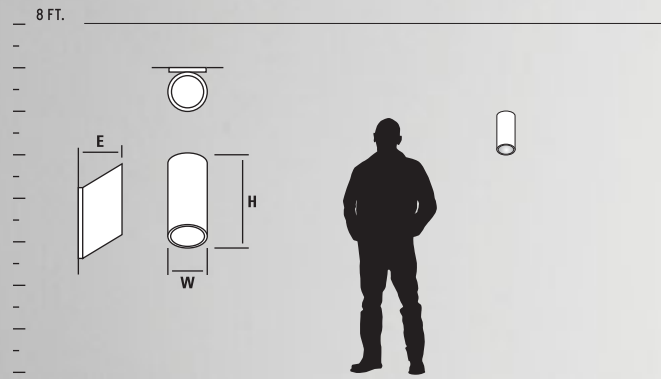

3-750-16

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------|----------------------------|----------------------------|----------------------------|---------------------------------|---------------|
| 3-750-XX | Frosted Glass | 16 Gray 22 Oiled Bronze | 5"(w) x 12"(h) x 5.5"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cULus wet |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com


GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Frosted glass lenses. • Unit mounts to 4" octagonal junction box. • Approved for wall mount application only. • Total luminaire power 26.2w.
- www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

REGIO OUTDOOR

ADA

LED

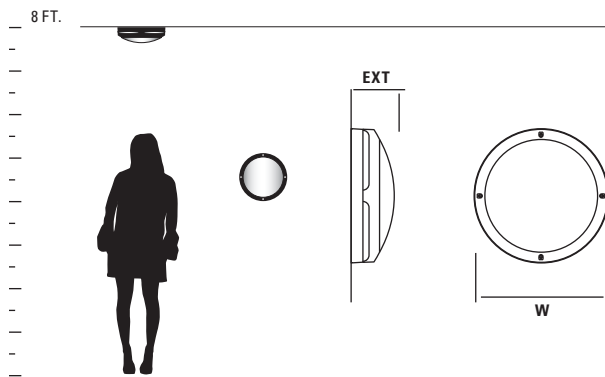

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------------------------|---------------------|---------------------|----------------------------|---------------------------------|---------------|
| 3-719-XX | Polished White Polycarbonate | 15 Black 16 Gray | 13"(w) x 4.25"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:




• Cast aluminum housing. • Injected molded polycarbonate diffuser. • Captive, stainless steel, tamper resistant hardware. • Vandal resistant construction. • Unit mounts to 4" octagonal junction box. • Approved for wall or ceiling mount applications. • Total luminaire power 26.2w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

RICKIE OUTDOOR

ADA

LED



| ITEM # | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|-----------------|---------------------------------|----------------------------------|---|----------|---|
| 3-747-XX | 15 Black 16 Brushed Aluminum | 6.25"(w) x 6.25"(h) x 2.25"(ext) | 8 x 1.5w, 3000k LED 616 Delivered Lumens | 110-277V |    |

GENERAL SPECIFICATIONS:

- Cast aluminum housing. • Clear glass diffuser. • Unit mounts to 4" octagonal junction box. • Approved for wall mount applications. • Total luminaire power 15.3w.
- Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

SCOPE OUTDOOR


LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|---------------|----------------------------|----------------------------|----------------------------|---------------------------------|---------------|
| 3-752-XX | Frosted Glass | 16 Gray 22 Oiled Bronze | 5"(w) x 12"(h) x 5.5"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cULus wet |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

- Cast aluminum housing.
- Frosted white lenses.
- Unit mounts to 4" octagonal junction box.
- Approved for wall mount application only.
- Total luminaire power 26.2w.
- Visit www.oxygenlighting.com for technical cut sheets.
- Oxygen reserves the right to modify designs at any time.

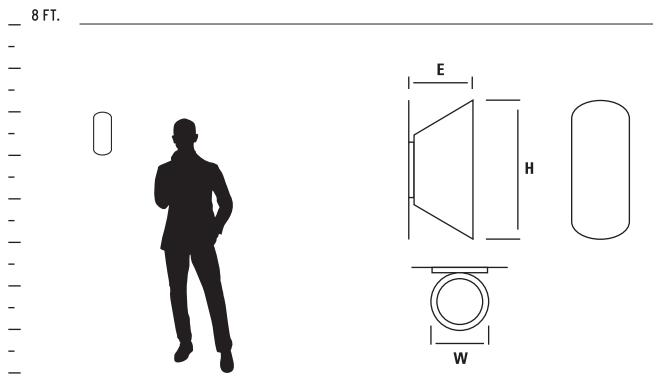

3-752-22



3-752-16

TELSHOR OUTDOOR

LED EM



3-711-224





| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|------------------------------|-----------------------|------------------------------------|-------------------------------|----------------------------|---------------------------------|--------------------------|
| 3-710-2XX small | 2 Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 7.25"(w) x 16.5"(h) x 5"(ext) | 1 x 10.1W, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cUL _{us} wet |
| 3-710-2XX-EM small | 2 Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 7.25"(w) x 16.5"(h) x 5"(ext) | 1 x 10.1W, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ETL _{us} wet EM |
| 3-711-2XX large | 2 Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 9"(w) x 21.75"(h) x 5"(ext) | 2 x 10.1W, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | cUL _{us} wet |
| 3-711-2XX-EM large | 2 Matte White Acrylic | 22 Oiled Bronze 24 Satin Nickel | 9"(w) x 21.75"(h) x 5"(ext) | 2 x 10.1W, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ETL _{us} wet EM |

2700k, 3500k, 4000k color temperatures also available for non EM LED models. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Stainless steel housing. • White acrylic diffuser is formed 1/8" thick. • Unit mounts to 4" octagonal junction box. • Approved for wall mount application only. • Approved for vertical mounting only. • Total luminaire power 13w for 3-710-XX and 26w for 3-711-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.




EMERGENCY BATTERY BACKUP MODELS (EM)

• ETL required 90 minute emergency battery run time • 32 hour recharge time.

TITAN OUTDOOR


ADA

LED

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|----------|----------------------------|---------------------------------|-------------------------------|---|--------------------|---|
| 3-708-XX | White Frost Glass Diffuser | 15 Black 16 Brushed Aluminum | 4.75"(w) x 4.75"(h) x 4"(ext) | 1 x 6w, 90CRI 3000k LED 236 Delivered Lumens | 120V Triac dimming |    |

GENERAL SPECIFICATIONS:


- Cast aluminum housing. • White frost glass diffuser is 1/16" thick. • Unit mounts to 4" octagonal junction box. • LED driver on board. • Approved for wall mount applications.
- Approved for vertical mounting only. • Can be rotated and mounted 180°. • Total luminaire power 6.1w. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.

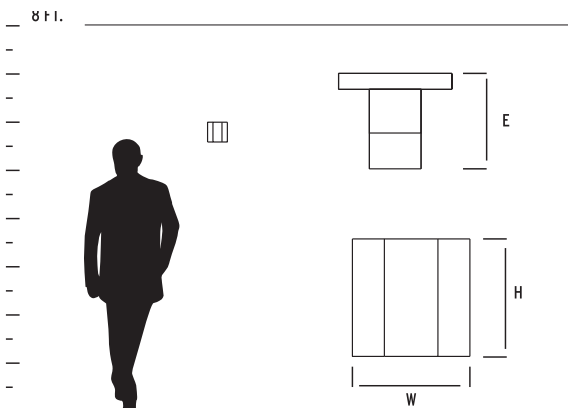

UNO OUTDOOR

ADA

LED

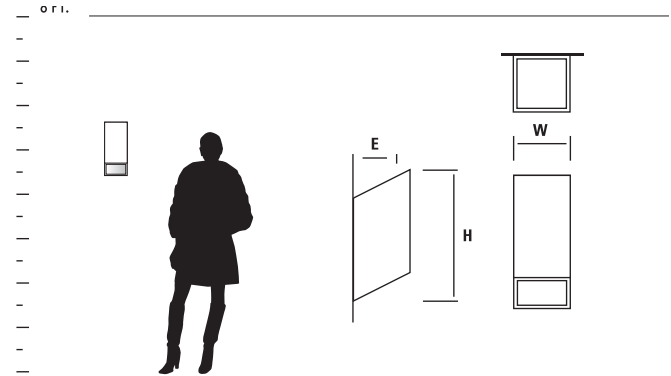

| ITEM # | DIFFUSER | FINISH | DIMENSIONS | LAMPING | DRIVER | CERTIFICATION |
|--------------------------|---------------|----------------------------|-------------------------------|----------------------------|---------------------------------|---------------------------|
| 3-700-XX small | Frosted Glass | 16 Gray 22 Oiled Bronze | 5.25"(w) x 9.25"(h) x 4"(ext) | 1 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | ADA COMPLIANT c UL US wet |
| 3-701-XX large | Frosted Glass | 16 Gray 22 Oiled Bronze | 6"(w) x 14"(h) x 6"(ext) | 2 x 10.1w, 90CRI 3000k LED | 120/277V 0-10V/Phase dimming | c UL US wet |

2700k, 3500k, 4000k color temperatures also available. Visit oxygenlighting.com

GENERAL SPECIFICATIONS:

• Cast aluminum housing. • Frosted glass lenses. • 3-700-XX mounts to 4" octagonal junction box. • 3-701-XX mounts to 4" octagonal junction box. • Approved for wall mount application only. • Total luminaire power 13.1w for 3-700-XX and 26.2w for 3-701-XX. • Visit www.oxygenlighting.com for technical cut sheets. • Oxygen reserves the right to modify designs at any time.



The image features several thick, expressive pink brush strokes on a white background. One large stroke curves from the top left towards the center. Another stroke curves from the top right towards the center. A third stroke is visible on the left side, extending from the middle towards the bottom. A small, textured pink dot is positioned above the word 'accessories'.

accessories

ACCESSORIES

GENERAL SPECIFICATIONS:

Multi-pendant canopies are available in assorted configurations that are compatible with the following pendant designs to create a stunning visual display.

• Cornet • Ellipse • Galaxy • Gratis • Idol • Liberty • Luna • Magneta • Magnum • Opus • Spindle • Spirit





POLISHED CHROME

- 3-8-6714 - 7 light - 20.75"(w) x 2.25"(h)
- 3-8-6514 - 5 light - 19"(w) x 2.25"(h) (shown)
- 3-8-6314 - 3 light - 13.125"(w) x 2.25"(h)



POLISHED CHROME

- 3-8-7514 - 5 light - 48"(l) x 5.5"(w) x 1.875"(h) (shown)
- 3-8-7314 - 3 light - 36"(l) x 5.5"(w) x 1.875"(h)
- 3-8-7214 - 2 light - 24"(l) x 5.5"(w) x 1.875"(h)



GUNMETAL

- 3-8-6718 - 7 light - 20.75"(w) x 2.25"(h) (shown)
- 3-8-6518 - 5 light - 19"(w) x 2.25"(h)
- 3-8-6318 - 3 light - 13.125"(w) x 2.25"(h)



GUNMETAL

- 3-8-7518 - 5 light - 48"(l) x 5.5"(w) x 1.875"(h)
- 3-8-7318 - 3 light - 36"(l) x 5.5"(w) x 1.875"(h) (shown)
- 3-8-7218 - 2 light - 24"(l) x 5.5"(w) x 1.875"(h)



SATIN NICKEL

- 3-8-6724 - 7 light - 20.75"(w) x 2.25"(h) (shown)
- 3-8-6524 - 5 light - 19"(w) x 2.25"(h)
- 3-8-6324 - 3 light - 13.125"(w) x 2.25"(h)



SATIN NICKEL

- 3-8-7524 - 5 light - 48"(l) x 5.5"(w) x 1.875"(h)
- 3-8-7324 - 3 light - 36"(l) x 5.5"(w) x 1.875"(h)
- 3-8-7224 - 2 light - 24"(l) x 5.5"(w) x 1.875"(h) (shown)



AGED BRASS

- 3-8-6740 - 7 light - 20.75"(w) x 2.25"(h)
- 3-8-6540 - 5 light - 19"(w) x 2.25"(h)
- 3-8-6340 - 3 light - 13.125"(w) x 2.25"(h) (shown)



AGED BRASS

- 3-8-7540 - 5 light - 48"(l) x 5.5"(w) x 1.875"(h) (shown)
- 3-8-7340 - 3 light - 36"(l) x 5.5"(w) x 1.875"(h)
- 3-8-7240 - 2 light - 24"(l) x 5.5"(w) x 1.875"(h)

ACCESSORIES

OPTIONAL 1/2" DOWNRODS

These downrods allow you to choose how far your fan will hang from the ceiling. We offer a complete line of extension rods to match oxygen finishes. Remember your fan should always hang at least 7 feet above the floor.

| DOWNROD FINISH | 12" | 18" | 24" | 36" | 48" | 60" | 72" |
|-----------------|----------|----------|----------|----------|----------|----------|----------|
| White | 3-6-1206 | 3-6-1806 | 3-6-2406 | 3-6-3606 | 3-6-4806 | 3-6-6006 | 3-6-7206 |
| Black | 3-6-1215 | 3-6-1815 | 3-6-2415 | 3-6-3615 | 3-6-4815 | 3-6-6015 | 3-6-7215 |
| Polished Nickel | 3-6-1220 | 3-6-1820 | 3-6-2420 | 3-6-3620 | 3-6-4820 | 3-6-6020 | 3-6-7220 |
| Oiled Bronze | 3-6-1222 | 3-6-1822 | 3-6-2422 | 3-6-3622 | 3-6-4822 | 3-6-6022 | 3-6-7222 |
| Satin Nickel | 3-6-1224 | 3-6-1824 | 3-6-2424 | 3-6-3624 | 3-6-4824 | 3-6-6024 | 3-6-7224 |



DIFFUSERS



white opal glass



matte white acrylic




smoked ombre glass



coffee ombre glass




clear bubble acrylic



clear glass



white glass



mirrored glass



clear bubble glass

FINISHES



6 - white



14 - polished chrome



15 - black




16 - gray



18 - gunmetal



20 - polished nickel

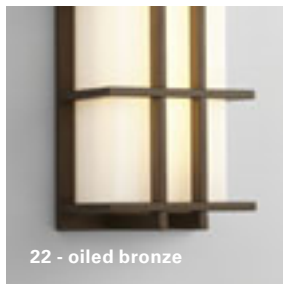

22 - oiled bronze




24 - satin nickel



25 - satin copper




30 - silver graphite



40 - aged brass



50 - industrial brass

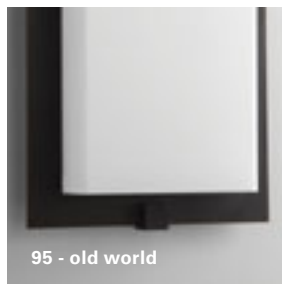

95 - old world

INDEX

| item #. pg # | item #. pg # | item #. pg # | item #. pg # |
|----------------------|----------------------|----------------------|----------------------|
| 2-5104-24 112 | 3-103-15..... 25 | 3-111-15 21 | 3-308-124 203 |
| 2-5105-14 112 | 3-103-20 25 | 3-111-24 21 | 3-308-215 203 |
| 2-5105-24 112 | 3-103-22 25 | 3-111-6 21 | 3-308-220..... 203 |
| 2-5106-14 112 | 3-103-24 25 | 3-112-15..... 31 | 3-308-224..... 203 |
| 2-5106-24 112 | 3-103-6 25 | 3-112-24..... 31 | 3-309-115..... 203 |
| 2-5121-114..... 125 | 3-104-15..... 45 | 3-112-40..... 31 | 3-309-120 203 |
| 2-5121-124..... 125 | 3-104-20 45 | 3-112-6..... 31 | 3-309-124 203 |
| 2-5131-14..... 127 | 3-104-22 45 | 3-113-15..... 29 | 3-309-215 203 |
| 2-5131-24 127 | 3-104-24 45 | 3-113-1540..... 29 | 3-309-220..... 203 |
| 2-5132-14 127 | 3-104-6 45 | 3-113-24..... 29 | 3-309-224..... 203 |
| 2-5134-24 119 | 3-105-022 23 | 3-113-640..... 29 | 3-332-15 186 |
| 2-5156-124 166 | 3-105-024 23 | 3-114-15..... 43 | 3-332-22 186 |
| 2-5170-224 109 | 3-105-06 23 | 3-114-24..... 43 | 3-332-24 186 |
| 2-6107-24 81 | 3-106-22 41 | 3-114-6..... 43 | 3-332-6 186 |
| 2-6138-6 206 | 3-106-24 41 | 3-115-15..... 49 | 3-333-15 186 |
| 2-6139-6 206 | 3-106-6 41 | 3-115-24..... 49 | 3-333-22 186 |
| 2-699-24 193 | 3-107-15..... 47 | 3-115-640..... 49 | 3-333-24 186 |
| 3-100-15 27 | 3-107-24..... 47 | 3-20-1550 82 | 3-333-6 186 |
| 3-100-20 27 | 3-107-6..... 47 | 3-20-650 82 | 3-334-15 186 |
| 3-100-22 27 | 3-108-15..... 33 | 3-21-1550 82 | 3-334-22 186 |
| 3-100-24 27 | 3-108-24 33 | 3-21-650 82 | 3-334-24 186 |
| 3-100-6 27 | 3-108-40 33 | 3-22-15 71 | 3-334-6 186 |
| 3-101-15 37 | 3-108-6 33 | 3-22-6 71 | 3-353-115..... 191 |
| 3-101-20..... 37 | 3-1084-15 31 | 3-23-15 71 | 3-353-120 191 |
| 3-101-22..... 37 | 3-1084-24 31 | 3-23-6 71 | 3-353-124 191 |
| 3-101-24..... 37 | 3-1084-40 31 | 3-24-15 55 | 3-353-215 191 |
| 3-101-40..... 37 | 3-109-15..... 35 | 3-24-1540 69 | 3-353-220..... 191 |
| 3-101-6..... 37 | 3-109-22 35 | 3-24-2440..... 69 | 3-353-224..... 191 |
| 3-102-15..... 39 | 3-109-24 35 | 3-24-40 55 | 3-354-115..... 191 |
| 3-102-20 39 | 3-109-40 35 | 3-24-5224..... 69 | 3-354-120 191 |
| 3-102-22 39 | 3-109-6 35 | 3-25-15 84 | 3-354-124 191 |
| 3-102-24 39 | 3-110-15..... 19 | 3-28-1540 54 | 3-354-215 191 |
| 3-102-40 39 | 3-110-24..... 19 | 3-308-115..... 203 | 3-354-220..... 191 |
| 3-102-6 39 | 3-110-6..... 19 | 3-308-120 203 | 3-354-224..... 191 |

| item #. pg # | item #. pg # | item #. pg # | item #. pg # |
|----------------------|----------------------|------------------------|----------------------|
| 3-36-1540 69 | 3-5013-20 118 | 3-516-24 159 | 3-526-24 113 |
| 3-36-2440 69 | 3-5013-24 118 | 3-516-40 159 | 3-527-20 176 |
| 3-36-5224 69 | 3-5020-15 177 | 3-517-14 168 | 3-527-22 176 |
| 3-48-1540 69 | 3-5020-24 177 | 3-517-24 168 | 3-527-24 176 |
| 3-48-2440 69 | 3-5020-40 177 | 3-518-124 156 | 3-528-124 155 |
| 3-48-5224 69 | 3-5021-15 130 | 3-518-125 156 | 3-528-140 155 |
| 3-50-1550 183 | 3-5021-24 130 | 3-518-140 156 | 3-528-24 155 |
| 3-50-650 183 | 3-5022-15 130 | 3-518-24 156 | 3-528-40 155 |
| 3-500-18 174 | 3-5022-24 130 | 3-518-25 156 | 3-53-1550 133 |
| 3-500-40 174 | 3-5023-15 130 | 3-518-40 156 | 3-53-650 133 |
| 3-5000-15 173 | 3-5023-24 130 | 3-519-20 175 | 3-530-22 181 |
| 3-5000-20 173 | 3-504-14 169 | 3-519-24 175 | 3-530-24 181 |
| 3-5000-24 173 | 3-504-15 169 | 3-52-1550 183 | 3-530-40 181 |
| 3-5000-40 173 | 3-504-24 169 | 3-52-650 183 | 3-532-22 136 |
| 3-5001-15 128 | 3-504-25 169 | 3-520-14 158 | 3-532-24 136 |
| 3-5001-20 128 | 3-504-40 169 | 3-520-40 158 | 3-532-40 136 |
| 3-5001-24 128 | 3-509-18 145 | 3-521-14 142 | 3-533-22 111 |
| 3-5002-15 128 | 3-509-24 145 | 3-521-22 142 | 3-533-24 111 |
| 3-5002-20 128 | 3-509-40 145 | 3-521-24 142 | 3-534-20 126 |
| 3-5002-24 128 | 3-51-1550 183 | 3-521-40 142 | 3-534-24 126 |
| 3-5003-15 128 | 3-51-650 183 | 3-522-24 167 | 3-535-14 151 |
| 3-5003-20 128 | 3-511-14 153 | 3-522-24-EM 167 | 3-535-24 151 |
| 3-5003-24 128 | 3-511-22 153 | 3-523-224 165 | 3-535-25 151 |
| 3-5010-15 149 | 3-511-24 153 | 3-523-224-EM 165 | 3-535-40 151 |
| 3-5010-20 149 | 3-511-40 153 | 3-523-295 165 | 3-536-15 109 |
| 3-5010-24 149 | 3-512-24 144 | 3-523-295-EM 165 | 3-536-22 109 |
| 3-5010-40 149 | 3-513-24 144 | 3-524-14 113 | 3-536-24 109 |
| 3-5011-15 118 | 3-514-14 143 | 3-524-22 113 | 3-536-40 109 |
| 3-5011-20 118 | 3-514-22 143 | 3-524-24 113 | 3-537-15 109 |
| 3-5011-24 118 | 3-514-24 143 | 3-525-14 113 | 3-537-22 109 |
| 3-5012-15 118 | 3-514-40 143 | 3-525-22 113 | 3-537-24 109 |
| 3-5012-20 118 | 3-515-24 151 | 3-525-24 113 | 3-537-40 109 |
| 3-5012-24 118 | 3-515-25 151 | 3-526-14 113 | 3-538-22 162 |
| 3-5013-15 118 | 3-515-40 151 | 3-526-22 113 | 3-538-24 162 |

INDEX

| item #. pg # | item #. pg # | item #. pg # | item #. pg # |
|--------------------------|----------------------|----------------------|----------------------|
| 3-539-22 163 | 3-555-40 109 | 3-570-24 137 | 3-6-2422 248 |
| 3-539-24 163 | 3-556-14 180 | 3-571-15..... 108 | 3-6-2424 248 |
| 3-54-1550 133 | 3-556-22 180 | 3-571-20 108 | 3-6-3606 248 |
| 3-54-650 133 | 3-556-24 180 | 3-571-24 108 | 3-6-3615 248 |
| 3-540-14 164 | 3-556-40 180 | 3-575-20 114 | 3-6-3620 248 |
| 3-540-24 164 | 3-557-14 131 | 3-575-24 114 | 3-6-3622 248 |
| 3-540-40 164 | 3-557-22 131 | 3-582-24 117 | 3-6-3624 248 |
| 3-541-20 157 | 3-557-24 131 | 3-584-1540 161 | 3-6-4806 248 |
| 3-541-24 157 | 3-557-40 131 | 3-587-124 140 | 3-6-4815 248 |
| 3-542-20 123 | 3-559-14 131 | 3-587-195 140 | 3-6-4820 248 |
| 3-542-24 123 | 3-559-22 131 | 3-587-224 140 | 3-6-4822 248 |
| 3-543-14 124 | 3-559-24 131 | 3-587-295 140 | 3-6-4824 248 |
| 3-543-24 124 | 3-559-40 131 | 3-588-124 121 | 3-6-6006 248 |
| 3-544-24 119 | 3-560-22 179 | 3-588-140 121 | 3-6-6015..... 248 |
| 3-545-20 154 | 3-560-24 179 | 3-588-24 121 | 3-6-6020 248 |
| 3-547-20 116 | 3-560-40 179 | 3-588-40 121 | 3-6-6022 248 |
| 3-547-20-BP220 116 | 3-563-114..... 170 | 3-589-124 171 | 3-6-6024 248 |
| 3-547-24 116 | 3-563-124 170 | 3-590-124 120 | 3-6-7206 248 |
| 3-547-24-BP224 116 | 3-563-214 170 | 3-590-140 120 | 3-6-7215 248 |
| 3-549-20 116 | 3-563-224 170 | 3-590-24 120 | 3-6-7220 248 |
| 3-549-20-BP420 116 | 3-564-122 148 | 3-590-40 120 | 3-6-7222 248 |
| 3-549-24 116 | 3-564-124 148 | 3-6-1206 248 | 3-6-7224 248 |
| 3-549-24-BP424 116 | 3-564-140 148 | 3-6-1215 248 | 3-60-15 67 |
| 3-551-15..... 139 | 3-564-222 148 | 3-6-1220 248 | 3-60-30 67 |
| 3-551-20 139 | 3-564-224 148 | 3-6-1222 248 | 3-60-6 67 |
| 3-551-24 139 | 3-564-240 148 | 3-6-1224 248 | 3-600-22 200 |
| 3-552-20 115 | 3-567-115..... 147 | 3-6-1806 248 | 3-600-24 200 |
| 3-552-24 115 | 3-567-120 147 | 3-6-1815 248 | 3-600-40 200 |
| 3-553-15 141 | 3-567-124 147 | 3-6-1820 248 | 3-603-24 61 |
| 3-553-24 141 | 3-567-215 147 | 3-6-1822 248 | 3-603-40 61 |
| 3-553-40 141 | 3-567-220 147 | 3-6-1824 248 | 3-605-24 56 |
| 3-555-15 109 | 3-567-224 147 | 3-6-2406 248 | 3-605-40 56 |
| 3-555-22 109 | 3-569-20 129 | 3-6-2415 248 | 3-607-124 85 |
| 3-555-24 109 | 3-569-24 129 | 3-6-2420 248 | 3-607-140 85 |

| item #. pg # | item #. pg # | item #. pg # | item #. pg # |
|-----------------------|-----------------------|----------------------|----------------------|
| 3-607-24 85 | 3-619-40 198 | 3-63-15 95 | 3-651-1314..... 68 |
| 3-607-40 85 | 3-619-40-EM 199 | 3-63-24 95 | 3-651-14..... 68 |
| 3-609-124 76 | 3-62-15 95 | 3-63-40 95 | 3-651-2018..... 68 |
| 3-609-14 76 | 3-62-24 95 | 3-63-6 95 | 3-652-1314 80 |
| 3-609-1414 76 | 3-62-40 95 | 3-635-14 77 | 3-652-14 80 |
| 3-61-15..... 67 | 3-62-6 95 | 3-635-24 77 | 3-652-2018 80 |
| 3-61-30 67 | 3-620-14 198 | 3-636-24 53 | 3-653-114..... 86 |
| 3-61-6..... 67 | 3-620-14-EM 199 | 3-636-40 53 | 3-653-124 86 |
| 3-610-22 204 | 3-620-15 198 | 3-637-24 53 | 3-653-14 86 |
| 3-610-24 204 | 3-620-15-EM 199 | 3-637-40 53 | 3-653-140 86 |
| 3-610-40 204 | 3-620-22 198 | 3-639-24 73 | 3-653-24 86 |
| 3-614-1540 103 | 3-620-22-EM 199 | 3-64-15 66 | 3-653-40 86 |
| 3-614-1624 103 | 3-620-24 198 | 3-64-24 66 | 3-654-114..... 93 |
| 3-6140-15 63 | 3-620-24-EM 199 | 3-64-40 66 | 3-654-124 93 |
| 3-6140-24 63 | 3-620-40 198 | 3-64-6 66 | 3-654-125 93 |
| 3-6141-15..... 63 | 3-620-40-EM 199 | 3-640-24 73 | 3-654-14 93 |
| 3-6141-24 63 | 3-6202-22 96 | 3-641-1540 72 | 3-654-140 93 |
| 3-6142-24 52 | 3-6202-24 96 | 3-641-1624 72 | 3-654-24 93 |
| 3-6142-40 52 | 3-6202-25 96 | 3-644-15 190 | 3-654-25 93 |
| 3-6143-24 52 | 3-6203-22 104 | 3-644-22 190 | 3-654-40 93 |
| 3-6143-40 52 | 3-6203-24 104 | 3-644-24 190 | 3-656-1314 98 |
| 3-618-14 198 | 3-622-15 194 | 3-644-6 190 | 3-656-14 98 |
| 3-618-15 198 | 3-622-24 194 | 3-645-15 190 | 3-656-2018 98 |
| 3-618-22 198 | 3-623-14 194 | 3-645-22 190 | 3-657-15 60 |
| 3-618-24 198 | 3-623-14-EM 195 | 3-645-24 190 | 3-657-24 60 |
| 3-618-40 198 | 3-623-15 194 | 3-645-6 190 | 3-657-40 60 |
| 3-619-14 198 | 3-623-24 194 | 3-646-1540 97 | 3-66-15 101 |
| 3-619-14-EM..... 199 | 3-623-24-EM 195 | 3-647-1540 97 | 3-66-24 101 |
| 3-619-15 198 | 3-624-14 194 | 3-648-6 206 | 3-66-40 101 |
| 3-619-15-EM..... 199 | 3-624-24 194 | 3-649-6 206 | 3-66-6 101 |
| 3-619-22 198 | 3-625-24 194 | 3-65-15 66 | 3-662-15 187 |
| 3-619-22-EM 199 | 3-625-24-EM 195 | 3-65-24 66 | 3-662-20 187 |
| 3-619-24 198 | 3-626-14 194 | 3-65-40 66 | 3-662-24 187 |
| 3-619-24-EM 199 | 3-626-24 194 | 3-65-6 66 | 3-663-1540 87 |

INDEX

| item #. pg # | item #. pg # | item #. pg # | item #. pg # |
|----------------------|-----------------------|-----------------------|------------------------|
| 3-663-1624 87 | 3-674-40..... 94 | 3-69-15 99 | 3-702-16 217 |
| 3-667-115..... 75 | 3-677-115..... 75 | 3-69-24 99 | 3-702-22 217 |
| 3-667-120 75 | 3-677-120 75 | 3-69-40 99 | 3-703-16 217 |
| 3-667-124 75 | 3-677-124 75 | 3-69-6 99 | 3-703-22 217 |
| 3-667-215 75 | 3-677-215 75 | 3-690-15 102 | 3-707-15 231 |
| 3-667-220 75 | 3-677-220 75 | 3-690-24 102 | 3-708-15 242 |
| 3-667-224 75 | 3-677-224 75 | 3-690-40 102 | 3-708-16 242 |
| 3-668-115..... 75 | 3-678-115..... 75 | 3-6900-15 89 | 3-710-222 241 |
| 3-668-120 75 | 3-678-120 75 | 3-6900-24 89 | 3-710-222-EM 241 |
| 3-668-124 75 | 3-678-124 75 | 3-6900-40 89 | 3-710-224 241 |
| 3-668-215 75 | 3-678-215 75 | 3-6901-15 89 | 3-710-224-EM 241 |
| 3-668-220 75 | 3-678-220 75 | 3-6901-24 89 | 3-711-222 241 |
| 3-668-224 75 | 3-678-224 75 | 3-6901-40 89 | 3-711-222-EM 241 |
| 3-67-15 101 | 3-68-15 99 | 3-6902-15 89 | 3-711-224 241 |
| 3-67-24 101 | 3-68-24 99 | 3-6902-24 89 | 3-711-224-EM 241 |
| 3-67-40 101 | 3-68-40 99 | 3-6902-40 89 | 3-712-222 226 |
| 3-67-6 101 | 3-68-6 99 | 3-6903-15 89 | 3-712-222-EM 226 |
| 3-670-20 83 | 3-680-15 91 | 3-6903-24 89 | 3-712-224 226 |
| 3-670-22 83 | 3-680-24 91 | 3-6903-40 89 | 3-712-224-EM 226 |
| 3-670-24 83 | 3-680-40 91 | 3-691-15 102 | 3-713-222 226 |
| 3-670-40 83 | 3-681-15 91 | 3-691-24 102 | 3-713-222-EM 226 |
| 3-671-20 83 | 3-681-24 91 | 3-691-40 102 | 3-713-224 226 |
| 3-671-22 83 | 3-681-40 91 | 3-694-24 189 | 3-713-224-EM 226 |
| 3-671-24 83 | 3-683-24 197 | 3-694-24-EM 189 | 3-719-15 237 |
| 3-671-40 83 | 3-683-24-EM 197 | 3-695-24 189 | 3-719-16 237 |
| 3-672-20 83 | 3-683-40 197 | 3-695-24-EM 189 | 3-720-16 219 |
| 3-672-22 83 | 3-683-40-EM 197 | 3-696-24 57 | 3-720-22 219 |
| 3-672-24 83 | 3-684-1540 59 | 3-696-40 57 | 3-721-16 219 |
| 3-672-40 83 | 3-685-1540 59 | 3-697-24 57 | 3-721-22 219 |
| 3-673-20 83 | 3-686-1540 92 | 3-697-40 57 | 3-722-15 210 |
| 3-673-22 83 | 3-689-24 193 | 3-700-16 243 | 3-723-15 210 |
| 3-673-24 83 | 3-689-24-EM 193 | 3-700-22 243 | 3-724-15 210 |
| 3-673-40 83 | 3-689-40 193 | 3-701-16 243 | 3-725-15 230 |
| 3-674-24 94 | 3-689-40-EM 193 | 3-701-22 243 | 3-725-24 230 |

| item #. pg # | item #. pg # | item #. pg # | item #. pg # |
|----------------------|----------------------|-----------------------------|------------------------|
| 3-726-16 214 | 3-747-15 238 | 3-8-7318 247 | 32-631-15 207 |
| 3-726-22 214 | 3-747-16 238 | 3-8-7324 247 | 32-631-24 207 |
| 3-727-16 214 | 3-748-15 211 | 3-8-7340 247 | 32-631-40 207 |
| 3-727-22 214 | 3-748-16 211 | 3-8-7514 247 | 32-632-15 105 |
| 3-728-15 227 | 3-750-16 236 | 3-8-7518 247 | 32-632-20 105 |
| 3-728-16 227 | 3-750-22 236 | 3-8-7524 247 | 32-632-24 105 |
| 3-728-22 227 | 3-752-16 239 | 3-8-7540 247 | 32-633-15 105 |
| 3-730-16 213 | 3-752-22 239 | 3-9-100 27 | 32-633-20 105 |
| 3-730-22 213 | 3-753-15 232 | 3-9-101 37, 39 | 32-633-24 105 |
| 3-731-16 213 | 3-754-15 232 | 3-9-102 25, 45 | 32-642-15 79 |
| 3-731-22 213 | 3-755-15 221 | 3-9-108-15 31 | 32-642-20 79 |
| 3-732-15 233 | 3-756-15 221 | 3-9-108-24 31 | 32-642-24 79 |
| 3-732-16 233 | 3-757-15 215 | 3-9-108-40 31 | 32-664-24 188 |
| 3-733-15 212 | 3-758-15 215 | 3-9-108-6 31 | 32-665-24 188 |
| 3-733-16 212 | 3-8-61306 23 | 3-9-109-15 35 | 32-665-24-EM 188 |
| 3-734-15 223 | 3-8-61322 23 | 3-9-109-22 35 | |
| 3-734-16 223 | 3-8-61324 23 | 3-9-109-24 35 | |
| 3-735-15 225 | 3-8-6314 247 | 3-9-109-40 35 | |
| 3-735-16 225 | 3-8-6318 247 | 3-9-109-6 35 | |
| 3-736-16 218 | 3-8-6324 247 | 3-9-110-15 19, 21, 49 | |
| 3-736-22 218 | 3-8-6340 247 | 3-9-110-24 19, 21, 49 | |
| 3-737-16 218 | 3-8-6514 247 | 3-9-110-40 49 | |
| 3-737-22 218 | 3-8-6518 247 | 3-9-110-6 19, 21 | |
| 3-739-16 224 | 3-8-6524 247 | 32-601-20 201 | |
| 3-739-22 224 | 3-8-6540 247 | 32-601-20-EM 201 | |
| 3-740-16 229 | 3-8-6714 247 | 32-601-24 201 | |
| 3-740-22 229 | 3-8-6718 247 | 32-601-24-EM 201 | |
| 3-742-16 229 | 3-8-6724 247 | 32-601-40 201 | |
| 3-742-22 229 | 3-8-6740 247 | 32-601-40-EM 201 | |
| 3-743-15 222 | 3-8-7214 247 | 32-612-20 205 | |
| 3-744-15 222 | 3-8-7218 247 | 32-612-40 205 | |
| 3-745-15 222 | 3-8-7224 247 | 32-630-15 207 | |
| 3-746-15 235 | 3-8-7240 247 | 32-630-24 207 | |
| 3-746-16 235 | 3-8-7314 247 | 32-630-40 207 | |

2020-21 ORDERING INFORMATION

phone: 877.607.0202

fax: 877.607.0203

email: customersupport@oxygenlighting.com

HOW TO ORDER

Orders are placed with authorized Oxygen sales representatives.

WAREHOUSE/ORDERING HOURS

Warehouse operations are open from 8:00am - 5:30pm Central Standard Time Monday through Friday.

PRICES

Buyer agrees to pay Company's established prices in effect on date of shipment if shipment is from other persons or firms, or on date of delivery if delivered from Company's stock. Prices are F.O.B. shipping point. Where transportation charges are expressly included, the same are based on present rates, and are subject to adjustment for any increase or decrease in effect at time of shipment. Any direct tax, including sales or use tax, imposed by law with respect to the sale or manufacture of any merchandise sold is to be added.

TERMS

All invoices are due and payable on a net 30-day basis from invoice date unless otherwise stated on the invoice. All past due invoices arising hereunder or otherwise owing to Company by Buyer shall bear interest at the maximum rate per annum provided by law, but in no event any rate in excess of that permitted by law.

CREDIT

All sales are subject to approval by the credit department of Company. If the credit rating of Buyer becomes unsatisfactory in the opinion of the credit department of Company prior to delivery of the merchandise covered by any order, the sale may be cancelled by Company. If Buyer fails to fulfill any terms of the purchase agreed upon in connection with this or any other order, Company may defer delivery until compliance therewith is made, or at its option may cancel any sale. For credit approval of new accounts, a completed and signed Company credit application must be in our possession before credit verification can begin. New accounts normally take 48 hours to process. Company uses the services of Dun & Bradstreet and other credit reporting companies for credit analysis. We report delinquent accounts to those companies. We fill orders only after credit approval. Active accounts will be credit determined the same day the order is received. Orders for past due accounts are not shipped until the account status is current.

DELIVERY

Company shall not be responsible for any delay or failure to make delivery which is occasioned by causes beyond its control, including but not restricted to fires, floods, strikes, labor disputes, accidents, embargoes, delays in transportation, fuel, material or labor shortages, failure to obtain delivery from manufacturers or subcontractors, any ruling, regulation or law of any government bureau or agency, or by any Act of God. Delays so caused shall not release Buyer from his obligation to accept and pay for goods. Company's responsibility ceases upon delivery of the merchandise to the carrier.

SHIPPING POINT FOR ALL PURPOSES

All shipments are FOB Company's warehouse, in Fort Worth, Tarrant County, Texas.

SHIPPING METHOD AND CHARGES

Company ships via the least expensive, not necessarily the fastest, carriers. If Buyer has a preferred carrier and wishes to pay the freight charges directly to the carrier, please provide your account number for the carrier of your choice. For basic ground transportation services, the Buyer may be asked to pay a premium for custom selected carriers. Buyer will be required to pay the entire Freight Services charge for any shipments using expedited ground transport or air transport services. All orders are shipped Prepaid and Add, unless the Customer requests to be billed Third Party. For orders of \$500 or more: Freight charges for standard LTL commercial delivery or parcel delivery will be equal to 10% of the total order amount for shipments in the USA. If the invoice is paid within its dating Terms, the customer may deduct the Freight charges. For orders less than \$500: Freight charges for Standard LTL commercial delivery or parcel delivery will be equal to 10% of the total order amount for shipments in the USA. Any shipment outside the USA, Buyer should contact Company's Customer Service Department for a freight quote. If any items are backordered, they will also be billed at the same freight rate as the original order, when they ship. Company contracts with LTL Freight carriers for standard commercial delivery only. Residential deliveries or accessorial services from LTL Carriers will incur additional charges that are in addition to the freight rates stated above. If you advise us that you need such services when you place your order, we will prepay for the services and add them to your invoice. Otherwise, the freight carrier will bill you directly for such additional services. Parcel shipments (such as UPS) will not incur additional charges for residential delivery or accessorial services.

SHORTAGE CLAIMS

Any claim for shortage must be made to Company within 3 days of delivery.

FREIGHT CLAIMS

We assure that products are in good condition prior to packing and shipping. Company is not responsible for shipments after they leave our warehouse. The carrier signs for acceptance at that time. Buyers must examine all arriving shipments for evidence of damage or breakage, and must refuse acceptance or file a claim with the carrier for compensation. UNDER NO CIRCUMSTANCES SHALL OXYGEN BE RESPONSIBLE FOR DAMAGE IN U.P.S./FED EX SHIPMENTS. All shipments are FOB Company's warehouse in Fort Worth, Tarrant County, Texas.

RETURNED GOODS

Merchandise Returned for Credit must be accompanied by a returned merchandise authorization (RMA) number issued by Company within 90 days of our invoice date. Merchandise must be returned; freight prepaid, in its original factory sealed packaging and is subject to a 50% restocking fee. Discontinued, non-standard, modified (CDX) or unsaleable merchandise will not be accepted as returned goods for credit. Merchandise Returned Under Warranty for Credit must be accompanied by a return merchandise authorization (RMA) number issued by us within the warranty period. In addition, ceiling fan warranty claims made by Company dealers on behalf of end users must be accompanied by a copy of the end user's dated proof of purchase as evidence of warranty validity. Merchandise must be returned, freight prepaid, in its original factory packaging. Merchandise that has been modified, or is missing parts, or that is not in its original packaging will be repaired and returned freight prepaid (if the warranty claim is approved). If merchandise cannot be repaired, credit will be issued at the invoiced value, less the value of any missing parts.

CANCELLATION BY BUYER

No merchandise may be returned for credit or replacement except on written approval by Company. Orders placed with and accepted by Company may not be cancelled except with Company's written consent. Purchase orders cancelled more than 5 days after the date of Acknowledgement / Proforma are subject to a 50% cancellation fee.

DROP SHIPMENTS

Company reserves the right to refuse drop shipment or pick-up orders that are bound for destinations outside the Buyer's regular or assigned selling or service area. Drop shipments are subject to additional charges and at Company's discretion.

LIMITED WARRANTY

Company warrants that our products are free of defects in workmanship and materials. **Such warranty is in lieu of all other warranties including, without limitation, any implied warranties of merchantability or fitness for a particular purpose.** Company will, at our sole option, repair or replace, FOB shipping point, freight prepaid within the Continental U.S., any of our products defective in workmanship or materials. Such repair or replacement is the sole and exclusive remedy against Company and is limited to two (2) years from the date of invoice to the original end user of all lighting, ceiling fan and accessory products (except Energy Star lighting products). Company warrants our Energy Star lighting products for three (3) years from the date of the invoice to the original end user. The Company warrants our integral LED light fixtures for five (5) years from the date of invoice to the original end user on driver and array parts. The Company also offers specific warranty on its ceiling fans directly to the original end users of such products and such warranties will vary between models. Consult the warranty inside each ceiling fan box for further information. The Company's warranties are not applicable to any lighting product that is not installed and operated in accordance with the National Electric Code (NEC) and Company's product instructions, including, but not limited to, lamping requirements and installation instructions. Consult the warranty included inside each light fixture box for further information. Company does not warrant any product which we promote and sell as "discontinued" or any product which has been altered or repaired outside of our factory or any product which, in our opinion, has been subject to abuse, misuse, negligence, accident or improper installation, maintenance or storage. **Company will not be responsible for any costs incurred in the removal or reinstallation of any product nor any consequential or incidental damages arising out of or in connection with product use or performance or any breach of aforementioned warranties.** The terms, specifications, and conditions contained herein supersede all previous terms, specifications, and conditions, and are subject to change without notice.

PLACE OF PAYMENT AND APPLICABLE LAW

Buyer agrees to pay all sums which may become due under this order or which he may otherwise owe to Company at the principal office of Company in Fort Worth, Tarrant County, Texas. This agreement shall be governed by and construed in accordance with the laws of the State of Texas. Buyer hereby agrees and consents to the jurisdiction of the Courts of the State of Texas and further consents to the exclusive and mandatory venue in Tarrant County, Texas, for any dispute arising between the Company and Buyer.

FORBEARANCE/NO WAIVER

Forbearance or failure of Company to enforce any of these conditions or to exercise any right accruing from any default of Buyer shall not affect or impair Company's rights should such default continue or in case of any subsequent default of Buyer, nor shall such forbearance or failure be deemed a waiver of Company's rights in case of other or future defaults of Buyer.

SECURITY INTEREST

Buyer grants Company a security interest in all goods purchased from Company, the exact description of which goods is found in each invoice presented to Buyer. Buyer appoints Company, as Buyer's attorney-in-fact for purposes of signing and filing with appropriate authority a Financing Statement (UCC-1) or any modification or extension thereof.

CATBIGX20

Oxygen Rev. 5-1-20

oxygenlighting.com

