



dweLED

By WAC



dweLED

LED Pendants + Chandeliers.....	2
LED Sconces + Bath.....	44
LED Sconces	58
LED Bedside + Swing Arms	70
LED Ceiling Mounts	82
LED Outdoor	90



LED Pendants + Chandeliers

Providing an even layer of energy-efficient illumination for modern interiors and exteriors, dweLED debuts an innovative selection of LED pendants and chandeliers. From free-flowing silhouettes and solid drum profiles to multi-armed eclectic and geometric designs, these luminaires are ideal for mid-upscale homes, multi-family and assisted living residences, as well as hospitality applications.

LACEY



PD-45316-BK/GO



PD-45322-BK/GO



16" & 22" LED PENDANT

- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 54,000 hours
 Input: 120V/277V


PD-45316: Size: 16" Watt: 20W
 LED Lumens: 884
 Delivered Lumens: 633

PD-45322: Size: 22" Watt: 48W
 LED Lumens: 2,958
 Delivered Lumens: 1,003

Finish

BK/GO:
 Black/Gold

Example: **PD-45322-BK/GO**

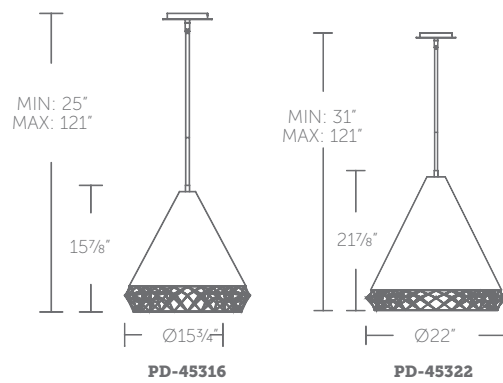

“Elegance edged in gold metalwork. A true revelation.”

PD-45322-BK/GO shown



“ A new definition of dark + light.
A white shade peaks out from a bold black dome. Illuminating with grace. ”

PD-23316-BK shown



PD-23316-BK



16" LED PENDANT

- Downlight with acrylic shade
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-23316: Size: 16" Watt: 29W
 LED Lumens: 1090
 Delivered Lumens: 781

Finish



Example: **PD-23316-BK**

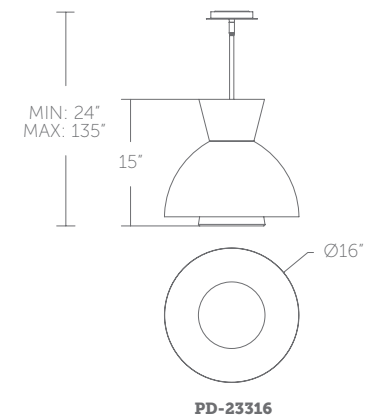

STRUM



PD-35320-BK



20" LED PENDANT

- Downlight with 2 layer fabric shade and acrylic diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- ACLED driverless technology

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV
 Rated Life: 50,000 hours
 Input: 120V



PD-35320: Size: 20" Watt: 24W
 LED Lumens: 1,348
 Delivered Lumens: 877

Finish



BK:
Black

Example: **PD-35320-BK**

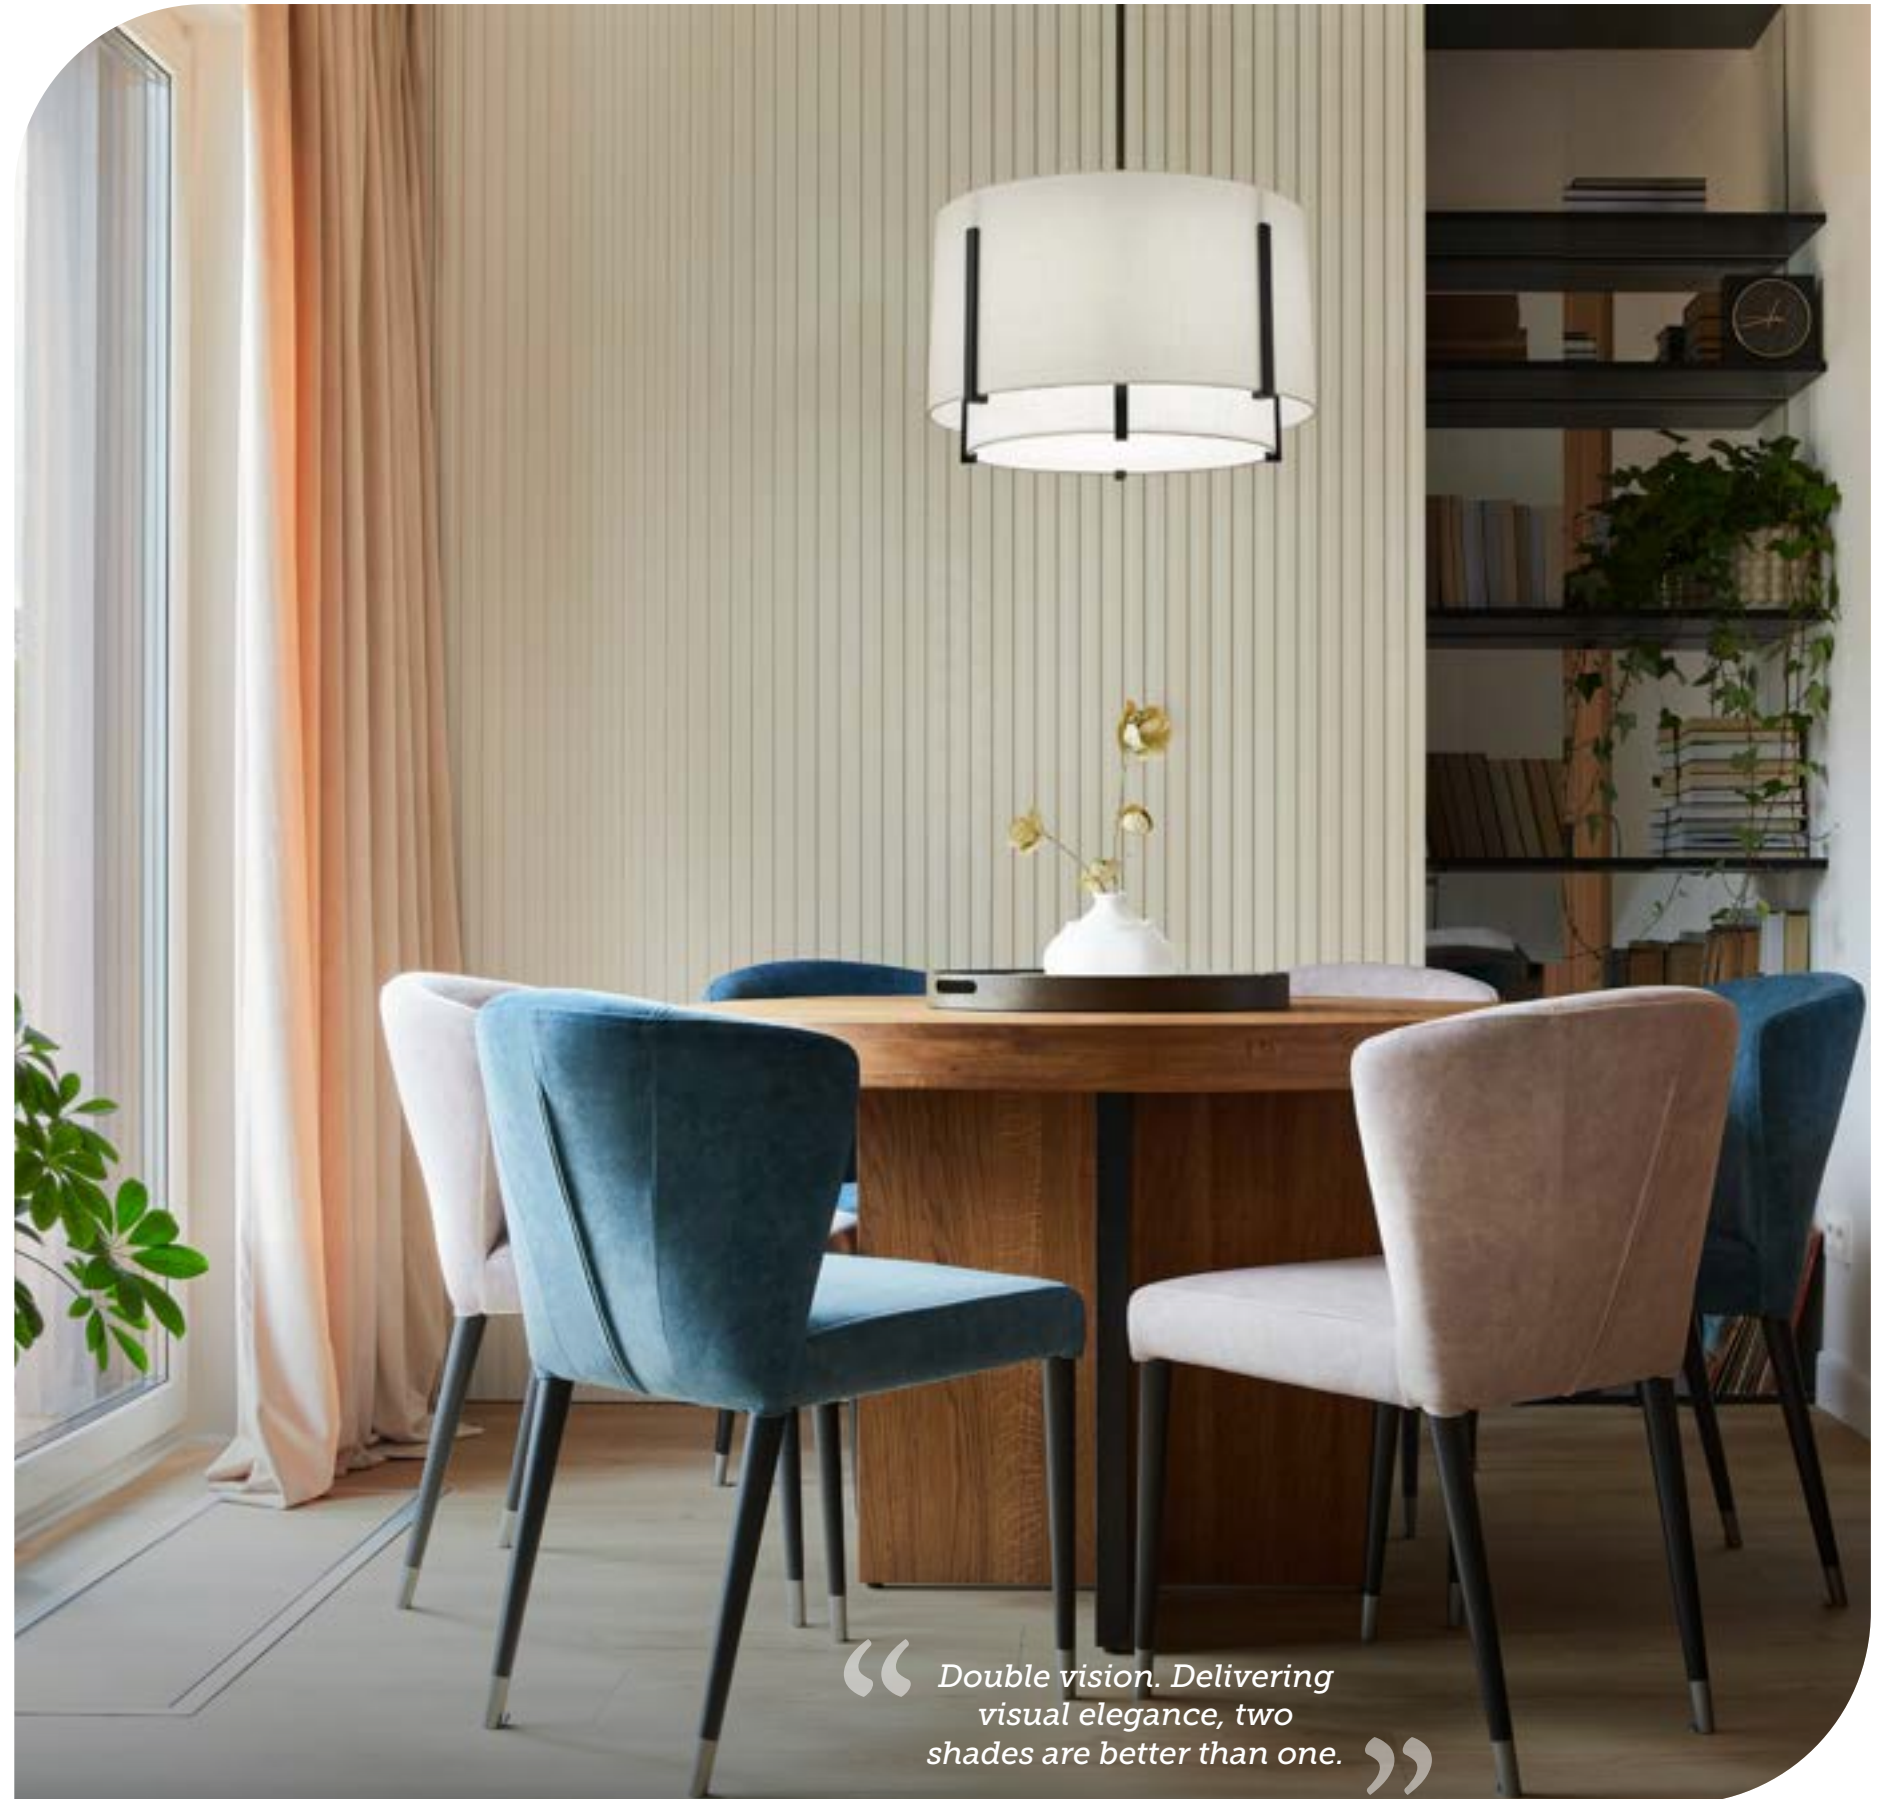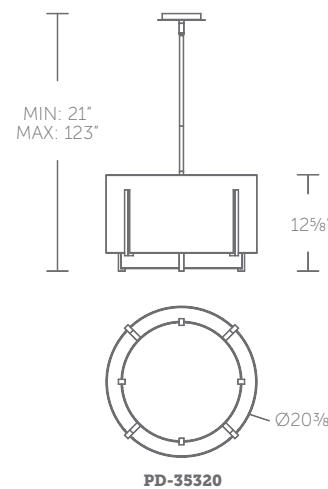

“ Double vision. Delivering visual elegance, two shades are better than one. ”

PD-35320-BK shown



“ An inside-out design. Sleek lines encase soft fabric and glowing light. ”

PD-33331-BK shown



PD-33331-AB



PD-33331-BK



31" LED CHANDELIER

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on rectangular canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

Finish

- AB:** Aged Brass
- BK:** Black

PD-33331: Size: 31" Watt: 29W
 LED Lumens: 1,367 Delivered Lumens: 946

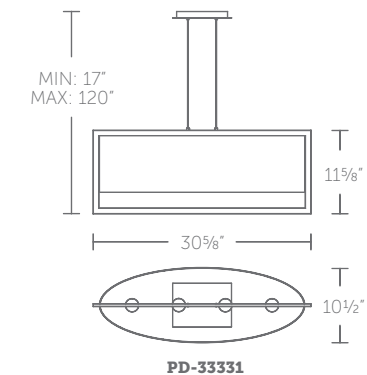

PD-33331



See complementary pieces on page 12-13.

PARK AVENUE



PD-33312-BK



PD-33312-AB



12" LED MINI PENDANT

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Slide-on square canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V


PD-33312: Size: 12" Watt: 8W
 LED Lumens: 434 Delivered Lumens: 289

Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-33312-AB**

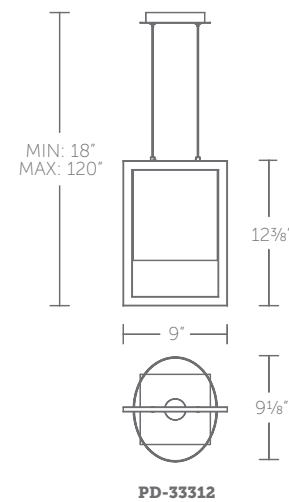

 See complementary pieces on page 10-11.



“ An inside-out design. Sleek lines encase soft fabric and glowing light. ”

PD-33312-AB shown



“Mysterious as the moon. Opal glass casts a diaphanous glow through creamy decorative alabaster.”

PD-43310-BK shown



MOONSTONE

10" LED MINI PENDANT



- Downlight with faux alabaster exterior and opal glass shade
- Faux alabaster. Like real stone, each piece is unique
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-43310: Size: 10" Watt: 11W
 LED Lumens: 815
 Delivered Lumens: 641

Finish

BK:
 Black

Example: **PD-43310-BK**

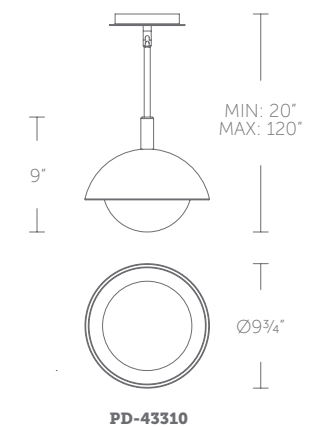



CHANTILLY



14" LED PENDANT

- Downlight with faux alabaster interior and clear glass exterior
- Faux alabaster. Like real stone, each piece is unique
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V


PD-25314: Size: 14" Watt: 15W
 LED Lumens: 1,482
 Delivered Lumens: 1,106

Finish



BK:
Black

Example: **PD-25314-BK**

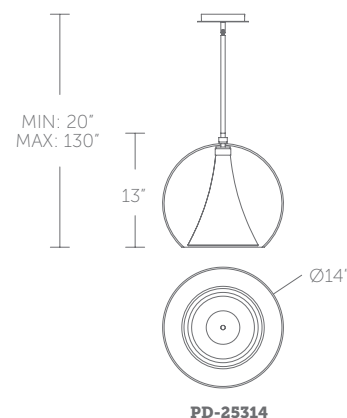

“ An unexpected first impression.
 Glowing alabaster captured
 within a clear crystal globe. ”

PD-25314-BK shown



“ Twisting in and around like a graceful knot. A play of light and shadow in an eternal flowing motion. ”

PD-19324-AB shown



PD-19324-BK



24" LED CHANDELIER

- Omnidirectional illumination
- Light source with etched acrylic tube exterior and silicone interior
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 54,000 hours
 Input: 120V/277V

PD-19324: Size: 24" Watt: 29W
 LED Lumens: 5,075 Delivered Lumens: 2,462


Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-19324-AB**



See complementary pieces on page 20-21.

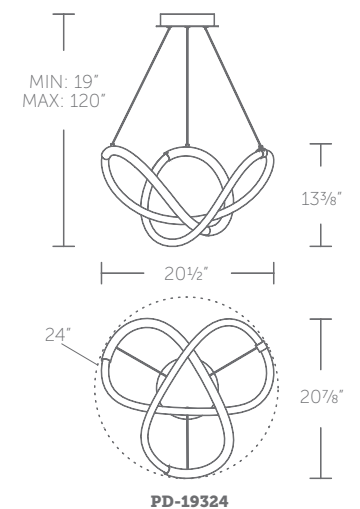



PD-19348-BK



48" LED CHANDELIER

- Omnidirectional illumination
- Light source with etched acrylic tube exterior and silicone interior
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Oval canopy
- Thin canopy conceals a proprietary 120V-220V-277V driver




Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V,
 100% - 10% TRIAC
 Rated Life: 54,000 hours
 Input: 120V-277V

Finish

- AB: Aged Brass
- BK: Black

Example: PD-19348-AB

PD-19348: Size: 48" Watt: 45W
 LED Lumens: 6,685 Delivered Lumens: 3,243

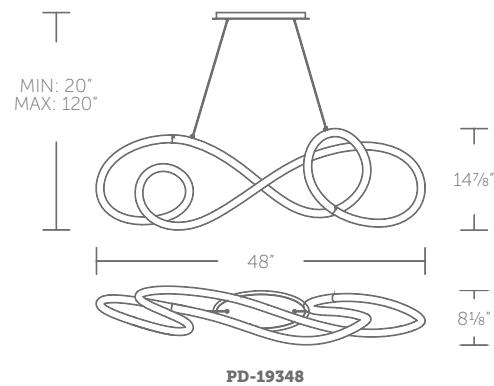

See complementary pieces on page 18-19.



“ Twisting in and around like a graceful knot, a play of light and shadow in an eternal flowing motion. ”

PD-19348-AB shown



“ Squaring the circle. LED infinity captured inside a clean, cubed architectural delight. ”

PD-57317-BK shown



PD-57327-BK



PD-57317-BK




17" & 26" LED PENDANT

- Omnidirectional illumination with silicone diffuser
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-57317: Size: 17" Watt: 28W
 LED Lumens: 2,149
 Delivered Lumens: 1,092

PD-57327: Size: 26" Watt: 35W
 LED Lumens: 2,715
 Delivered Lumens: 1,380

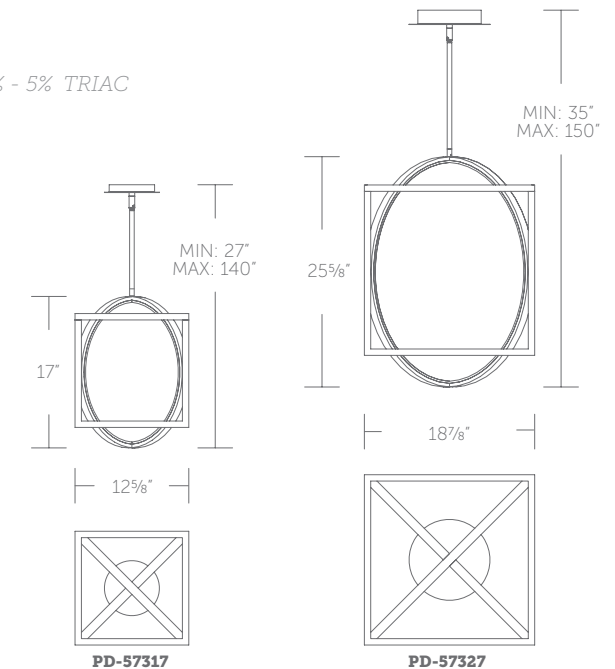

Finish



Example: PD-57317-BK



DOME

10" LED MINI PENDANT



- Downlight with black exterior and gold interior
- Layered acrylic shade with etched interior and clear exterior
- Low profile, adjustable powered aircraft cables for an ultra-clean look with matching color
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-37310: Size: 10" Watt: 8W
 LED Lumens: 658
 Delivered Lumens: 394

Finish



Example: **PD-37310-BK/GO**

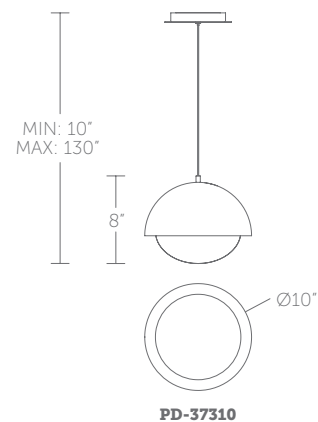

“Half dark, half bright. An opaque dome shade tops a glowing sphere of light.”

PD-37310-BK/GO shown

RINGLET



“An upscale, luminous circle of soothing illumination.”

PD-27308-AB shown



PD-27308-AB



8" LED MINI PENDANT

- Seeded acrylic diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-27308: Size: 8" Watt: 7W
 LED Lumens: 285
 Delivered Lumens: 226

Finish

AB:
 Aged Brass

Example: **PD-27308-AB**

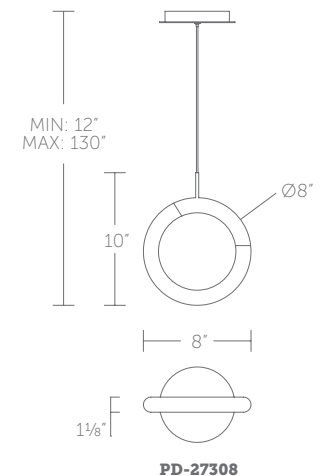



PD-29308-BN



PD-29308-BK

ICE CUBE

8" LED MINI PENDANT



- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3500K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-29308: Size: 8" Watt: 11W
 LED Lumens: 550 Delivered Lumens: 440

Finish



Example: **PD-29308-AB**

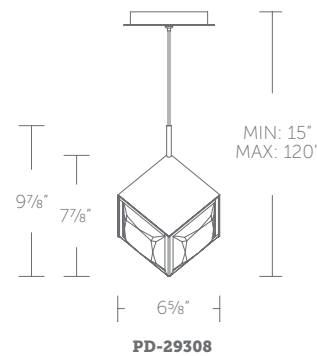

PD-29308



“ Faceted like a hand-cut jewel, adding a dash of chic to a room’s ensemble. ”

PD-29308-AB shown



“Clearly fascinating. Transparent tubes of LED light in a staggered arrangement of illumination.”

PD-51344-BK shown



PD-51344-AB



44" LED CHANDELIER

- Engineered with new LED filament technology, each LED filament lamp replaceable with quick connector
- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

PD-51344: Size: 44" Watt: 28W
 LED Lumens: 2,530
 Delivered Lumens: 2,024

Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-51344-AB**

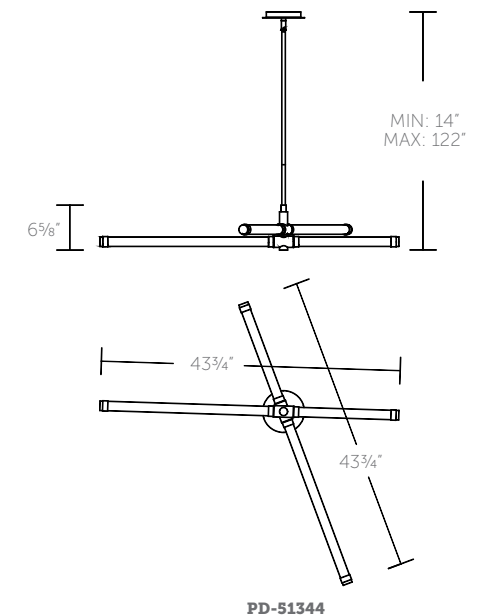

See complementary pieces on page 52-53.



15" & 22" LED MINI PENDANT

- Engineered with new LED filament technology
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V


PD-51315: Size: 15" Watt: 7W
 LED Lumens: 500
 Delivered Lumens: 401

PD-51322: Size: 22" Watt: 9W
 LED Lumens: 720
 Delivered Lumens: 577

Finish

- AB:** Aged Brass
- BK:** Black

Example: **PD-51322-BK**

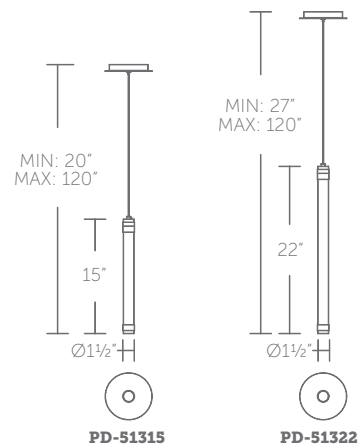

See complementary pieces on page 52-53.



“ Clearly fascinating. A transparent tube of LED light providing dramatic illumination. ”

PD-51322-BK shown



PD-51327-BK shown

“Clearly fascinating. Transparent tubes of LED light in a perfect arrangement of illumination.”



PD-51327-AB



PD-51327-BK




27" LED CHANDELIER


- Engineered with new LED filament technology, each LED filament lamp replaceable with quick connector
- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- Thin canopy conceals a proprietary 120V/277V driver



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

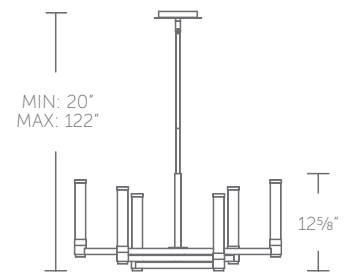

PD-51327: Size: 27" Watt: 20W
 LED Lumens: 1,635
 Delivered Lumens: 1,308

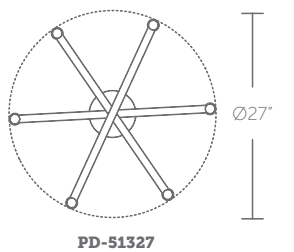

Finish


- AB:** Aged Brass
- BK:** Black

Example: PD-51327-BK



See complementary pieces on page 64-65.

PARALLAX

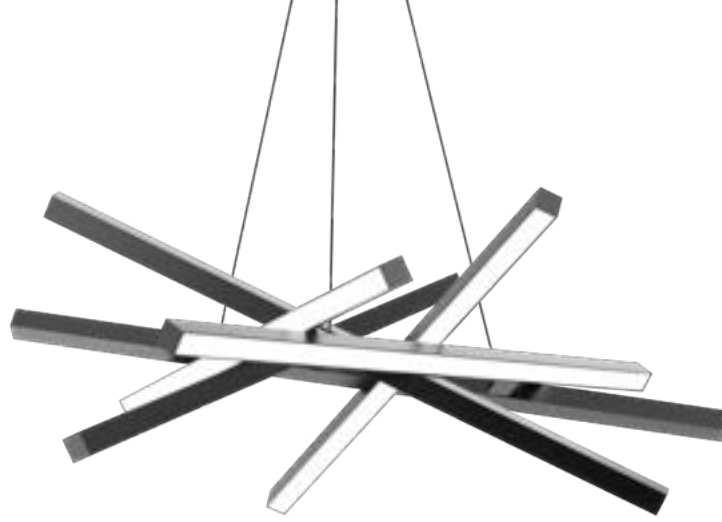

PD-73134-BK



34" LED CHANDELIER

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V-220V-277V driver



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V,
 100% - 5% TRIAC
 Rated Life: 50,000 hours
 Input: 120V-277V

PD-73134: Size: 34" Watt: 42W
 LED Lumens: 2,645
 Delivered Lumens: 1,664

Finish




BK:
Black

Example: **PD-73134-BK**



See complementary sconce on page 48-49.

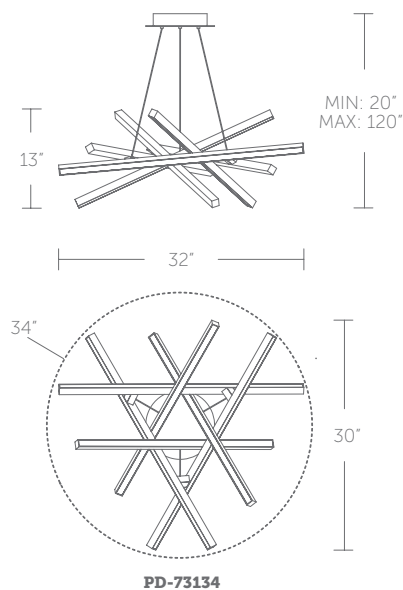


PD-73134



“ Effortlessly deliberate. A complex array of slender light bars create crisp lines, adding a sculptural feel to any space. ”


PD-73134-BK shown

PARALLAX

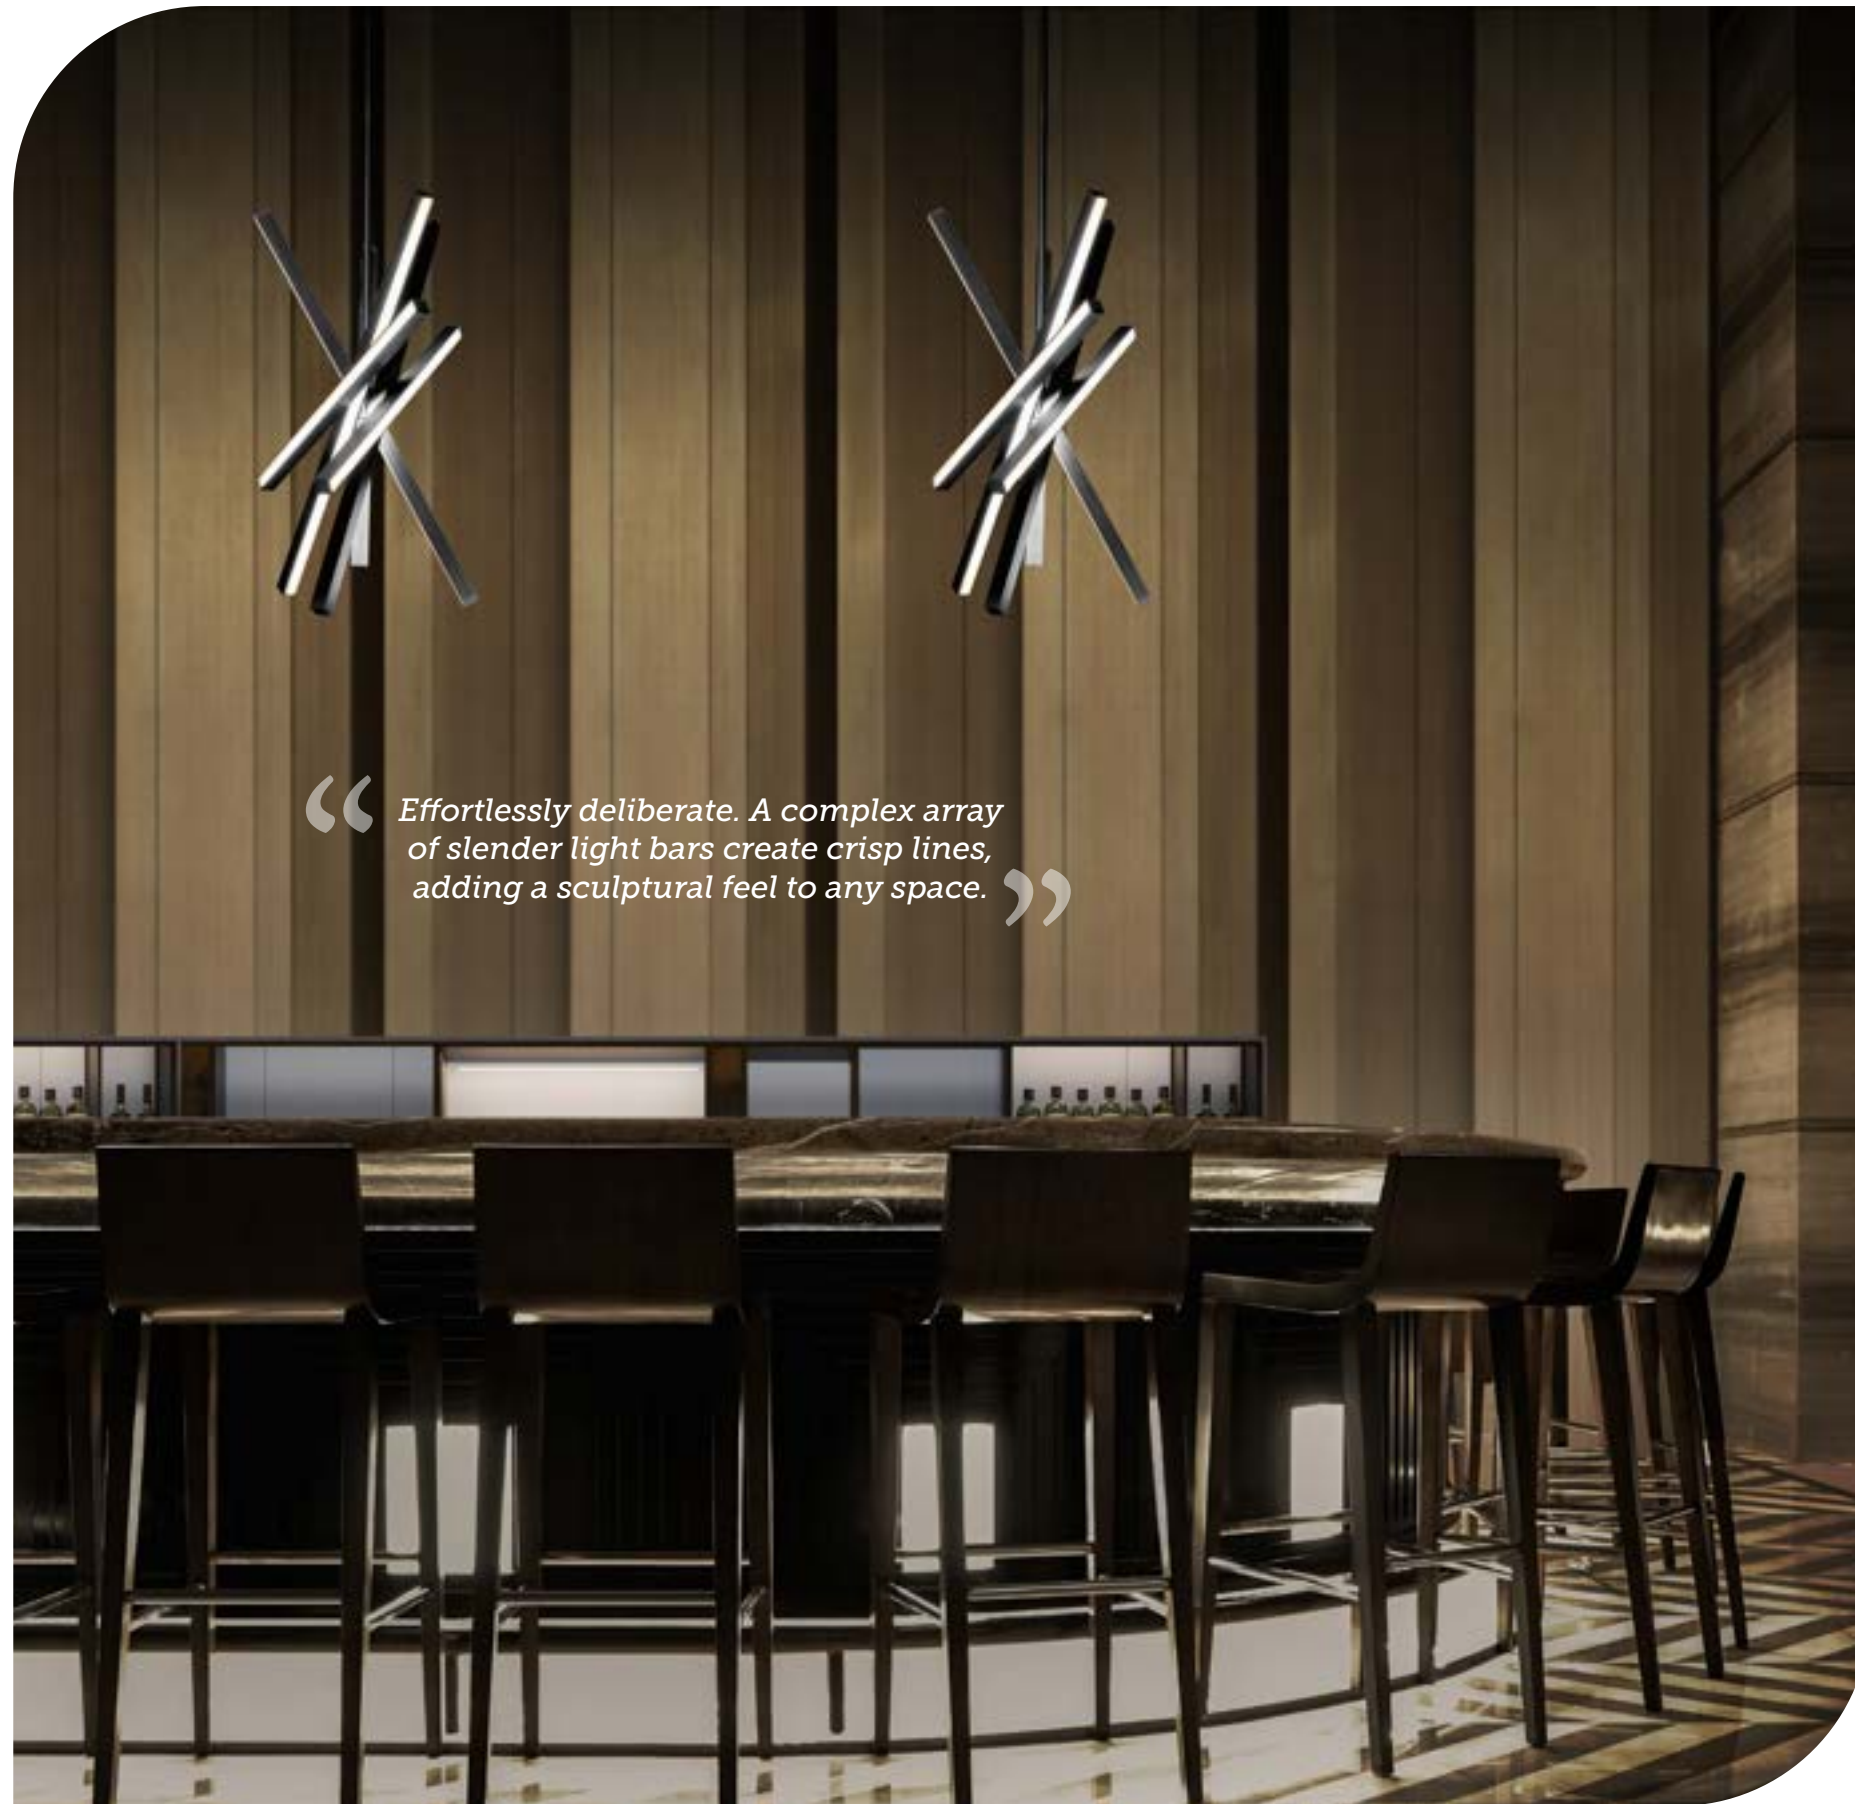

“ Effortlessly deliberate. A complex array of slender light bars create crisp lines, adding a sculptural feel to any space. ”

PD-73128-BK shown

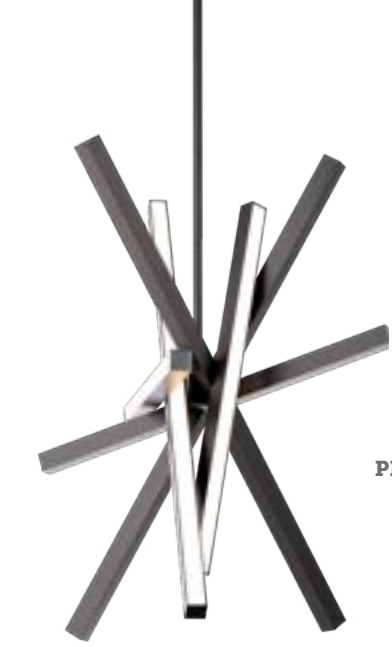

PD-73128-BK



28" LED PENDANT

- Rotatable arms for desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V, 100% - 5% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V


PD-73128: Size: 28" Watt: 27W
 LED Lumens: 1,758 Delivered Lumens: 1,106

Finish



Example: **PD-73128-BK**

 See complementary pieces on page 48-49.

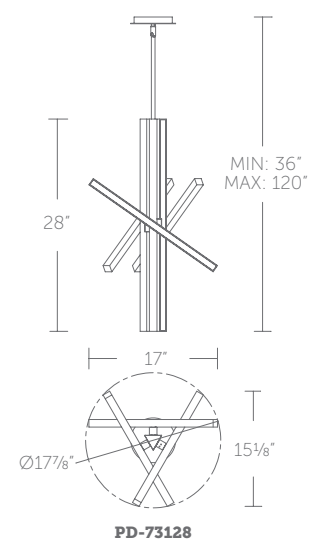



PD-21324-BK



24" LED CHANDELIER

- Omnidirectional illumination with silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Spin-on round canopy with minimal hardware
- May be mounted on a sloped ceiling
- Thin canopy conceals a proprietary 120V-220V-277V driver



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V,
 100% - 10% TRIAC
 Rated Life: 54,000 hours
 Input: 120V-277V


PD-21324: Size: 24" Watt: 45W
 LED Lumens: 4,175
 Delivered Lumens: 2,024

Finish

AB:
Aged Brass

BK:
Black

Example: **PD-21324-AB**

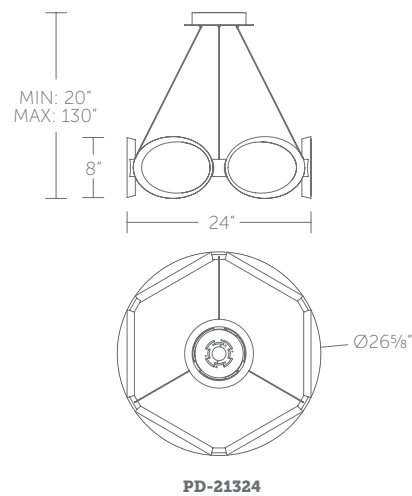

PD-21324



“ Interlaced rings united in a symbolic design, diffusing a fantastic feat of light. ”

PD-21324-AB shown



VORNADO

20", 23" & 35" LED CHANDELIER



“ Bands of silver and light twist in and out like a Mobius strip. ”

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 120V-220V-277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V
 Rated Life: 60,000 hours
 Input: 120V-277V

PD-87720: Size: 20" Watt: 31W
 LED Lumens: 2,825 Delivered Lumens: 2,075


PD-87723: Size: 23" Watt: 52W
 LED Lumens: 5,106 Delivered Lumens: 3,110

PD-87735: Size: 35" Watt: 52W
 LED Lumens: 5,278 Delivered Lumens: 3,550

Finish



Example: **PD-87723-CH**

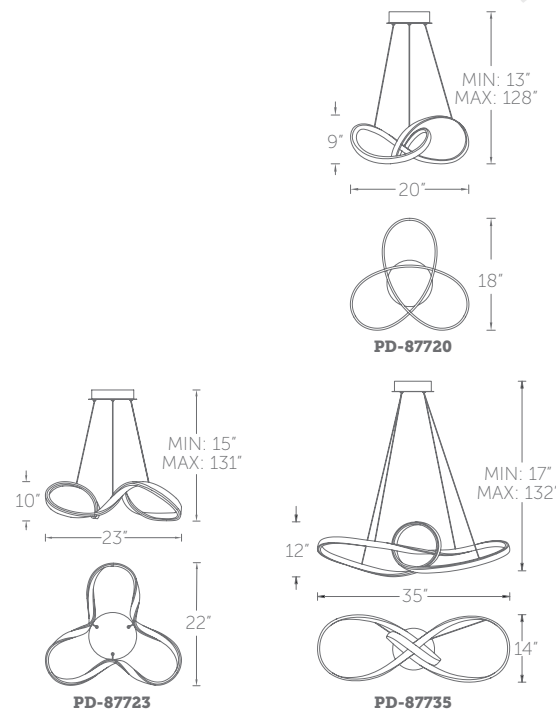

INTERLACE

28" & 39" LED CHANDELIER



“ Delicate bands of light weave playfully in and out on this flowing modern design. ”

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Canopy conceals a proprietary universal 20V-220V-277V driver

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV, 100% - 5% 0-10V
 Rated Life: 54,000 hours
 Input: 120V-277V


PD-47828: Size: 28" Watt: 57W
 LED Lumens: 4,853 Delivered Lumens: 3,263

PD-47839: Size: 39" Watt: 57W
 LED Lumens: 4,734 Delivered Lumens: 3,241

Finish



Example: **PD-47828-CH**

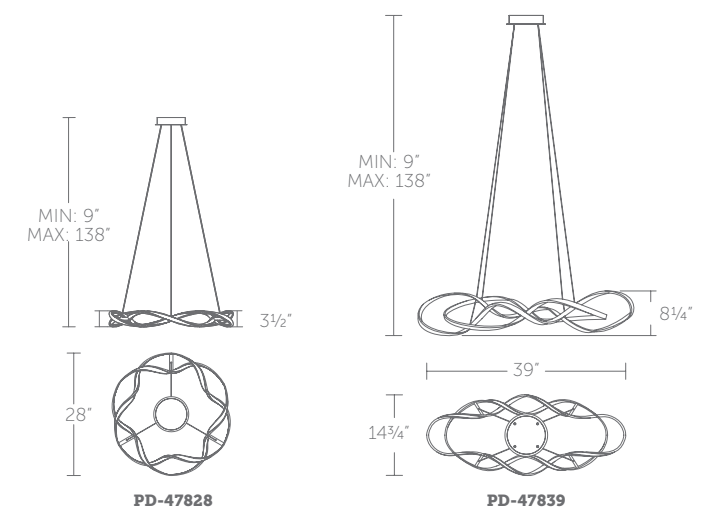



LED Sconces + Bath

Creative, progressive designs conjure an inspired blend of modern materials, artful pieces and advanced artisanship. Our LED bath bars and vanity lights provide a flattering, soft layer of energy-efficient illumination to their surroundings. Many of our luminaires offer built-in color temperature adjustability to deliver a customized environment and the versatility to be placed vertically or horizontally to suit your space.



WS-59324-30-BK




24" LED SCONCE + BATH

- Side lit with light guide material
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

Finish
 **BK:**
 Black
 Example: **WS-59324-30-BK**

WS-59324-27, WS-59324-30, WS-59324-35:
 Size: 24" Watt: 11W
 LED Lumens: 895
 Delivered Lumens: 382

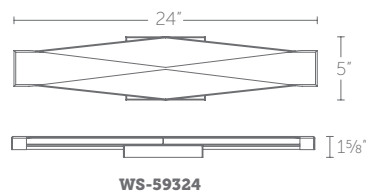

WS-59324



“Uniting clean geometric lines. Even, edge-lit LED illumination is dispersed through an elongated diamond shape.”

WS-59324-30-BK shown



“ Effortlessly deliberate. A complex array of slender light bars create crisp lines, adding a sculptural feel to any space. ”

WS-73120-30-BK shown



WS-73120-30-BK



WS-73127-30-BK

PARALLAX

20" & 27" LED SCONCE + BATH



- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

Finish



BK:
Black

Example: **WS-73120-30-BK**

WS-73120-27, WS-73120-30, WS-73120-35:


Size: 20" Watt: 20W
 LED Lumens: 1,287
 Delivered Lumens: Up to 789

WS-73127-27, WS-73127-30, WS-73127-35:


Size: 27" Watt: Up to 28W
 LED Lumens: 1,826
 Delivered Lumens: Up to 1,139



See complementary pieces on page 38-39.

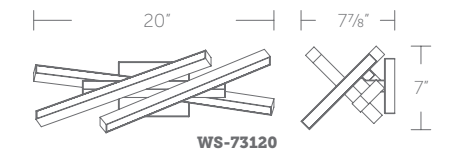

WS-73120

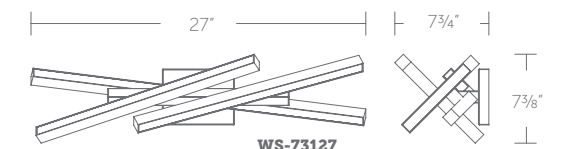

WS-73127

LOOPHOLE



WS-61326-30-BK



WS-61334-30-BK



26" & 34" LED SCONCE + BATH

- Omnidirectional illumination
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations


Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

Finish




Example: **WS-61334-30-BK**

WS-61326-27, WS-61326-30, WS-61326-35:
 Size: 26" Watt: 24W
 LED Lumens: 1475
 Delivered Lumens: Up to 981

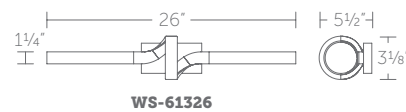

WS-61334-27, WS-61334-30, WS-61334-35:
 Size: 34" Watt: 29W
 LED Lumens: 1805
 Delivered Lumens: Up to 1211

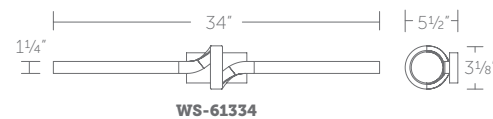

“ A twist of illumination. Elegant contours offering gracefully bending light. ”

WS-61334-30-BK shown



“ Clearly fascinating. A transparent tube of LED light providing dramatic illumination. ”

WS-51327-AB shown



20" & 27" LED SCONCE + BATH

- New LED filament technology
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

WS-51320: Size: 20" Watt: 7W
 LED Lumens: 320 Delivered Lumens: 256



WS-51327: Size: 27" Watt: 9W
 LED Lumens: 530 Delivered Lumens: 423

Finish

AB:
Aged Brass

BK:
Black

Example: **WS-51327-AB**

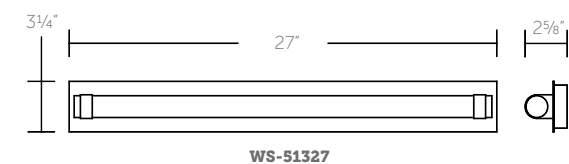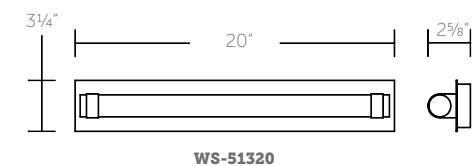

See complementary pieces on page 64-65.



WS-75318-BN



WS-75328-BK

MINIBAR

18" & 28" LED SCONCE + BATH




- Frontlight with acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V

Finish





BK:
Black



BN:
Brushed Nickel

Example: **WS-75328-BK**

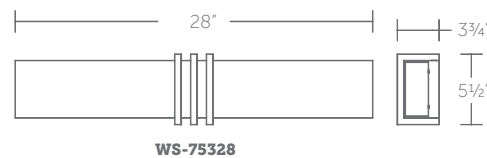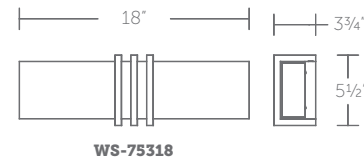

WS-75318: Size: 18" Watt: 19W
 LED Lumens: 1,985
 Delivered Lumens: 1,213
WS-75328: Size: 28" Watt: 24W
 LED Lumens: 2,550
 Delivered Lumens: 1,557




“ Dissected design. A trio of bands encircling a luminous rectangular bar, accenting style and flair. ”

WS-75328-BK shown



WS-35027-BK shown

“Elegant diffuse illumination. Pairs well with circular, oval, or rectangular mirrors.”

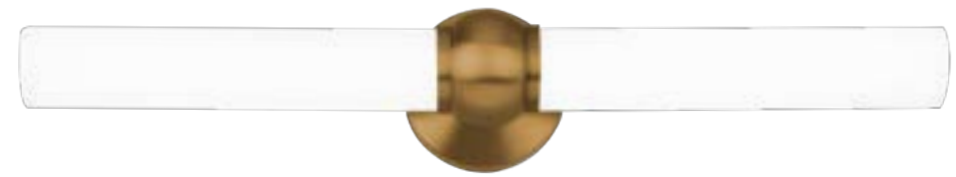

WS-35027-AB



WS-35020-CH

JULIET

20" & 27" LED SCONCE + BATH




- Frontlight with opal glass diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 54,000 hours
 Input: 120V


WS-35020: Size: 20" Watt: 27W
 LED Lumens: 2,059 Delivered Lumens: 1,439

WS-35027: Size: 27" Watt: 34W
 LED Lumens: 2,778 Delivered Lumens: 1,983


Finish

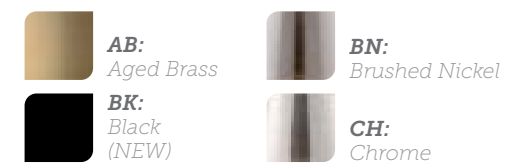

Example: **WS-35027-BK**

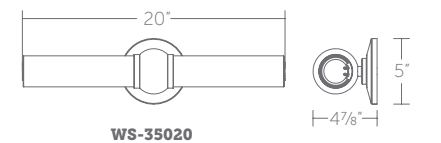

WS-35020

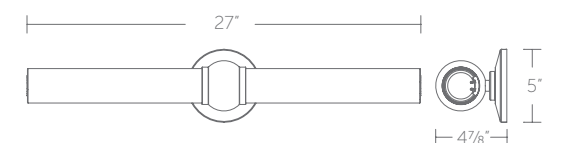


WS-35027



LED Sconces

Groundbreaking innovations in LED, materials engineering, and creative optical design pave the way for endless possibilities for striking wall luminaires. Our sophisticated and compact LED wall fixtures can be paired with your home's distinctive architectural elements while delivering an attractive, ambient glow. Shape the decor of your space with sleek modern pieces perfect for various tasks in simple yet appealing silhouettes.



WS-65323-30-BK



23" LED SCONCE

- Edge-lit with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

WS-65323-27, WS-65323-30, WS-65323-35:


Size: 23" Watt: 27W
 LED Lumens: 2,050
 Delivered Lumens: Up to 875

Finish



BK:
Black

Example: WS-65323-30-BK

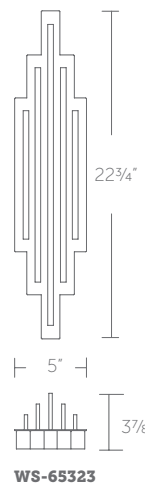

“Layers of luxe. Edge-lit panels stacked on a bold backplate create a stylized effect.”

WS-65323-30-BK shown



“ Glitz and style. A circle within a circle casts reflected illumination off a lustrous surface. ”

WS-53318-30-AB shown



WS-53318-30-BK



WS-53318-30-AB



18" LED SCONCE

- Frontlight with opal diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- 3CCT switch is installed in the canopy
- May be mounted on wall in all orientations

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 54,000 hours
 Input: 120V


WS-53318-27, WS-53318-30, WS-53318-35:

Size: 18" Watt: 7W
 LED Lumens: 577
 Delivered Lumens: 226

Finish

- AB:** Aged Brass
- BK:** Black

Example: **WS-53318-30-AB**



WS-53318



WS-51313-BK



WS-51313-AB

JEDI

13" LED SCONCE



- New LED filament technology
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted vertically or upside down


Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

WS-51313: Size: 13" Watt: 4W
 LED Lumens: 260 Delivered Lumens: 207

Finish

- AB:** Aged Brass
- BK:** Black

Example: **WS-51313-AB**

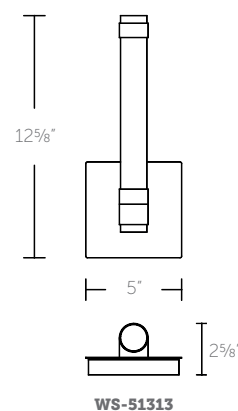


See complementary pieces on page 34-35.



“ Clearly fascinating. A transparent tube of LED light providing dramatic illumination. ”

WS-51313-AB shown

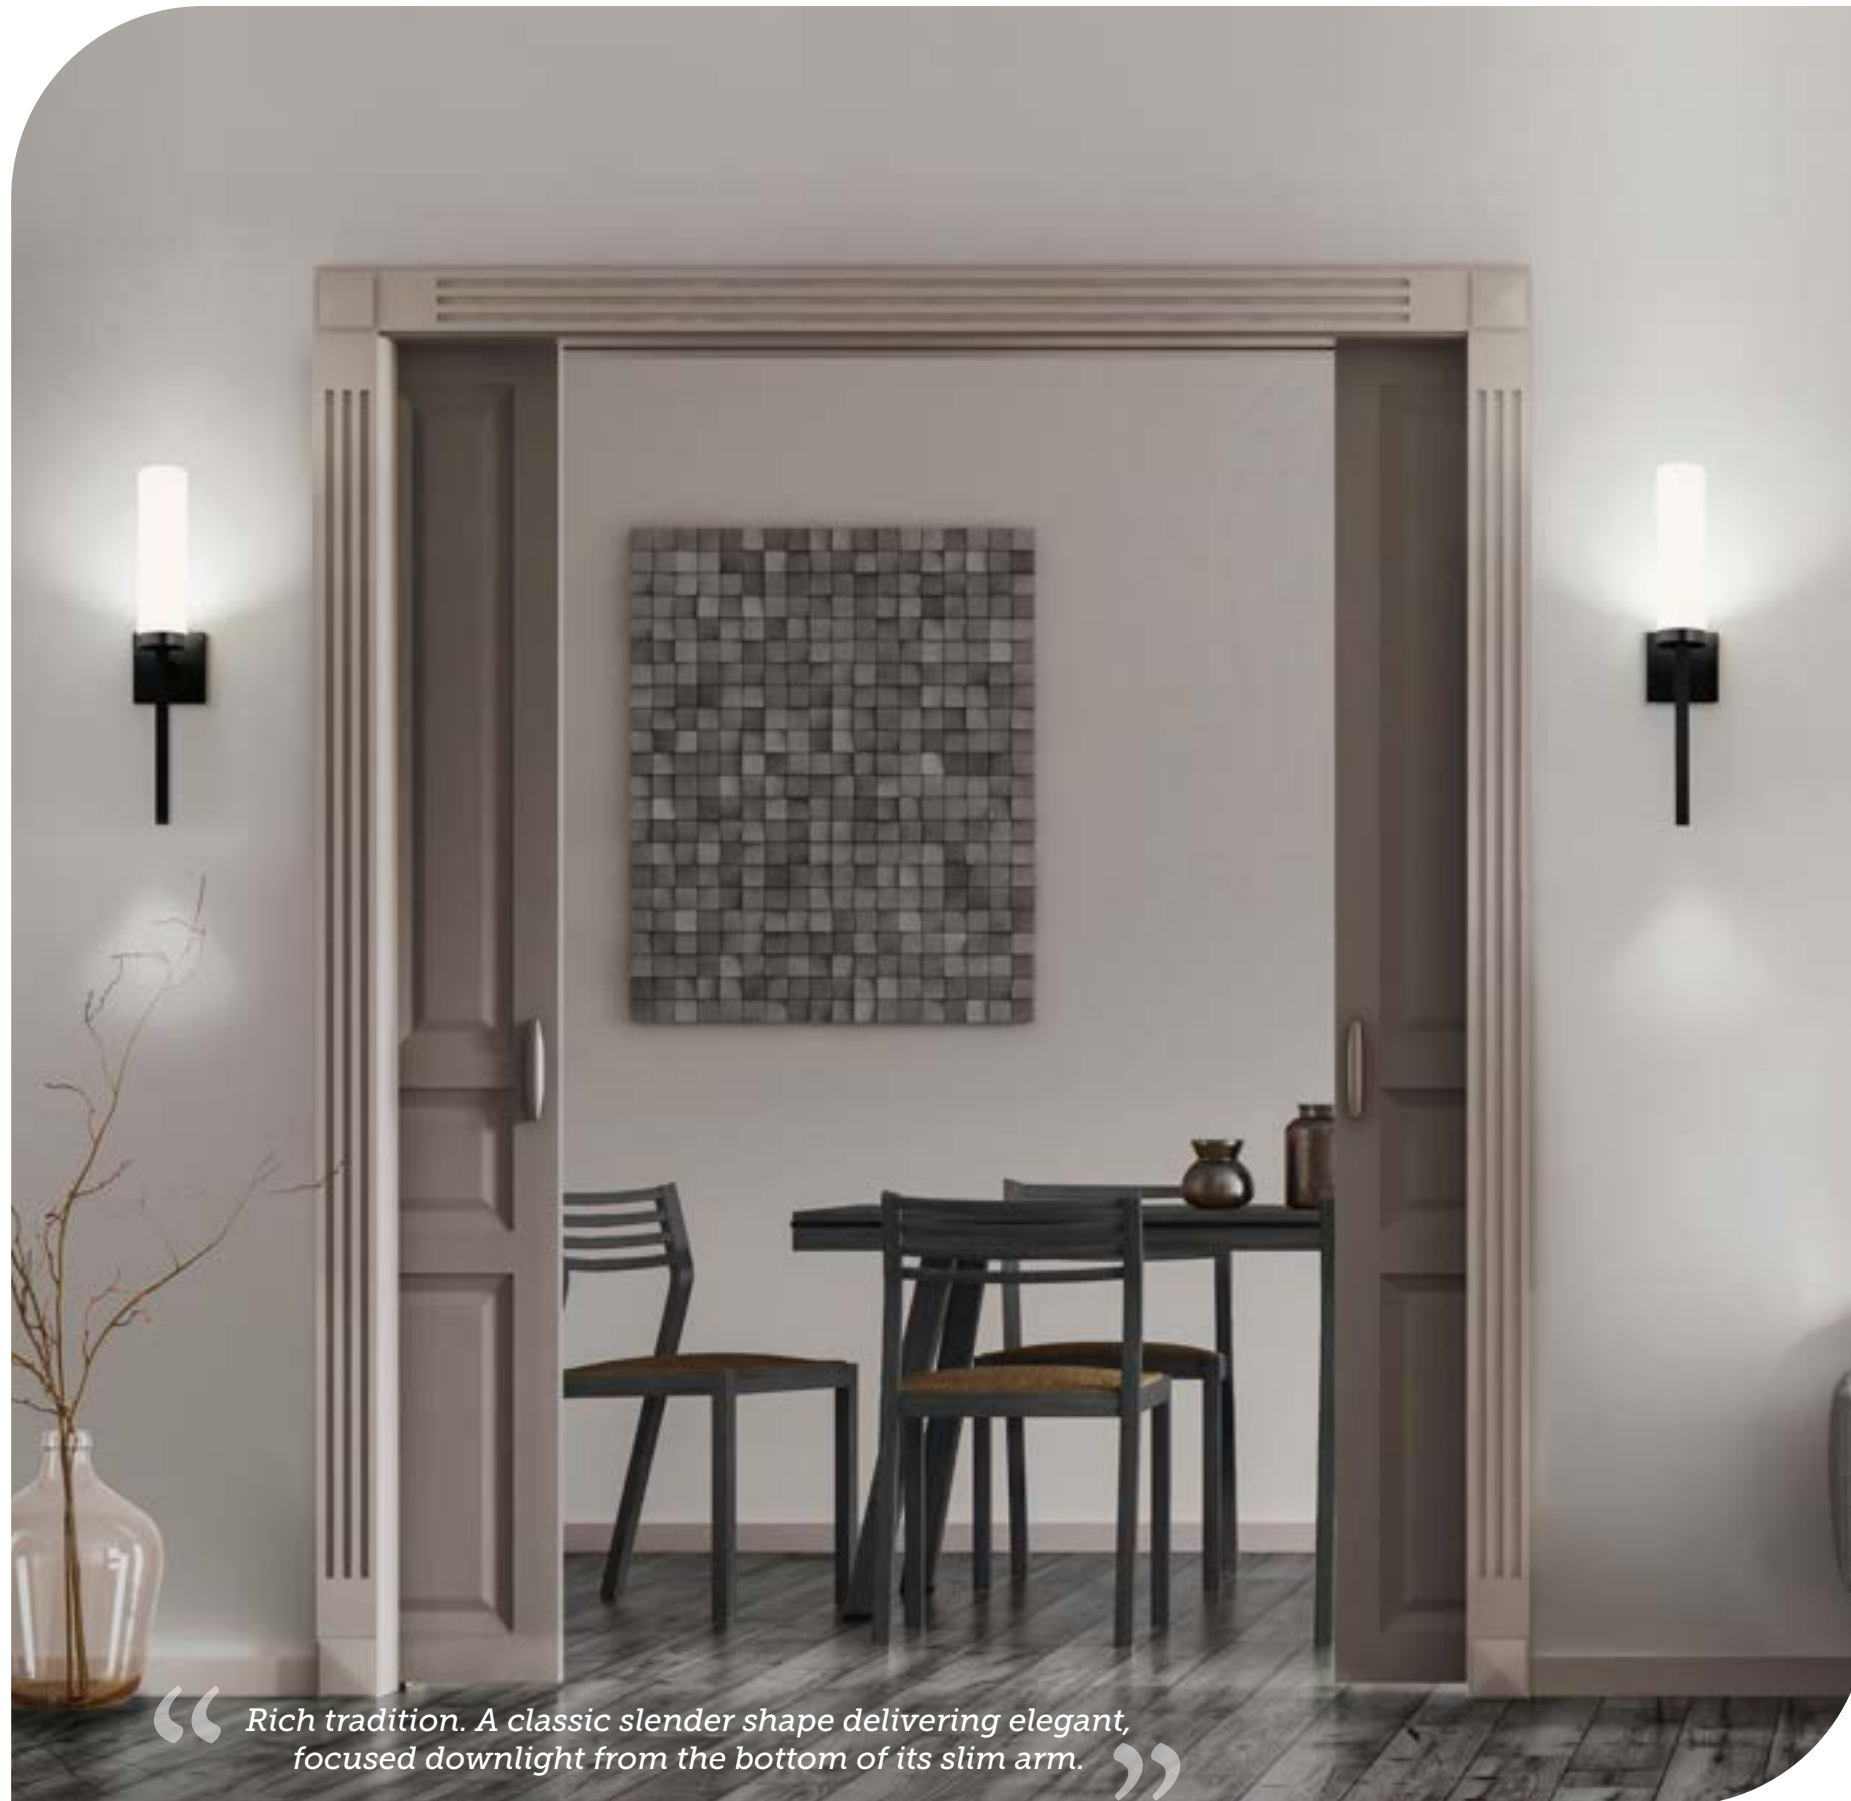

“ Rich tradition. A classic slender shape delivering elegant, focused downlight from the bottom of its slim arm. ”

WS-63322-BK shown



WS-63322-BK



22" LED SCONCE

- Ambient and downlight with opal glass diffuser
- Thin canopy conceals a proprietary 120V/277V driver




Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V

WS-63322: Size: 22" Watt: 20W
 LED Lumens: 2,135
 Delivered Lumens: 1,309

Finish

BK:
 Black

Example: **WS-63322-BK**

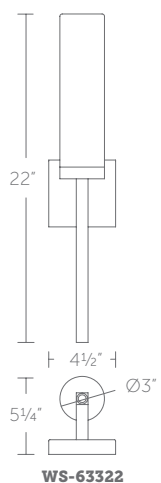

VOILGA



WS-55318-30-BK



18" LED SCONCE

- Fabric shade with etched acrylic diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted vertically or upside down

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 5% ELV
 Rated Life: 54,000 hours
 Input: 120V/277V

WS-55318-27, WS-55318-30, WS-55318-35:



Size: 18" Watt: 19W
 LED Lumens: Up to 2,146
 Delivered Lumens: Up to 630

Finish



BK:
Black

Example: **WS-55318-30-BK**

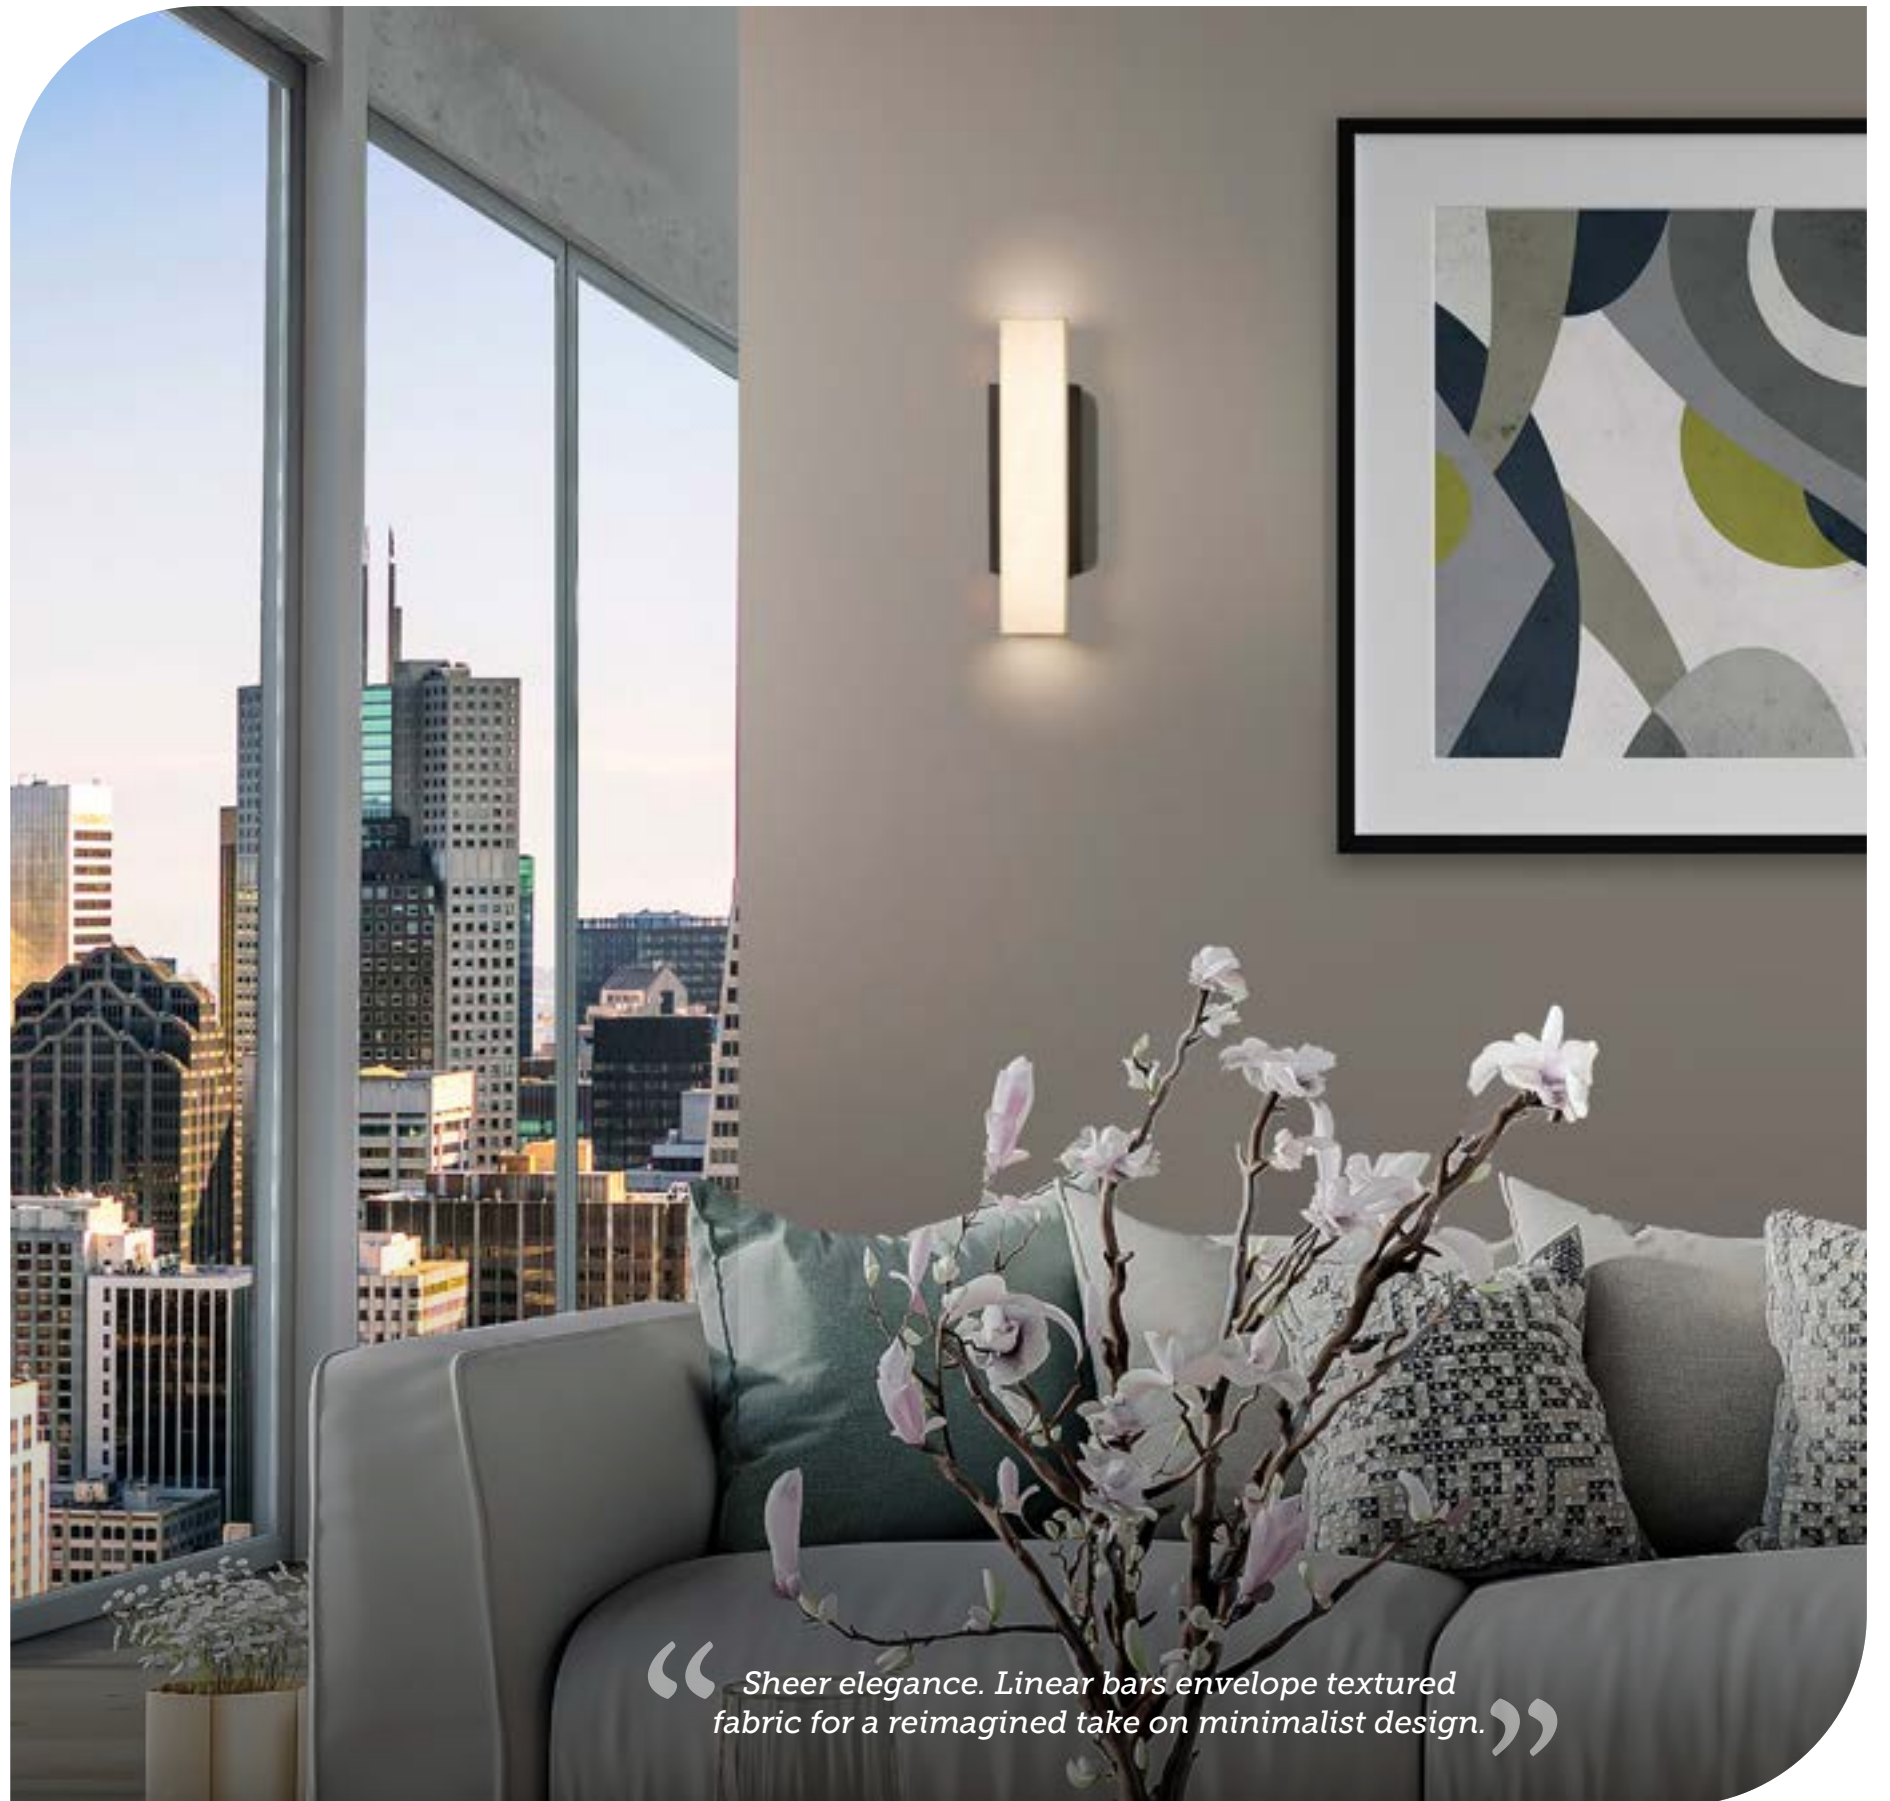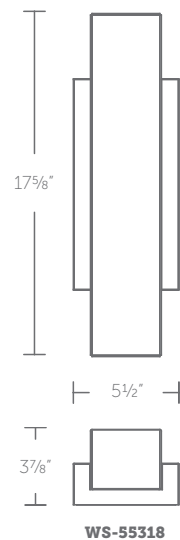


“ Sheer elegance. Linear bars envelope textured fabric for a reimagined take on minimalist design. ”

WS-55318-30-BK shown



LED Bedside + Swing Arms

Both decorative and functional, dweLED swing arm luminaires make a stylish addition to a bedside or living area. Exuding ageless beauty and timeless charm, modern and retro designs boast metal wall mounts supporting an articulating arm, integral driver and convenient fingertip touch dimming. Our ADA compliant, energy efficient LED sconces are visually appealing, brilliant and engaging—the perfect choice for use in private and public spaces.

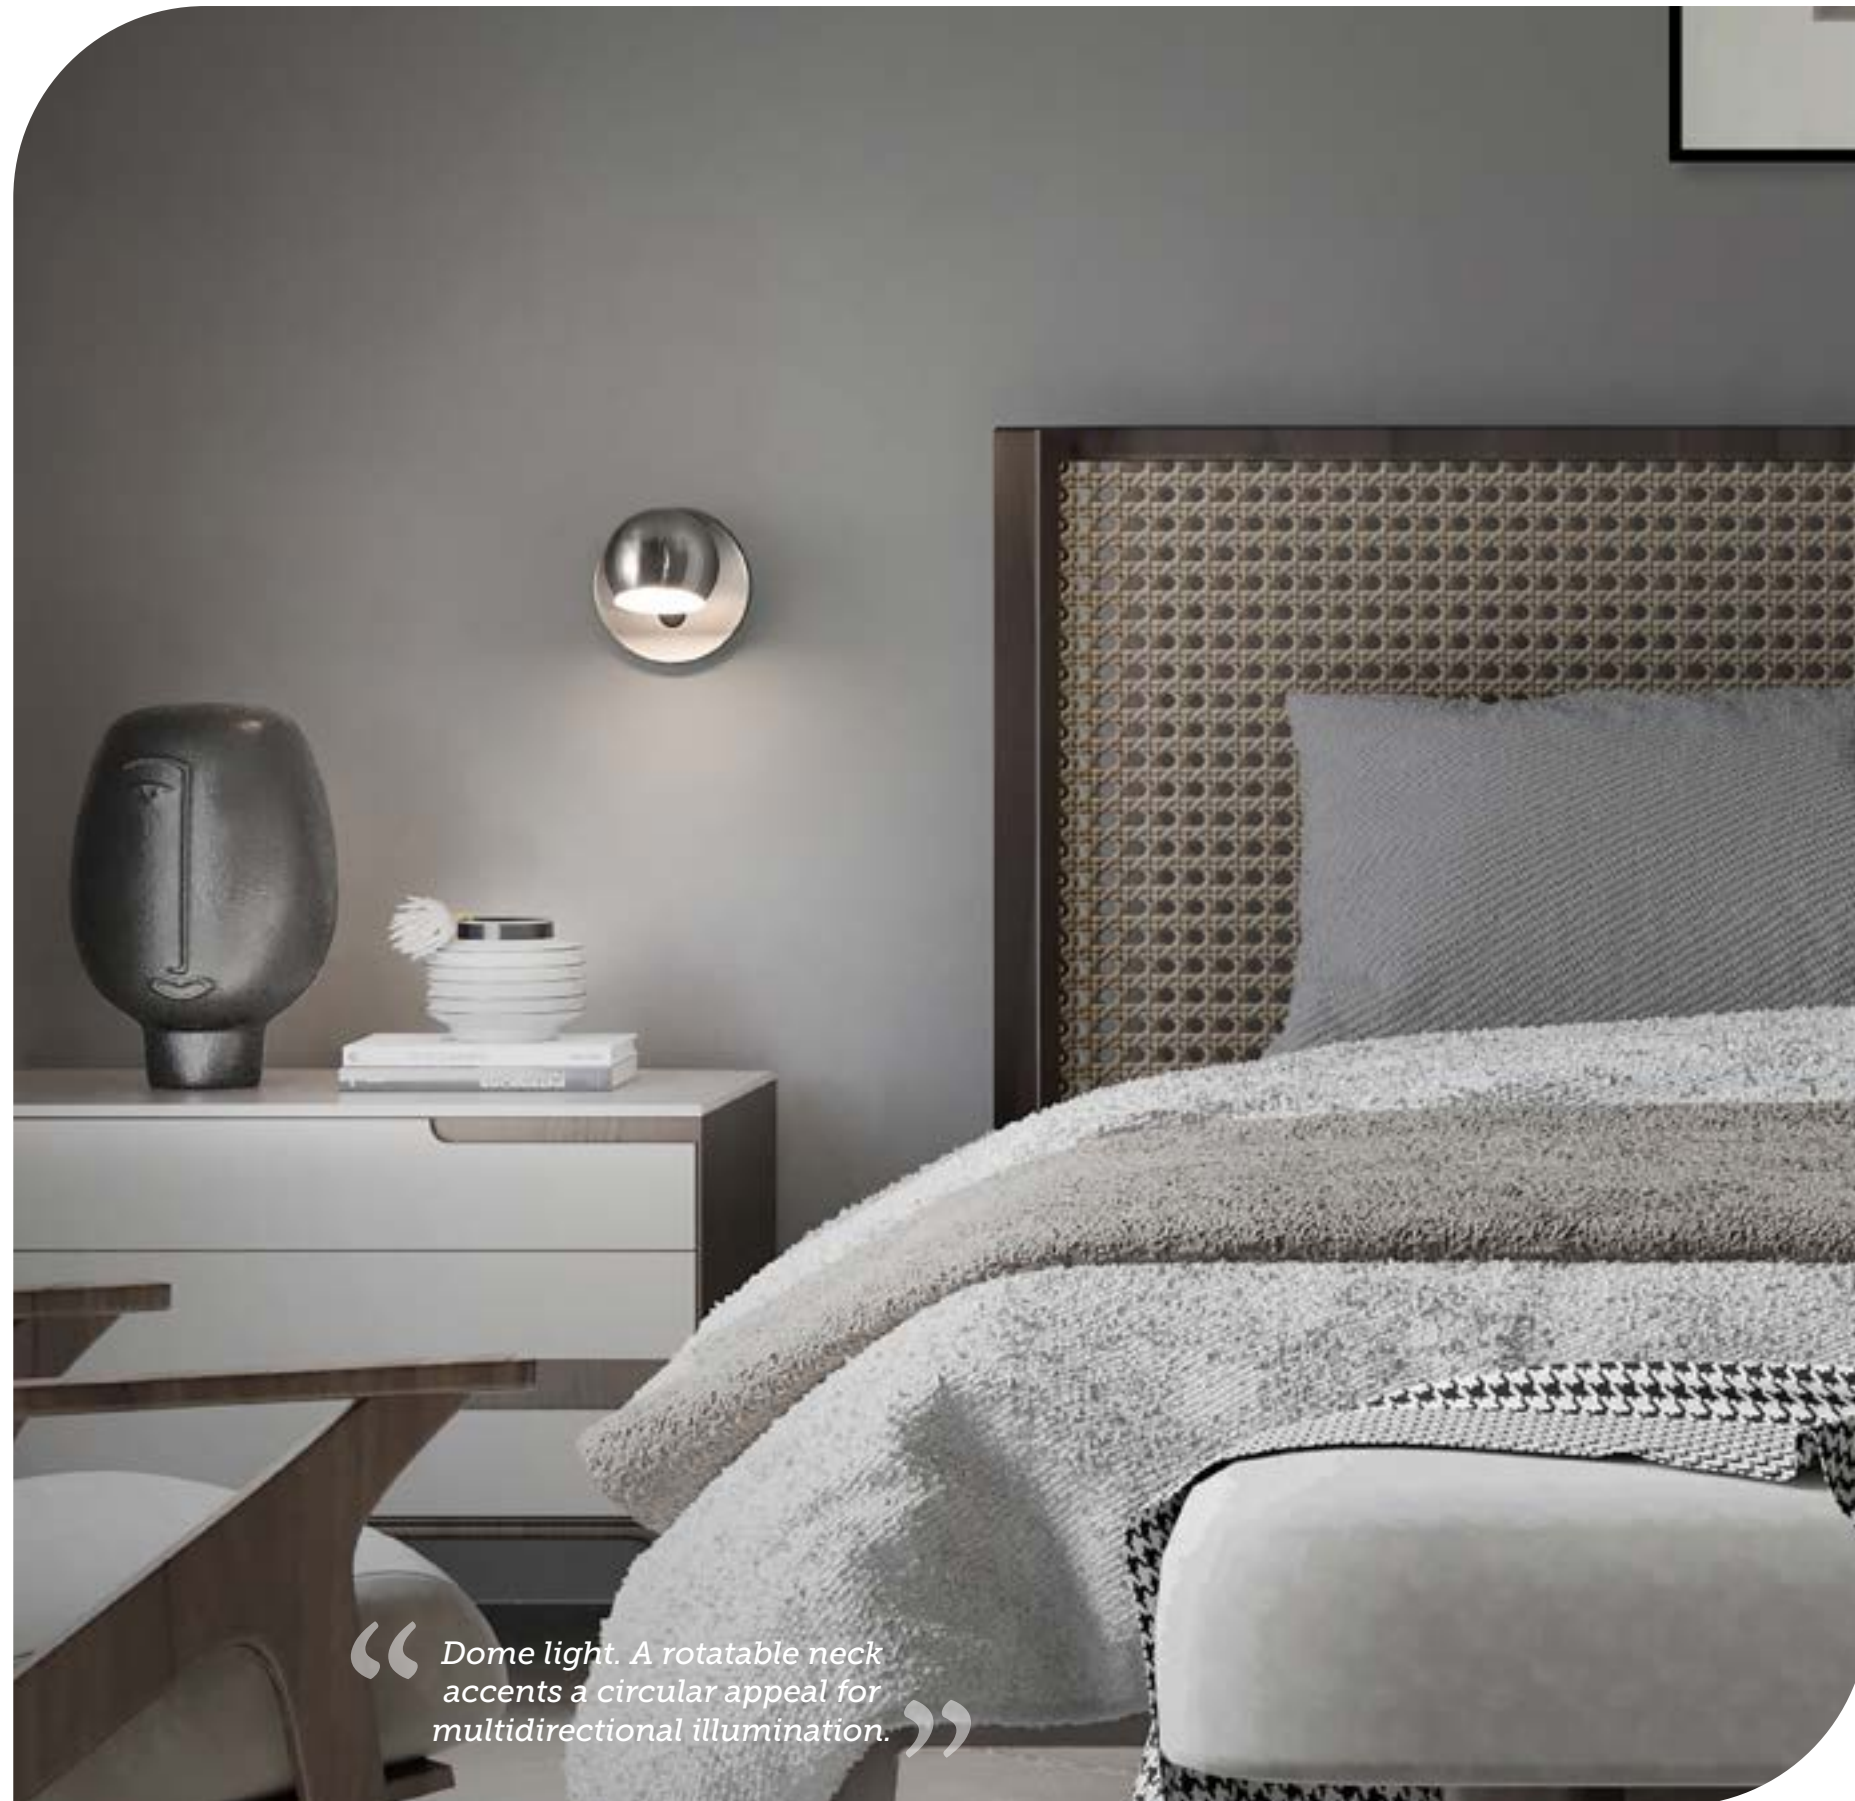

“ Dome light. A rotatable neck accents a circular appeal for multidirectional illumination. ”

BL-67305-BN shown



BL-67305-BK



BL-67305-AB



5" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- Light source offers 330 degree horizontal rotation and a 90 degree vertical rotation
- Driver concealed within the canopy


Color Temp: 3000K
 CRI: 90
 Rated Life: 54,000 hours
 Input: 120V

BL-67305: Size: 5" Watt: 8W
 LED Lumens: 1,050
 Delivered Lumens: 315

Finish

- AB:** Aged Brass
- BK:** Black
- BN:** Brushed Nickel

Example: **BL-67305-BN**

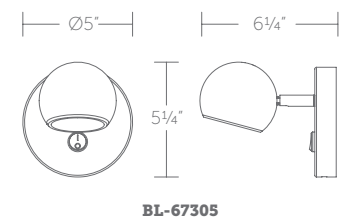

USB port on the bottom of the canopy for charging

See complementary piece on page 74-75.



BL-67320-BK



BL-67320-BN



20" LED BEDSIDE LAMP

- Two on/off toggle switch on the canopy to control each lamp individually
- Light source offers 330 degree horizontal rotation and a 90 degree vertical rotation
- Driver concealed within the canopy

Color Temp: 3000K
 CRI: 90
 Rated Life: 54,000 hours
 Input: 120V

BL-67320: Size: 20" Watt: 7W
 LED Lumens: 1,075
 Delivered Lumens: 322

Finish

AB:
Aged Brass

BK:
Black

BN:
Brushed Nickel


Example: **BL-67320-AB**



USB port on the bottom of the canopy for charging



See complementary piece on page 72-73.

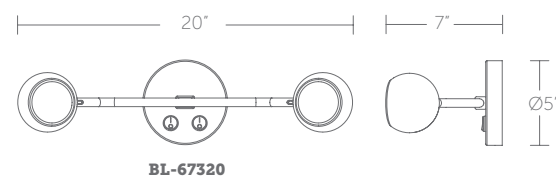

“ Dome light. A rotatable neck accents a circular appeal for multidirectional illumination. ”

BL-67320-AB shown



“ Ambidextrous. A flexible, multi-directional task light whose arm can swivel and straighten to deliver focused illumination. ”

BL-73314-30-WT shown



14" LED BEDSIDE LAMP

- On/off toggle switch at the base of the arm
- Light source offers 230 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Driver concealed within the canopy

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Rated Life: 54,000 hours
 Input: 120V


Finish

BK:
Black

WT:
White

Example: **BL-73314-30-WT**

BL-73314-27, BL-73314-30, BL-73314-35:
 Size: 14" Watt: 8W
 LED Lumens: 1,210
 Delivered Lumens: 315

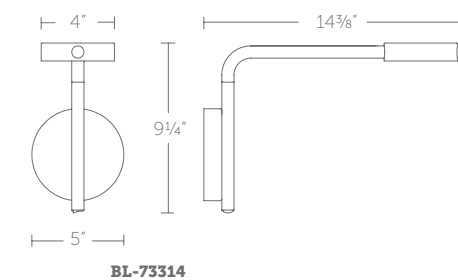

USB port on the bottom of the canopy for charging

On/off toggle switch at the base of the arm



BL-69317-BK/AB



17" LED BEDSIDE LAMP

- On/off toggle switch on the canopy
- Light source offers 180 degree rotation
- Thin canopy conceals a proprietary 120V/277V driver


Color Temp: 3000K
 CRI: 90
 Rated Life: 50,000 hours
 Input: 120V/277V

Finish

BK/AB:
 Black/Aged Brass

Example: **BL-69317-BK/AB**

BL-69317: Size: 17" Watt: 11W
 LED Lumens: 832
 Delivered Lumens: 486

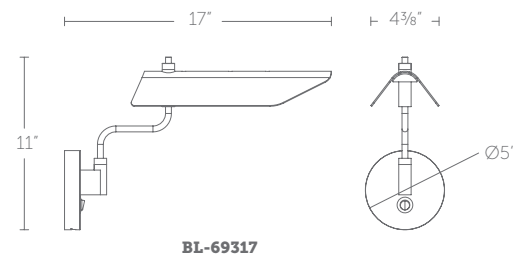

BL-69317



“ Enveloping light. A modern, folded design with a bold exterior offering gracefully reflected light. ”

BL-69317-BK/AB shown



“ Art’s perfect partner. With a slim, elegant profile, this sophisticated light is the perfect complement to any display piece. Conserves fine art while providing superior color rendering. ”

PL-11025-BN shown



PL-11042-BN



PL-11042-BK



17", 25", 33" & 42" LED PICTURE LIGHT

- Light source rotates 150 degrees
- Conversion plate included to accommodate 4" junction box
- Thin canopy conceals a proprietary universal 120V-220V-277V driver



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV, 100% - 10% 0-10V, 100% - 5% TRIAC
 Rated Life: 50,000 hours
 Input: 120V-277V

PL-11017: Size: 17" Watt: 18W
 LED Lumens: 569 Delivered Lumens: 380

PL-11025: Size: 25" Watt: 21W
 LED Lumens: 825 Delivered Lumens: 544

PL-11033: Size: 33" Watt: 28W
 LED Lumens: 1,072 Delivered Lumens: 747

PL-11042: Size: 42" Watt: 30W
 LED Lumens: 1,618 Delivered Lumens: 1,000

Finish







BK:
Black



BN:
Brushed Nickel

Example: **PL-11025-BN**

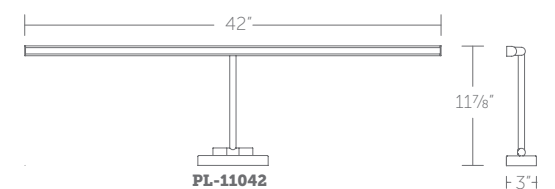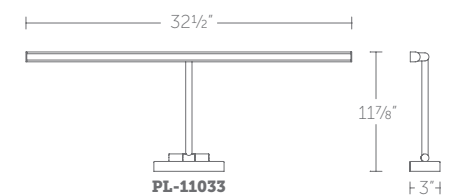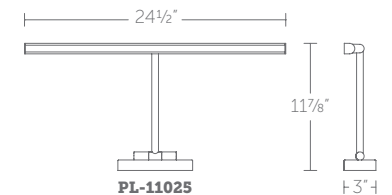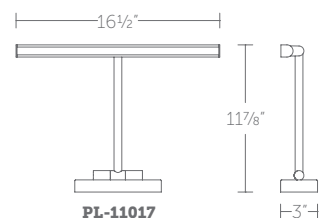



LED Ceiling Mounts

Our ceiling mounts push the envelope of design and LED technology to deliver authentic originals. Dimmable, energy-efficient flush mount luminaires evoke a bright, radiant illumination and pair classic elements with minimalistic design to create contemporary additions to residential and hospitality settings.

PARALLAX



FM-73116-30-BN



FM-73116-30-CH



FM-73116-30-BK



16" LED CEILING MOUNT

- Built in color temperature adjustability. Switch from 2700K/3000K/3500K.
- Thin canopy conceals a proprietary 120V/277V driver
- May be mounted on wall or ceiling in all orientations

Color Temp: 2700K/3000K/3500K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

FM-73116-27, FM-73116-30, FM-73116-35:
 Size: 16" Watt: 28W
 LED Lumens: 2,150
 Delivered Lumens: Up to 1,352

Finish



BK:
Black




BN:
Brushed Nickel



CH:
Chrome

Example: **FM-73116-30-BN**

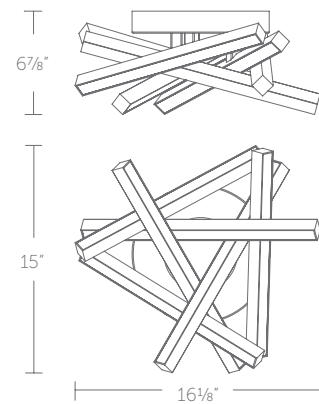

FM-73116



See complementary pieces on page 36-37.



“ Effortlessly deliberate. A ceiling mount or wall sconce of exaggerated proportions. Unparalleled. ”

FM-73116-30-BN shown



“ Circle in the square. Uniquely patterned, hammered glass creates a captivating play of shadow and light. ”

FM-W71310-30-BK shown



FM-W71310-30-BK

CUBOID

10" INTERIOR/EXTERIOR
LED CEILING MOUNT



- Backlit with glass diffuser
- Chrome plate reflector
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- ACLED driverless technology
- May be mounted on wall or ceiling in all orientations


Color Temp: 3000K/3500K/4000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC
 Rated Life: 60,000 hours
 Input: 120V

Finish

BK:
Black

Example: **FM-W71310-30-BK**

FM-W71310-30, FM-W71310-35, FM-W71310-40:
 Size: 10" Watt: 11W
 LED Lumens: 800
 Delivered Lumens: 369

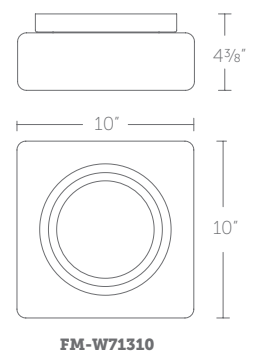

CALIBER



FM-W36607-AL



FM-W36607-BZ



FM-W36607-BK



FM-W36607-WT







7" INTERIOR/EXTERIOR LED CEILING MOUNT

• Proprietary universal 120V-220V-277V driver concealed within fixture


Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% 0-10V, 100% - 10% TRAIC
 Rated Life: 50,000 hours
 Input: 120V-277V

Finish


-  **AL:** Brushed Aluminum
-  **BK:** Black
-  **BZ:** Bronze
-  **WT:** White

Example: **FM-W36607-BK**

FM-W36607: Size: 7" Watt: 11W
 LED Lumens: 855
 Delivered Lumens: 545

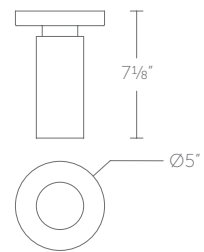

FM-W36607



See complementary pieces on our website.



“ Light projection tuned with precision. ”

FM-W36607-BK shown



LED Outdoor

Our exterior collections elevate outdoor lighting with nostalgic design elements, quality finishes, and powerful illumination. Our versatile indoor/outdoor LED pendants and sconces embody sophisticated, modern and transitional styles ideal for illuminating entryways, façades, walkways and corridors to highlight residential, commercial and hospitality architecture.



WS-W15312-30-BK



12" LED OUTDOOR SCONCE


- Front, top and bottom illumination
- Ceramic silk-screen mitered glass diffuser
- Top and bottom light individually rotatable
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K/3500K/4000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 50,000 hours
 Input: 120V/277V

WS-W15312-30, WS-W15312-35, WS-W15312-40:
 Size: 12" Watt: 23W
 LED Lumens: 1,367
 Delivered Lumens: Up to 929

Finish

BK:
 Black
 Example: **WS-W15312-30-BK**

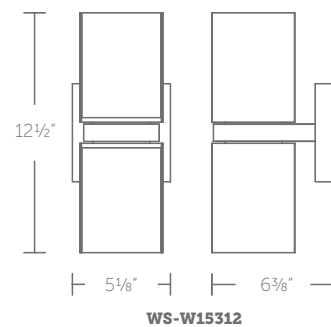

Bollards provided by
 WAC Landscape Lighting



“ Mutual independence. Each segment can be rotated individually, casting light up, down and out. ”

WS-W15312-30-BK shown



“ Squarely there. A harmonious outline capturing etched diffusers shining with a uniform glow. ”

WS-W39316-BK shown



WS-W39305-BK



WS-W39310-BK



WS-W39316-BK




5", 10" & 16" LED OUTDOOR SCNCE

- Illumination on five sides with acrylic diffuser
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 10% TRIAC
 Rated Life: 60,000 hours
 Input: 120V




WS-W39305

WS-W39305: Size: 5" Watt: 10W
 LED Lumens: 950
 Delivered Lumens: 443

WS-W39310: Size: 10" Watt: 20W
 LED Lumens: 2,405
 Delivered Lumens: 1,121

WS-W39316: Size: 16" Watt: 30W
 LED Lumens: 4,310
 Delivered Lumens: 2,009

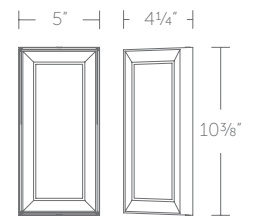


WS-W39310

Finish



Example: **WS-W39316-BK**

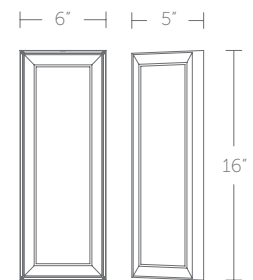

WS-W39316

REVELS



WS-W13324-30-BK WS-W13336-30-BK WS-W13348-30-BK WS-W13360-30-BK WS-W13372-30-BK



24", 36", 48", 60" & 72" LED OUTDOOR SCONCE

- Illumination on both sides with acrylic diffuser
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- ACLED driverless technology
- May be mounted on wall in all orientations



Color Temp: 3000K/3500K/4000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 54,000 hours
 Input: 120V

WS-W13324-30, WS-W13324-35, WS-W13324-40:
 Size: 24" Watt: 13W
 LED Lumens: 300 Delivered Lumens: 193

WS-W13336-30, WS-W13336-35, WS-W13336-40:
 Size: 36" Watt: 17W
 LED Lumens: 400 Delivered Lumens: 256

WS-W13348-30, WS-W13348-35, WS-W13348-40:
 Size: 48" Watt: 24W
 LED Lumens: 555 Delivered Lumens: 358


WS-W13360-30, WS-W13360-35, WS-W13360-40:
 Size: 60" Watt: 28W
 LED Lumens: 665 Delivered Lumens: 428

WS-W13372-30, WS-W13372-35, WS-W13372-40:
 Size: 72" Watt: 28W
 LED Lumens: 850 Delivered Lumens: 547

Finish



Example: **WS-W13348-30-BK**

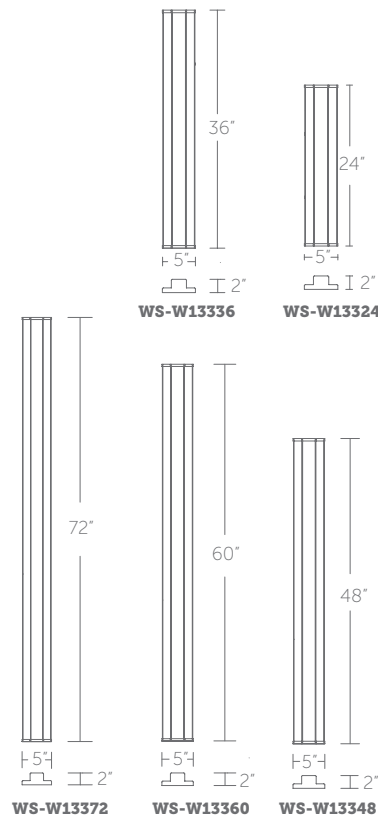


“Balanced with geometric precision. A slim bar of light glowing between the lines of a minimal profile.”

shown



“ Like a beacon in the night, soft illumination beckons through a cylinder of hammered glass. ”

WS-W49314-BK shown

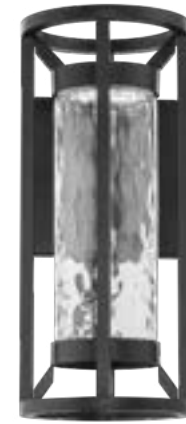

WS-W49314-BK



WS-W49319-BK

ROSLYN

14" & 19" LED OUTDOOR SCONCE



- Downlight with clear hammered glass
- ACLED driverless technology

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 54,000 hours
 Input: 120V

WS-W49314: Size: 14" Watt: 13W
 LED Lumens: 1,000 Delivered Lumens: 688


WS-W49319: Size: 19" Watt: 16W
 LED Lumens: 1,247 Delivered Lumens: 858



Finish



Example: **WS-W49314-BK**

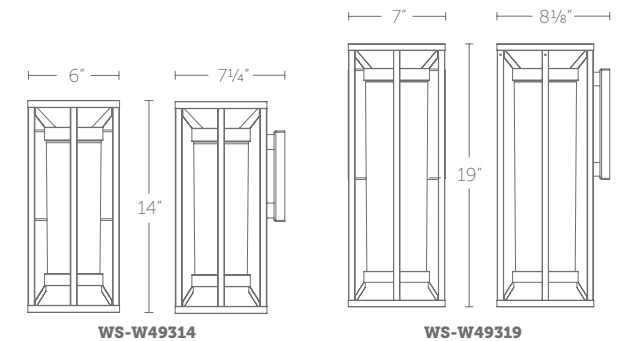

WS-W49314

WS-W49319



WS-W47318-30-BK



18" LED OUTDOOR SCONCE

- Top and bottom illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Diamond shaped canopy can cover 4" round junction box and smaller
- Thin canopy conceals a proprietary 120V/277V driver

Color Temp: 3000K/3500K/4000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 50,000 hours
 Input: 120V/277V


WS-W47318-30, WS-W47318-35, WS-W47318-40:
 Size: 18" Watt: 12W
 LED Lumens: 252
 Delivered Lumens: Up to 108

Finish



BK:
Black

Example: **WS-W47318-30-BK**

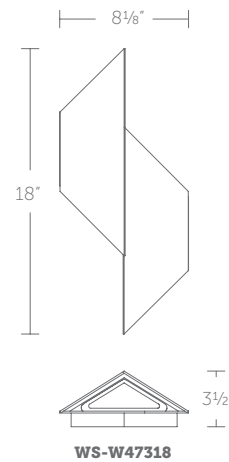

“ Giving style a new slant. Architectural design delivering up and downward illumination from smoothly angled planes. ”

WS-W47318-30-BK shown



“ Precision, framed. A sleek design with sophisticated up and downward illumination. ”

WS-W17310-35-BK shown



WS-W17310-30-WT



WS-W17310-30-BK



WS-W17310-30-AL

EDGEY

10" LED OUTDOOR SCONCE



- Top and bottom illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- ACLED driverless technology
- May be mounted vertically or upside down

Color Temp: 3000K/3500K/4000K
 CRI: 90
 Dimming: 100% - 5% ELV, 100% - 5% TRIAC
 Rated Life: 60,000 hours
 Input: 120V


WS-W17310-30, WS-W17310-35, WS-W17310-40:

Size: 10" Watt: 13W
 LED Lumens: 765 Delivered Lumens: 313

Finish

- AL:** Brushed Aluminum
- BK:** Black
- WT:** White

Example: **WS-W17310-30-BK**



WS-W17310

ALPHABETICAL INDEX

A

ALTERNATE 100-101
ARGO 94-95

C

CALIBER 88-89
CARAFE 6-7
CHANTILLY 16-17
CUBOID 86-87

D

DOME 24-25
DUPLEX 72-73, 74-75

E

EDGEY 102-103
ELBO 76-77
ENIGMATIC 46-47

G

GEOMETRIX 22-23
GLAMOUR 62-63

I

ICE CUBE 28-29
INTERLACE 43

J

JEDI (MINI PD) 32-33
JEDI (PD) 30-31, 34-35
JEDI (WS) 52-53, 64-65
JULIET 56-57

L

LACEY 4-5
LOOPHOLE 50-51
LOYD 78-79

M

MINIBAR 54-55
MOONSTONE 14-15

N

NOUVEAU 60-61

P

PARALLAX (FM) 84-85
PARALLAX (PD) 36-37, 38-39
PARALLAX (WS) 48-49
PARK AVENUE 10-11, 12-13

R

REED 80-81
REVELS 96-97
RINGLET 26-27
ROSLYN 98-99

S

SALTAIRE 66-67
SOLITAIRE 40-41
SOLO 18-19, 20-21
STRUM 8-9

V

VAIATION 92-93
VOLGA 68-69
VORNADO 42

NUMERICAL INDEX

B

BL-67305	72-73
BL-67320	74-75
BL-69317	78-79
BL-73314	76-77

F

FM-73116	84-85
FM-W36607	88-89
FM-W71310	86-87

P

PD-19324	18-19
PD-19348	20-21
PD-21324	40-41
PD-23316	6-7
PD-25314	16-17
PD-27308	26-27
PD-29308	28-29
PD-33312	12-13
PD-33331	10-11
PD-35320	8-9
PD-37310	24-25
PD-43310	14-15
PD-45316	4-5
PD-45322	4-5
PD-47828	43
PD-47839	43
PD-51315	32-33
PD-51322	32-33
PD-51327	34-35
PD-51344	30-31
PD-57317	22-23
PD-57327	22-23
PD-73128	38-39
PD-73134	36-37
PD-87720	42
PD-87723	42
PD-87735	42
PL-11017	80-81
PL-11025	80-81
PL-11033	80-81
PL-11042	80-81

W

WS-35020	56-57
WS-35027	56-57
WS-51313	64-65
WS-51320	52-53
WS-51327	52-53
WS-53318	62-63
WS-55318	68-69
WS-59324	46-47
WS-61326	50-51
WS-61334	50-51
WS-63322	66-67
WS-65323	60-61
WS-73120	48-49
WS-73127	48-49
WS-75318	54-55
WS-75328	54-55
WS-W13324	96-97
WS-W13336	96-97
WS-W13348	96-97
WS-W13360	96-97
WS-W13372	96-97
WS-W15312	92-93
WS-W17310	102-103
WS-W39305	94-95
WS-W39310	94-95
WS-W39316	94-95
WS-W47318	100-101
WS-W49314	98-99
WS-W49319	98-99

Headquarters

Tel: 800.526.2588
Fax: 800.526.2585

44 Harbor Park Dr
Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway
Suite 100
Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities in large quantities. For up to date product specifications and assistance please visit wacighting.com or call **1-800-526-2588**

Many designs within are patented or patent pending. WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe that its intellectual property is being infringed.

Copyright © 2023 by WAC Lighting.
All rights reserved. This catalog is copyrighted and WAC Lighting will use all measures available to it under the law against anyone who copies or derives from its copyrighted work.

Copyright © 2023 by WAC Lighting.
All rights reserved. This catalog is copyrighted and WAC Lighting
will use all measures available to it under the law against anyone
who copies or derives from its copyrighted work.

dweLED

