



WAC
LANDSCAPE LIGHTING

ABOUT WAC LANDSCAPE LIGHTING

Dream it. Solve it. Make it.

WAC LIGHTING is a second generation family-owned and operated lighting company with a reputation for quality spanning 40 years. We have a history of inventing and making innovation widely available to the market through competitive pricing and reputable distribution partnerships.

Our choice has consistently been to operate at a higher level of responsibility, giving our customers the true benefits of a world class factory-owned relationship.

Headquartered in New York, we have factories in New York, California, Georgia, and use a dedicated factories in Asia to support a comprehensive research, design, engineering, electronics, fabrication, manufacturing, and testing operation worldwide.

WAC LANDSCAPE LIGHTING is an expansion of our lighting technology brand to offer ground-breaking patented solutions to the irrigation and green industry that address problems currently not addressed by other landscape lighting companies.

Table of Contents

12V LANDSCAPE LIGHTING

LED Grand Accent	5-6
LED Accent	7-8
LED Mini Accent	9-12
LED Interbeam	13-14
LED Adjustable Beam Wall Wash	15-16
LED Wall Wash	17-18
LED Mini Wall Wash	19-20
LED 3" In-Ground	21-24
LED Underwater Spot	25-26
LED Submersible 2" Ingrounds	27-28
LED Recessed Ingrounds + Indicator	29-32
LED ESTRELLA Pendant Ceiling Light	33-34
LED Cylinder Wall Mount	25-36
LED Surface Mount Indicator	37-38
LED Hardscape.....	39-42
LED Path Lights	43-68
LED Bollards	69-79

12V LED Outdoor Tape Light	80-82
24V LED Outdoor Tape Light	83-88
LED Deck & Patio.....	89-90
LED Step Lights	91-96
Transformers/Accessories	97-98

120V EXTERIOR

LED DIRECT WIRE LIGHTING

LED Landscape	99-100
LED Brick Lights.....	101-102
LED Flood Lights	103-108
LED Wall Packs	109-110
LED Decorative	111-114
Photometrics.....	115-125

WHAT HAVE WE DONE FOR YOU LATELY?

Our Newest Patented Products Solve Everyday Challenges

Adjustable Beam Wall Wash

FLEXIBILITY/OPTIONS

Multiple OPTIONS for FLEXIBILITY:

Marine-grade Brass or Corrosion Resistant Aluminum Bronze or Black finishes.

2700K, 3000K, or 4000K

12V or 120V

Color lens & optical lens option

Tree mount, wall mount option

Suitable for use as a Wall Wash Light



BRIGHTNESS

Fixture lumen output range of 200lm to 1500lm can be accomplished. In wattage, this translates to a range from 3W to 25W of LED power. This is all accomplished with a screwdriver for brightness adjustment.


BEAM ANGLE

Architectural beam distributions from 3x4 to 4x5 to 5x6 proportions and everything in between. Rotatable fixture head for vertical distribution. Always a uniform wide beam wash of light.

NEMA 4X3: 60 degrees by 35 degrees

NEMA 5X4: 90 degrees by 60 degrees

NEMA 6X5: 120 degrees by 90 degrees

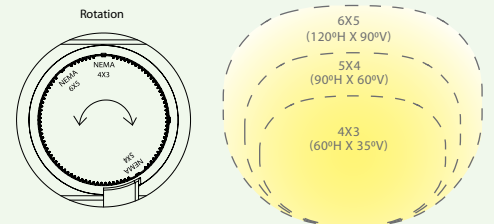

Hardscape Quick Release

BRIGHTNESS

Fixture lumen output range of 10lm to 350lm can be accomplished. In wattage, this translates to a range from 0.5W to 8.5W of LED power. This is all accomplished with a screwdriver for brightness adjustment.

QUICK RELEASE SERVICEABILITY

Based on popular demand, our new patented invention allows for a watertight male/female connection at the fixture for ease of replacement after it is installed.


FLEXIBILITY/OPTIONS

Multiple OPTIONS for FLEXIBILITY:

Marine-grade Brass or Corrosion Resistant Aluminum Bronze, Graphite, or Sand finishes.

Select color temperature option : 2700K or 3000K

Removable stainless steel capstone bracket and rotating mounting clips included



Durability. Flexibility. Guaranteed.

Every WAC Lighting® fixture in our patented line of technology landscape products is thoroughly tested in our nationally recognized NVLAP, UL, and ETL certified laboratories for safety, durability, and robust long term performance, even in the most rugged environments.

LED Life Expectancy

Rated life of LED lights is based on IES (Illuminating Engineering Society) L70 standard accelerated lifetime testing for how long they will operate until only 70% of the original light output remains.

 Listed to UL 1838 standard (12V) | 1598 standard (120V)

DO YOU HAVE WHAT YOU NEED?

OURS | Just three continuously adjustable lights perfectly illuminate small to giant objects everytime.



Adjustable 10° to 50° beam
Power from 7W to 1W
Dims from 365 lumens to 45 lumens



Adjustable 10° to 60° beam
Power from 16W to 2W
Dims from 1045 lumens to 190 lumens




Adjustable 15° to 60° beam
Power from 33W to 15W
Dims from 2000 lumens to 740 lumens

Others are mostly available as low as 100 lumens, which may still be too bright for certain applications at night

Covers most commonly needed accent lighting applications

Other landscape accent lights offer below 1000 lumens

OTHERS | Each light needs to be ordered specifically for fixed beam angles and brightness levels.

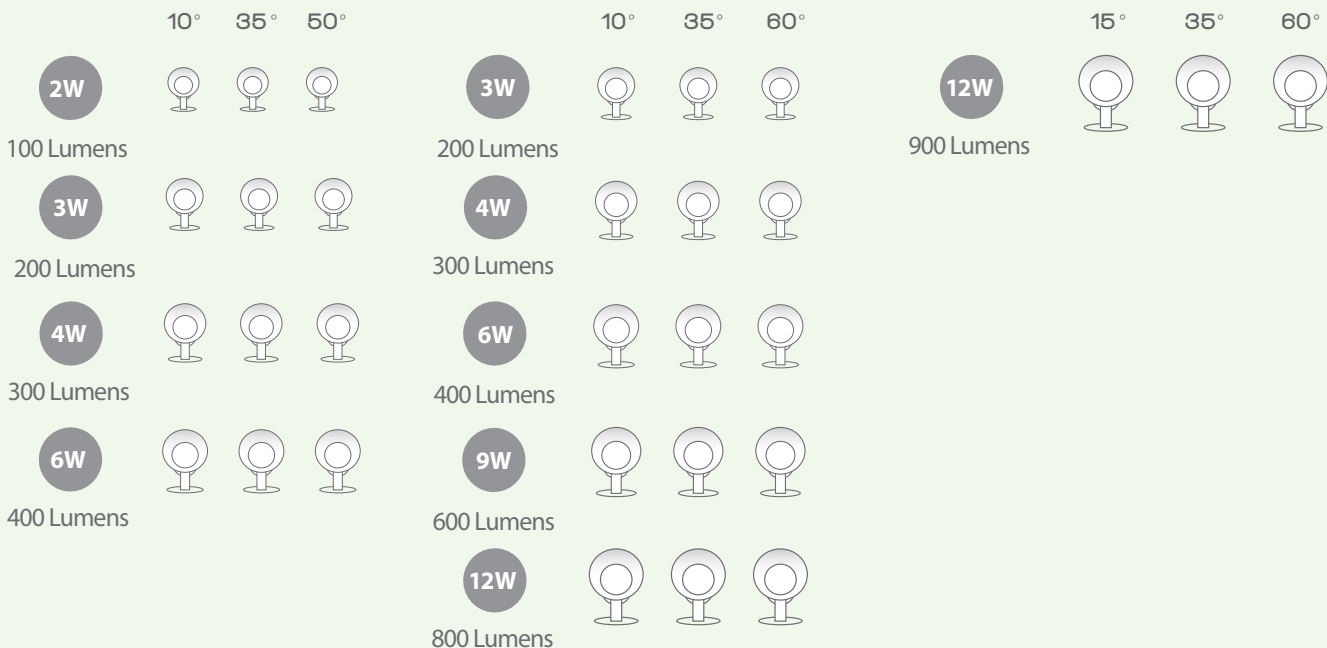

It's All About the DETAILS

Gone are the appearance of many glary LED dots.
Quality LED illumination comparable to incandescent
without the pain of a high electricity bill.



Continuously Adjustable Brightness Control



Easy Adjustability

Twist the collar to change beam angle. Use a flat or philips head screw driver to adjust brightness and lock aiming direction.

Materials That Mean Business

Unlike other brands of landscape lighting, we actually fabricate each component of each product using the best UV stabilized and corrosion resistant materials available to be able to confidently support a true 10 year warranty.

Marine Grade Die-cast Stainless Steel
Bronze Finished Stainless Steel

Die-cast Corrosion Resistant Aluminum Alloy
Robust Powder coated Bronze and Black Finishes

Die-cast or Machined Marine-Grade Brass
Bronze Finish



THE GRAND ACCENT LED LANDSCAPE

MOONLIGHTING EFFECT

Introducing the first landscape accent lights to deliver up to 2000 lumens of light output. When mounted high in trees and pointing downward, Grand Accent creates a beautiful moonlighting effect with a cool white light and superior lumen output.

- New 4000K color temperature option resembles moonlight
- Adjustable beam 15° to 60°
- Continuously adjustable lumen output 740–2000 lm
- Integral brightness control
- One fixture replaces various halogen accent lights with a much higher wattage



visit product
page online

THE GRAND ACCENT LED LANDSCAPE

PATENTED

IP66



1838 listed
1598 listed

12V

Input 9-15VAC
Power 15W to 33W / 21VA -44VA
Brightness 740 lm to 2000 lm
Beam Angle 15° to 60°
CRI 85
Rated Life 45,000 hours

2700K Warm White

5211-27
BK Black on Aluminum
BZ Bronze on Aluminum
BBR Bronze on Brass

3000K Pure White

5211-30
BK Black on Aluminum
BZ Bronze on Aluminum
BBR Bronze on Brass

4000K Cool White

5211-40
BK Black on Aluminum
BZ Bronze on Aluminum
BBR Bronze on Brass

120V

Input 120VAC
Power 13W to 31W / 23VA -48VA
Brightness 780 lm to 2050 lm
Beam Angle 15° to 60°
CRI 85
Rated Life 45,000 hours

3000K Pure White


5212-30
BK Black on Aluminum
BZ Bronze on Aluminum
BBR Bronze on Brass

4000K Cool White

5212-40
BK Black on Aluminum
BZ Bronze on Aluminum
BBR Bronze on Brass



See photometric data on pages 115-116

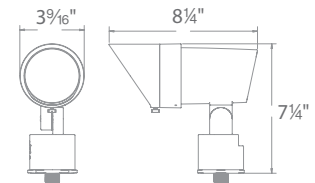

Accessories

5" Long Shroud		5211-LSHR-BK 5211-LSHR-BZ 5211-LSHR-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application
Grand Accent Snoot		5211-SNOOT-BK 5211-SNOOT-BZ 5211-SNOOT-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application
Mounting Stake		9000-ST9-BZ 9000-ST14-BZ	Bronze Bronze	9" Durable PC stake 14" Durable PC stake
Power Stake		M6000-STAKE	Black	Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Black on Aluminum Bronze on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)
		5000-STB-BK	Black on Steel	Tree mount bracket only
Extension Rods		5000-X04-BZ,BK,BBR 4 in 5000-X08-BZ,BK,BBR 8 in 5000-X12-BZ,BK,BBR 12 in	5000-X18-BZ,BK,BBR 18 in 5000-X24-BZ,BK,BBR 24 in	Extends distance between Accent light and surface mount canopy, stake, or tree mount box
Optics		LENS-25-AMB Amber LENS-25-GRN Green LENS-25-RED Red	LENS-25-BLU Blue LENS-25-FR Frosted LENS-25-SPR Spread	5211-HCL Honeycomb Lens LENS-25-BEL Elongating Beam

9" Mounting stake (12V), Detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

ACCENT LED LANDSCAPE

- Continuously Adjustable Beam Angles
Indexed at 10°, 25°, 40°, 60°

- Continuously Adjustable Brightness Control
Indexed at 1W, 2W, 8W, 15W, 18W



visit product
page online

ACCENT LED LANDSCAPE

PATENTED

IP66



1838 listed
1598 listed

12V

- Both fixture level dimming and circuit level dimming
- Dim each circuit from either the 12V or 120V side
- Adjustable beam angle 10° to 60°

Input	9-15V
Power	1W to 18W/2VA-23VA
Brightness	50lm to 1160lm
Beam Angle	10° to 60°
CRI	85
Rated Life	70,000 hours

5011-27 2700K	BK Black on Aluminum
5011-30 3000K	BZ Bronze on Aluminum
5011-40 4000K	BBR Bronze on Brass

120V


- Adjustable beam angle 15° to 60°
- Simple to retrofit existing line voltage systems or coordinate well with a new commercial landscape job

Input	110V-120V
Power	3.5W to 14.5W
Brightness	100lm to 900lm
Beam Angle	15° to 60°
CRI	85
Rated Life	45,000 hours

5012-30 3000K	BK Black on Aluminum
	BZ Bronze on Aluminum
	BBR Bronze on Brass



See photometric data on pages 117-118

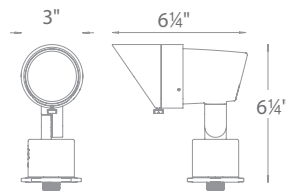

Accessories

6" Long Shroud		5010-LSHR-BK 5010-LSHR-BZ 5010-LSHR-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduces glare; ideal for downlighting application		
Accent Snoot		5010-SNOOT-BK 5010-SNOOT-BZ 5010-SNOOT-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduces glare; ideal for downlighting application		
Mounting Stake		9000-ST9-BZ 9000-ST14-BZ	Bronze Bronze	9" Durable PC stake 14" Durable PC stake		
Power Stake		M6000-STAKE	Black	Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.		
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box		
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture		
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Black on Aluminum Bronze on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture		
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed		
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed		
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)		
		5000-STB-BK	Black on Steel	Tree mount bracket only		
Extension Rods		5000-X04-BZ,BK,BBR	4 in	5000-X18-BZ,BK,BBR	18 in	Extends distance between Accent light and surface mount canopy, stake, or tree mount box
		5000-X08-BZ,BK,BBR	8 in	5000-X24-BZ,BK,BBR	24 in	
		5000-X12-BZ,BK,BBR	12 in			
Optics		LENS-20-AMB	Amber	LENS-20-BLU	Blue	5011-HCL Honeycomb Lens LENS-20-BEL Elongating Beam
		LENS-20-GRN	Green	LENS-20-FR	Frosted	
		LENS-20-RED	Red	LENS-20-SPR	Spread	

9" Mounting stake (12V), Detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

MINI ACCENT LED LANDSCAPE

- Adjustable beam angle
- IP66 Rated, protected against high-pressure water jets
- Includes a detachable shroud
- Solid die-cast brass or corrosion resistant aluminum
- Factory sealed watertight fixtures
- Constant output for 9V-15V input
- Can be used as an uplight or downlight
- 2700K or 3000K color temperature



- Continuously Adjustable Brightness Control
Indexed at 1W, 2W, 4W, 6W, 7W

- Continuously Adjustable Beam Angles
Indexed at 10°, 25°, 40°, 50°



visit product
page online

MINI ACCENT LED LANDSCAPE


PATENTED  
 IP66 **UL** us
 1838 listed

12V

- Integral brightness control
- Adjustable beam angle 10° to 50°
- One fixture replaces all older halogen landscape accent light.

Transformer Required (order separately)


Input	9-15VAC
Power	1W to 7W / 2VA -7.6VA
Brightness	45 lm to 365 lm
Beam Angle	10° to 50°
CRI	85
Rated Life	70,000 hours



Shown with gutter mount bracket accessory



Continuously adjustable brightness control



Single and Double stem mount available. See pages 11-12

2700K

Warm White

5111-27

- BK** Black on Aluminum
- BZ** Bronze on Aluminum
- BBR** Bronze on Brass


3000K

Pure White







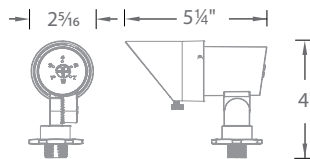




5111-30

- BK** Black on Aluminum
- BZ** Bronze on Aluminum
- BBR** Bronze on Brass

See photometric data on page 119




Accessories

5" Long Shroud		5111-LSHR-BK 5111-LSHR-BZ 5111-LSHR-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application		
Mini Accent Snoot		5111-SNOOT-BK 5111-SNOOT-BZ 5111-SNOOT-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application		
Mounting Stake		9000-ST9-BZ 9000-ST14-BZ	Bronze Bronze	9" Durable PC stake 14" Durable PC stake		
Power Stake		M6000-STAKE	Black	Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.		
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box		
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture		
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Black on Aluminum Bronze on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture		
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed		
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed		
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)		
		5000-STB-BK	Black on Steel	Tree mount bracket only		
Extension Rods		5000-X04-BZ,BK,BBR	4 in	5000-X18-BZ,BK,BBR	18 in	Extends distance between Accent light and surface mount canopy, stake, or tree mount box
		5000-X08-BZ,BK,BBR	8 in	5000-X24-BZ,BK,BBR	24 in	
		5000-X12-BZ,BK,BBR	12 in			
Optics		LENS-16-AMB	Amber	LENS-16-BLU	Blue	5111-HCL Honeycomb Lens LENS-16-BEL Elongating Beam
		LENS-16-GRN	Green	LENS-16-FR	Frosted	
		LENS-16-RED	Red	LENS-16-SPR	Spread	

9" Mounting stake (12V), detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) included

MINI ACCENT LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

MINI ACCENT LED PATH

PATENTED

IP66



1838 listed

12V

- Includes 6", 12" and 24" extensions
- IP66 Rated, protected against high-pressure water jets
- 10°-50° beam adjustability
- Continuously adjustable beam angles and brightness control
- Detachable shroud
- Constant output for 9V-15V input

Transformer Required (order separately)

SINGLE

Input	9-15VAC
Power	1W to 7W/2VA-7.6VA
Brightness	45lm to 365lm
Color Temp	2700 & 3000k
CRI	85
Rated Life	70,000 hours

2700 & 3000K Warm and Pure White

Single

6111-27	BZ	Bronze on Aluminum
6111-30	BBR	Bronze on Brass


2700 & 3000K Warm and Pure White

Double


6211-27	BZ	Bronze on Aluminum
6211-30	BBR	Bronze on Brass

DOUBLE

Input	9-15VAC
Power	1W to 7W/2VA-7.6VA x2
Brightness	45lm to 365lm x2
Color Temp	2700 & 3000k
CRI	85
Rated Life	70,000 hours

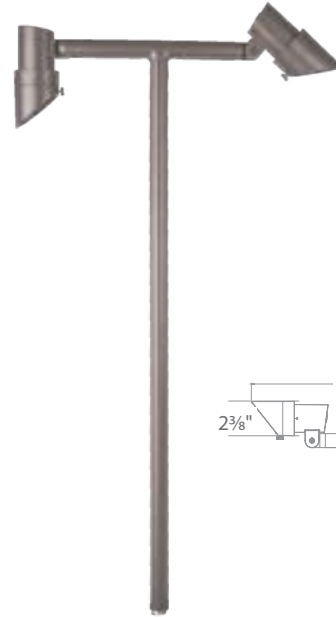


6211

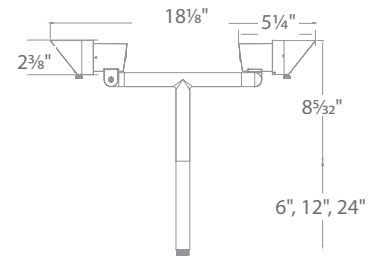


Example: 6111-30BBR

Guardian mount, 6 foot lead wire, and direct burial gel filled wire nuts included

See photometric data on page 119

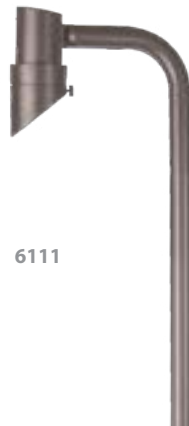


6111

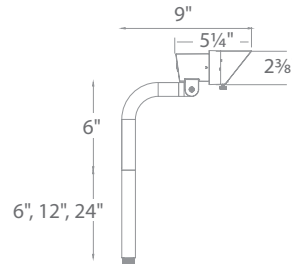

Accessories

5" Long Shroud		5111-LSHR-BK 5111-LSHR-BZ 5111-LSHR-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

INTERBEAM LED LANDSCAPE



visit product
page online


12V

- MLV Dimmable (remote MLV dimmer)
 - Adjustable beam angle 20° to 60°
 - One adjustable light replaces many standards lights in various sizes and styles
- Transformer Required (order separately)*







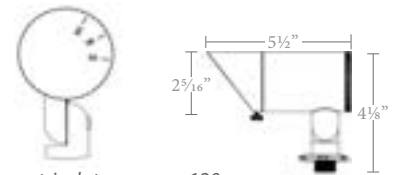






Input Power	9-15VAC 6W/7.7VA	Input Power	9-15VAC 3W/5.5VA
Brightness	475lm	Brightness	245lm
Beam Angle	20° to 60°	Beam Angle	20° to 60°
CRI	85	CRI	85
Rated Life	70,000 hours	Rated Life	70,000 hours

2700K	Warm White	2700K	Warm White
5311-27	BK Black on Aluminum	5411-27	BK Black on Aluminum
	BZ Bronze on Aluminum		BZ Bronze on Aluminum
3000K	Pure White	3000K	Pure White
5311-30	BK Black on Aluminum	5411-30	BK Black on Aluminum
	BZ Bronze on Aluminum		BZ Bronze on Aluminum



See photometric data on page 120

Accessories

5" Long Shroud		5111-LSHR-BK 5111-LSHR-BZ	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application
Mini Accent Snoot		5111-SNOOT-BK 5111-SNOOT-BZ	Black on Aluminum Bronze on Aluminum Bronze on Brass	Reduce glare; ideal for downlighting application
Mounting Stake		9000-ST9-BZ 9000-ST14-BZ	Bronze Bronze	9" Durable PC stake 14" Durable PC stake
Power Stake		M6000-STAKE	Black	Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box.
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Black on Aluminum Bronze on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; Two 1/2" NPT threaded holes, UL 120V Listed
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)
		5000-STB-BK	Black on Steel	Tree mount bracket only
Extension Rods		5000-X04-BZ,BK,BBR 4 in 5000-X08-BZ,BK,BBR 8 in 5000-X12-BZ,BK,BBR 12 in	5000-X18-BZ,BK,BBR 18 in 5000-X24-BZ,BK,BBR 24 in	Extends distance between Accent light and surface mount canopy, stake, or tree mount box
Optics		LENS-16-AMB Amber LENS-16-GRN Green LENS-16-RED Red	LENS-16-BLU Blue LENS-16-FR Frosted LENS-16-SPR Spread	5111-HCL Honeycomb Lens LENS-16-BEL Elongating Beam

Mounting stake (12V), detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) included

ADJUSTABLE BEAM WALL WASH LED LANDSCAPE

WITH BEAM AND INTEGRAL BRIGHTNESS CONTROL

- Continuously adjustable NEMA beam distribution 3x4 (35°x60°), 4x5 (60°x90°), 5x6 (90°x120°)
- IP66 Rated, protected against powerful water jets
- Solid die-cast brass or corrosion resistant aluminum alloy



Architectural beam distributions from 3x4 to 4x5 to 5x6 proportions and everything in between. Always a uniform wide beam wash of light.







NEMA 5x4

NEMA 4x5



visit product page online

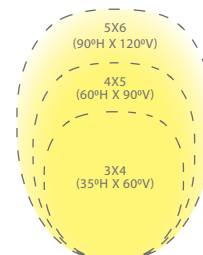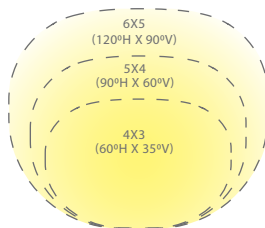

ADJUSTABLE BEAM WALL WASH LED LANDSCAPE PATENTED WITH BEAM AND INTEGRAL BRIGHTNESS CONTROL



12V

- Continuously adjustable NEMA beam distribution 3x4 (35°x60°), 4x5 (60°x90°), 5x6 (90°x120°)
- Integral brightness control
- Rotatable fixture head for vertical distribution

Transformer Required (order separately)

Input Power	9 - 15VAC
Brightness	3W to 25W/4.4VA-27.8VA
Beam Angle	200 lm to 1500 lm
CRI	Assorted NEMA distributions
Rated Life	85
	70,000 hours

5221-27 2700K	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

5221-30 3000K	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass


120V

- Continuously adjustable NEMA beam distribution 3x4 (35°x60°), 4x5 (60°x90°), 5x6 (90°x120°)
- Integral brightness control
- Simple to retrofit existing line voltage systems or coordinate well with a new commercial landscape job

Input Power	110V - 120VAC
Brightness	3W to 25W
Beam Angle	200 lm to 1550 lm
CRI	Assorted NEMA distributions
Rated Life	85
	45,000 hours

5222-27 2700K	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

5222-30 3000K	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

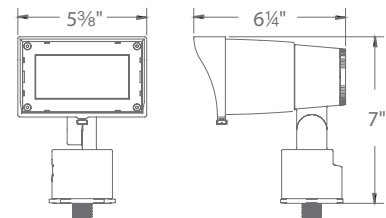

Architectural beam distributions from 3x4 to 4x5 to 5x6 proportions and everything in between.

Always a uniform wide beam wash of light.

See photometric data on pages 125

Accessories

14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7-inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Black on Aluminum Bronze on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap for use with Tree Mount Junction Box (5000-TCL)
		5000-STB-BK	Black on Steel	Tree mount bracket only
Optics		LENS-3X5-AMB LENS-3X5-GRN LENS-3X5-RED	Amber Green Red	LENS-3X5-BLU Blue LENS-3X5-FR Frosted LENS-3X5-SPR Spread
		LENS-3X5-BEL 5221-HCL		Elongating Beam Honeycomb Lens

14" Mounting stake (12V), detachable shroud, 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

WALL WASH LED LANDSCAPE

- A uniform wide distribution wall wash from a small form factor
- IP66 Rated, protected against powerful water jets
- Solid die-cast brass or corrosion resistant aluminum alloy
- Factory sealed watertight fixtures
- Constant output for 9V-15V, 110V - 120V inputs

- Even Coverage at 15° Upwards, 50° x 80°

- Continuously Adjustable Brightness Control
Indexed at 2W, 4W, 8W, 13W, 16W



visit product
page online

WALL WASH LED LANDSCAPE

PATENTED

IP66



1838 listed
1598 listed

12V

- Integral brightness control

Input	9 - 15VAC
Power	2W to 16W / 2 - 23VA
Brightness	190 lm to 980 lm
Beam Angle	15° upward (50° by 80°)
CRI	85
Rated Life	70,000 hours

2700K Warm White

5021-27	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

3000K Pure White

5021-30	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass

120V

- Integral brightness control


Input	110V - 120VAC
Power	3.5W to 14.5W
Brightness	95 lm to 855 lm
Beam Angle	15° upward (50° by 80°)
CRI	85
Rated Life	45,000 hours

3000K Pure White

5022-30	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	BBR	Bronze on Brass





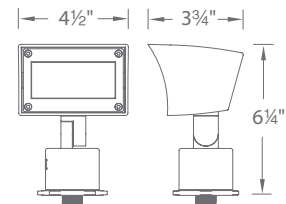







See photometric data on page 124



Transformer Required (order separately)

Accessories

Mounting Stake		9000-ST9-BZ 9000-ST14-BZ	Bronze Bronze	9" Durable PC stake 14" Durable PC stake
Power Stake		M6000-STAKE	Black	Easy wiring accessory designed for 120V products; eliminates the need for a separate J-box
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture
Gutter Mount Bracket		5000-GM-BZ 5000-GM-BK	Stainless Steel Black on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with Stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)
		5000-STB-BK	Black on Steel	Tree mount bracket only
Extension Rods		5000-X04-BZ,BK,BBR 4 in 5000-X08-BZ,BK,BBR 8 in 5000-X12-BZ,BK,BBR 12 in	5000-X18-BZ,BK,BBR 18 in 5000-X24-BZ,BK,BBR 24 in	Extends distance between Accent light and surface mount canopy, stake, or tree mount box
Rod L-Coupler		5000-LCO-BK 5000-LCO-BZ	Black Bronze	
Wall Wash Optics		LENS-2X4-AMB Amber LENS-2X4-GRN Green LENS-2X4-RED Red	LENS-2X4-BLU Blue LENS-2X4-FR Frosted LENS-2X4-SPR Spread	5021-HCL Honeycomb Lens

9" Mounting stake (12V), 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

MINI WALL WASH LED LANDSCAPE

WITH DUAL CCT AND INTEGRAL BRIGHTNESS CONTROL

- Select color temperature option
- IP66 Rated, protected against powerful water jets
- Solid die-cast brass or corrosion resistant aluminum alloy



visit product
page online

MINI WALL WASH LED LANDSCAPE

WITH DUAL CCT AND INTEGRAL BRIGHTNESS CONTROL

PATENTED



1838 listed

12V

- Transformer required (order separately)
- Integral brightness control. Select color temperature option
- Mounting stake and direct burial gel-filled wire nuts all included




See photometric data on page 124

Input:	9-15VAC
Power:	1W to 8W / 2-12VA
Lumens:	80 lm to 420 lm
Beam Angle:	Symmetrical (70° by 95°)
CRI:	85
Rated Life:	60,000 hours
CCT:	2700K & 3000K
	Warm White & Pure White

2700 & 3000K Warm and Pure White





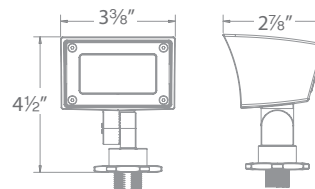



BK	Black on Aluminum
BZ	Bronze on Aluminum
BBR	Bronze on Brass

5121-27/30



A uniform wide distribution wall wash from a small form factor

Accessories

Mounting Stake		9000-ST9-BZ 9000-ST14-BZ	Bronze	Durable PC stake	
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box	
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture;	
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Black on Aluminum Bronze on Aluminum	Stainless steel universal mounting bracket for gutter mounting fixture	
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Black on Aluminum Bronze on Aluminum	Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed	
		5000-TCL-BK 5000-TCL-BZ	Black on Aluminum Bronze on Aluminum	Large aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V Listed	
Large Tree Mount Canopy Strap		5000-TST-BK	Black on Steel/terylene	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)	
		5000-STB-BK	Black on Steel	Tree mount bracket only	
Extension Rods		5000-X04-BZ,BK,BBR 5000-X08-BZ,BK,BBR 5000-X12-BZ,BK,BBR	4 in 8 in 12 in	5000-X18-BZ,BK,BBR 5000-X24-BZ,BK,BBR 18 in 24 in	Extends distance between Accent light and surface mount canopy, stake, or tree mount box
Optics		LENS-2X3-AMB LENS-2X3-GRN LENS-2X3-RED	Amber Green Red	LENS-2X3-BLU LENS-2X3-FR LENS-2X3-SPR Blue Frosted Spread	LENS-2X3-BEL 5121-HCL Elongating Beam Honeycomb Lens

9" Mounting stake (12V), 6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

3" INGROUND LED LANDSCAPE

- Tilt and adjust beam angles
- Integral brightness control
- IP67 Rated, protected from temporary immersion underwater
- Drive over up to 4500lbs
- Solid die-cast brass or corrosion resistant cast aluminum
- Available concrete pour kit
- Constant output for 9V-15V or 110V-120V inputs



visit product
page online

3" Inground Features



Typical Inground

Most light output goes into the air, causing light pollution




Adjust Beam Angles

Presets at 15°, 30°, 45°, 60°



Adjustable WAC Inground

Adjust the light to where you need it




Typical Inground

Most light output goes into the air, causing light pollution




Tilt and Aim

Up to 40° of adjustability preset at -20°, -10°, 0°, 10°, 20°




Adjustable WAC Inground

Adjust the light to where you need it

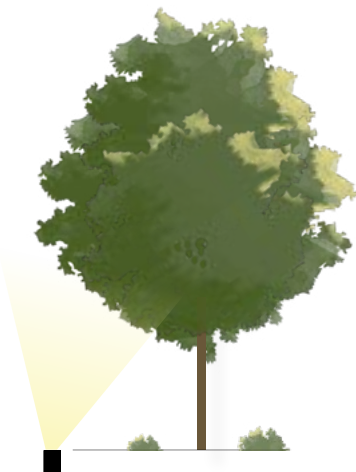

Control Brightness

Adjustable from 70 lm to 505 lm
Presets Comparable to
10W, 25W, 35W, 50W, 75W Halogen source

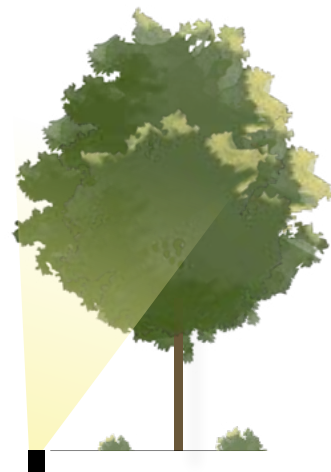

3" INGROUND LED LANDSCAPE



visit product
page online

3" INGROUND LED LANDSCAPE

PATENTED IP67  **us**
 1838 listed
 1598 listed

12V

- Integral brightness control
- Adjustable beam angle
- Directional aim with +/- 20° Tilt

Input 9-15VAC
 Power 2W to 12W / 2-17VA
 Brightness 70 lm to 505 lm
 Beam Angle 15° to 60°
 CRI 85
 Rated Life 55,000 hours

2700K *Warm White*
5031-27 **BZ** Bronze on Aluminum
BBR Bronze on Brass

3000K *Pure White*
5031-30 **BZ** Bronze on Aluminum
BBR Bronze on Brass

Transformer Required (order separately)

120V



- Integral brightness control
- Adjustable beam angle

Input 110V - 120VAC
 Power 3W to 11.5W
 Brightness 65 lm to 515 lm
 Beam Angle 15° to 60°
 CRI 85
 Rated Life 45,000 hours





3000K *Pure White*
5032-30 **BZ** Bronze on Aluminum
BBR Bronze on Brass



See photometric data on pages 121-122



Accessories

Non-slip lens		5030-NSLEN-CL	Clear/patterned	Slip resistant lens
Rock Guard		5030-GRD-BZ 5030-GRD-BBR	Bronze on Aluminum Bronze on Brass	Protects the fixture surface
Optics		LENS-25-AMB LENS-25-GRN LENS-25-RED LENS-25-BLU LENS-25-FR LENS-25-HCL	Amber Green Red Blue Frosted Honeycomb Louver reduces glare	Enhances saturation of florals and foliage
Concrete Pour Kit		5030-PIP-PVC	Shown with temporary dense foam cap	For installation in concrete; five 1/2" NPT threaded holes, PC

6' lead wire and direct burial gel filled wire nuts (12V) or standard wire nuts (120V) included

UNDERWATER SPOT LED LANDSCAPE



visit product
page online

UNDERWATER SPOT LED LANDSCAPE





- Machined brass thumb screws
- Cast brass construction
- IP68 Rated, suitable for continuous immersion
- Underwater in depths up to 3'
- Factory sealed watertight fixtures
- 30' long lead wire
- Limited lifetime warranty

Transformer Required (order separately)

Input	12-15VAC
Power	10W / 11.2VA
Brightness	780 lm
Beam Angle	60°
Color Temp	3000K Pure White
CRI	85
Rated Life	50,000 hours

5511-30 | **NB** Natural Brass

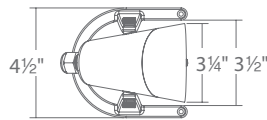

Accessories Submersible luminaires

Wall Wash Optics		LENS-20-AMB Amber LENS-20-GRN Green LENS-20-RED Red	LENS-20-BLU Blue LENS-20-FR Frosted LENS-20-SPR Spread	Enhances saturation of florals and foliage and turtle friendly
Direct Burial Waterproof Wire Nuts		9020-WNT-BK	Silicone filled wire nut with gasket (Pack of 20pcs)	

Detachable shroud and direct burial gel filled wire nuts (12V)

SUBMERSIBLE 2" INGROUND LED LANDSCAPE

- Constant output for 9V-15V input
- 100%-10% dimming - see specification sheet for list of tested dimmers
- May be used in conjunction with all WAC Landscape Lighting products
- Includes a detachable stainless steel mounting bracket for use in or out of water



visit product
page online

SUBMERSIBLE 2" INGROUND LED LANDSCAPE



676 listed

- Solid stainless steel construction
- IP68 Rated, suitable for continuous immersion under water
- Factory sealed watertight fixtures
- 30' long lead wire

Transformer Required (order separately)


Input	9-15VAC
Power	4.1W / 6.6VA
Brightness	245 lm
Beam Angle	25°
Color Temp	3000K
CRI	85
Rated Life	70,000 hours

3000K *Pure White*

2031-30 | **SS** Stainless Steel



Includes stainless steel easy mount accessory for use with underwater applications and above ground on any surface

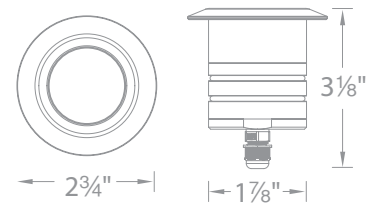

Designed for underwater or wet application
30ft long lead wire

RECESSED INGROUNDS + INDICATOR LED LANDSCAPE

- IP68 Rated, suitable for continuous immersion under water
- Factory sealed watertight fixtures
- Solid stainless steel construction
- Options for use in outdoor downlight applications
- Constant output for 9V-15V input
- 100%-10% dimming - see specification sheet for list of tested dimmers
- Available concrete pour kit with 18" PVC pipe which can be field shortened



visit product
page online

RECESSED INGROUNDS + INDICATOR LED LANDSCAPE



1" APERTURE

Input	9-15VAC	CRI	85
Power	1.9W / 3VA	Beam Angle	50°
Brightness	Up to 80 lm	Rated Life	70,000 hours
Color Temp	2700K Warm white, 3000K Pure white		

Transformer Required (order separately)



1" Slim Round

1011-27 2700K
1011-30 3000K | **SS** Stainless Steel






1" Round

1021-27 2700K
1021-30 3000K | **SS** Stainless Steel



1" Square

1051-27 2700K
1051-30 3000K | **SS** Stainless Steel



1" Scoop

1061-27 2700K | **BS** Bronze Stainless steel
1061-30 3000K | **SS** Stainless Steel






1" Shroud

1031-27 2700K | **BS** Bronze Stainless steel
1031-30 3000K | **SS** Stainless Steel



1" Louver

1041-27 2700K | **BS** Bronze Stainless steel
1041-30 3000K | **SS** Stainless Steel

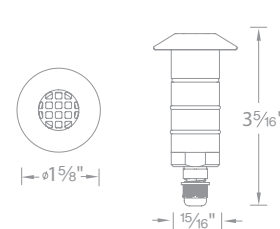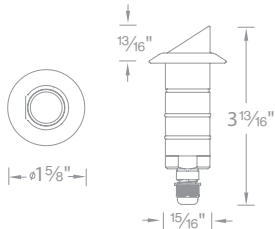

6' Lead Wire included

Optional spring clip accessory included

Optional spring clip accessory included



1000-CON-PVC
1" Concrete Pour Kit

For installation in concrete. 18" PVC pipe included. Installs onto a 4" outdoor rated junction box.

2" RECESSED INGROUNDS + INDICATOR LED LANDSCAPE



2" APERTURE

Input	9-15VAC	Color Temp	2700K Warm white, 3000K Pure white
Power	4.1W / 6.6VA	CRI	85
Brightness	Up to 245 lm	Rated Life	70,000 hours
		Beam Angle	30° (When an open top is used)




Transformer Required (order separately)
 Optional spring clip accessory included
 6' Lead Wire included



2" GROUND HOOD

Beam Angle: *Asymmetrical*

2081-27	2700K	BS	<i>Bronzed Stainless Steel</i>
2081-30	3000K	SS	<i>Stainless Steel</i>

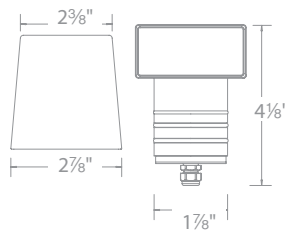

Optional spring clip accessory included

- IP68 Rated, suitable for continuous immersion under water
- Factory sealed watertight fixtures
- Solid stainless steel construction
- Constant output for 9V-15V input
- 10%-100% dimming - see specification sheet for list of tested dimmers
- Available concrete pour kit with 18" PVC pipe which can be field shortened



visit product page online



visit product page online



2000-CON-PVC
 2" Concrete Pour Kit

For installation in concrete.
 18" PVC pipe included. installs onto a 4" outdoor rated junction box.



2" Slim Round

2011-27 2700K **BS** *Bronzed Stainless Steel*
2011-30 3000K **SS** *Stainless Steel*



2" Round

2021-27 2700K **BS** *Bronzed Stainless Steel*
2021-30 3000K **SS** *Stainless Steel*



2" Square

2051-27 2700K **BS** *Bronzed Stainless Steel*
2051-30 3000K **SS** *Stainless Steel*

2" Slim Round with Honeycomb Louver





2012-27 2700K **BS** *Bronzed Stainless Steel*
2012-30 3000K **SS** *Stainless Steel*

2" Round with Honeycomb Louver

2022-27 2700K **BS** *Bronzed Stainless Steel*
2022-30 3000K **SS** *Stainless Steel*

2" Square with Honeycomb Louver

2052-27 2700K **BS** *Bronzed Stainless Steel*
2052-30 3000K **SS** *Stainless Steel*



2" Quad-Directional

2101-27 2700K **BS** *Bronzed Stainless Steel*
2101-30 3000K **SS** *Stainless Steel*








2" Single Direction

2091-27 2700K **BS** *Bronzed Stainless Steel*
2091-30 3000K **SS** *Stainless Steel*



2" Bi-Directional

2071-27 2700K **BS** *Bronzed Stainless Steel*
2071-30 3000K **SS** *Stainless Steel*



2" Scoop

2131-27 2700K **BS** *Bronzed Stainless Steel*
2131-30 3000K **SS** *Stainless Steel*









2" Shroud

2111-27 2700K **BS** *Bronzed Stainless Steel*
2111-30 3000K **SS** *Stainless Steel*



2" Louver

2121-27 2700K **BS** *Bronzed Stainless Steel*
2121-30 3000K **SS** *Stainless Steel*



TREE LIGHTS

New!



visit product
page online

TREE LIGHTS LED LIGHT

12V

New!



1838 listed

Input	9-15VAC
Power	1W to 7.5W / 2VA - 8VA
Brightness	45 lm to 380 lm
Color Temp	2700K / 3000K / 4000K
CRI	85
Rated Life	50,000 hours

Transformer Required (order separately)

3811-27/30/40

BK Black on Aluminum
BZ Bronze on Aluminum

6' Chain included

3821-27/30/40

BK Black on Aluminum
BZ Bronze on Aluminum

6' Chain included

3831-27/30/40

BK Black on Aluminum
BZ Bronze on Aluminum
WT White on Aluminum




3821



3831



3811

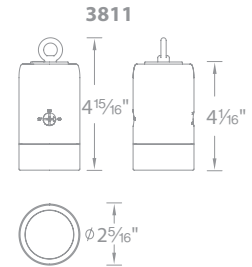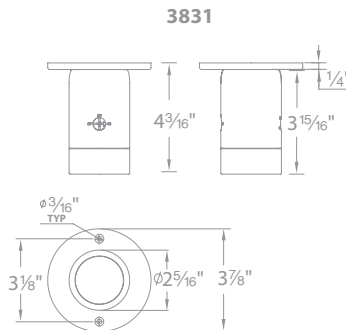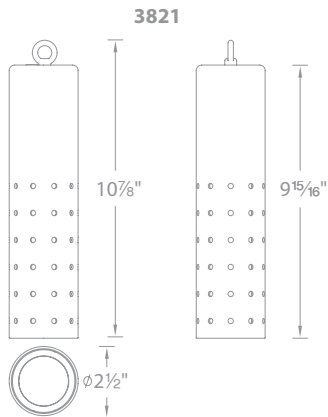

Select Warm White, Pure White, or Cool White (2700K, 3000K or 4000K)



Continuously Adjustable Beam Angles Indexed at 35°, 45°, 55°



Continuously Adjustable Brightness

Accessories

Optics



LENS-11-AMB
LENS-11-GRN
LENS-11-RED

Amber
Green
Red

LENS-11-BLU
LENS-11-FR

Blue
Frosted

CYLINDER WALL MOUNT

New!



visit product page online

CYLINDER WALL MOUNT

FULLY ADJUSTABLE UP AND DOWNLIGHTS

PATENT
PENDING



IP66





New!

Input	9-15VAC
Power	15W/18VA (7.5W/9.0VA per light)
Brightness	650 lm (325 lm per light)
Color Temp	2700K / 3000K / 4000K
CRI	85
Rated Life	50,000 hours

Transformer Required (order separately)

3611-27/30/40	BK	Black on Aluminum
	BZ	Bronze on Aluminum
	WT	White on Aluminum

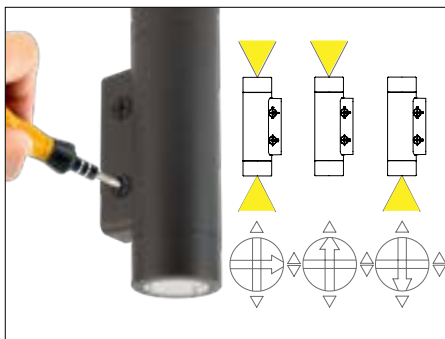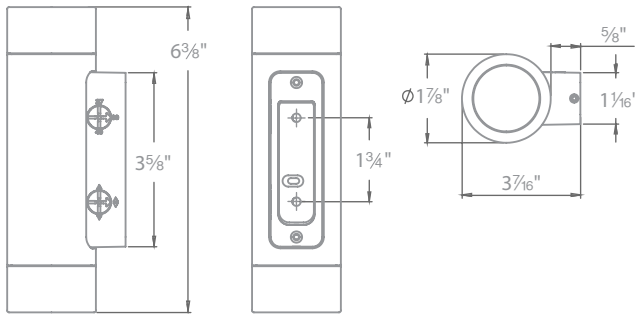

Select Up Light, Down Light or Both



Continuously Adjustable Beam Angles Indexed at 35°, 45°, 55°



Select Warm White, Pure White, or Cool White (2700K, 3000K or 4000K)

Accessories

Optics		LENS-11-AMB	Amber	LENS-11-BLU	Blue
		LENS-11-GRN	Green	LENS-11-FR	Frosted
		LENS-11-RED	Red		

SURFACE MOUNT INDICATOR LED LIGHT

New!



visit product
page online

SURFACE MOUNT INDICATOR LED LIGHT



New!

2" APERTURE

Input 9-15VAC
 Power 2.8W / 3.2VA
 Brightness 3.5 lm - 60 lm
 Color Temp 2700K / 3000K




CRI 90
 Rated Life 60,000 hours

Transformer Required (order separately)
 10' Lead Wire included



2541-27 2700K **BS** *Bronzed Stainless Steel*
2541-30 3000K **SS** *Stainless Steel*




2591-27 2700K **BS** *Bronzed Stainless Steel*
2591-30 3000K **SS** *Stainless Steel*

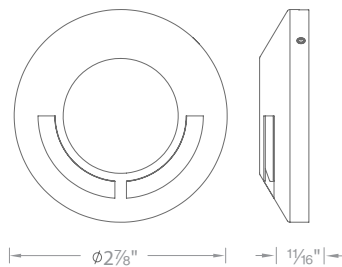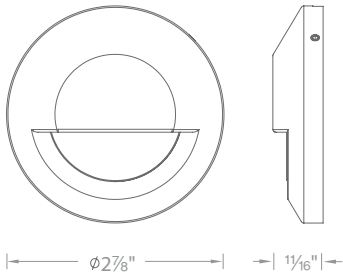

2511-27 2700K **BS** *Bronzed Stainless Steel*
2511-30 3000K **SS** *Stainless Steel*

2571-27 2700K **BS** *Bronzed Stainless Steel*
2571-30 3000K **SS** *Stainless Steel*

2501-27 2700K **BS** *Bronzed Stainless Steel*
2501-30 3000K **SS** *Stainless Steel*

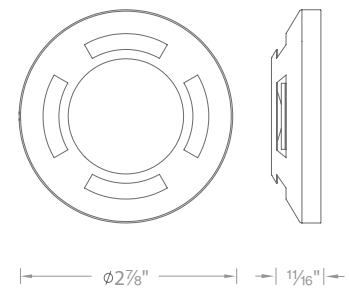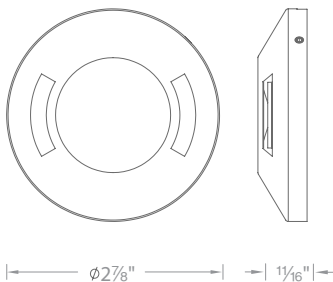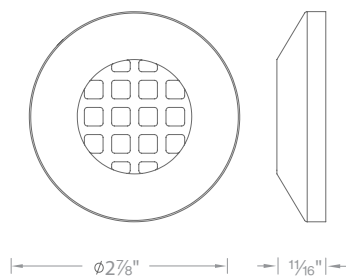

HARDSCAPE LED LANDSCAPE
NEW WITH QUICK RELEASE LIGHT ENGINE, DUAL CCT AND INTEGRAL BRIGHTNESS CONTROL



Select Warm White (2700K)
or Pure White (3000K) light



PATENTED QUICK RELEASE

Based on popular demand, our new patented invention allows for a watertight male/female connection at the fixture for ease of replacement after it is installed

IP66 cULus
1838 listed



Continuously adjustable brightness



Removable stainless steel capstone bracket and rotating mounting clips included

LED HARDSCAPE

WITH ALL THE FEATURES YOU NEED



visit product
page online

HARDSCAPE LED LANDSCAPE

EASILY SERVICEABLE, SWITCH WARM TO PURE WHITE, AND ONBOARD DIMMING



12V

- Quick Release connection at fixture to easily detach from capstone bracket after installation
- Integral Brightness control
- Select Color Temperature in the field
- Corrosion-resistant aluminum alloy
- Factory-sealed watertight fixture
- Transformer required (sold separately)
- Tightly spaced and diffused LEDs for even illumination
- 6' lead wire and direct burial gel-filled wire nuts included

Input: 9-15V
Beam Angle: 110°
CRI: 85
Rated Life: 70,000 hours

See photometric data on page 123




7182-27/30 18 inches




7122-27/30 12 inches




7062-27/30 6 inches

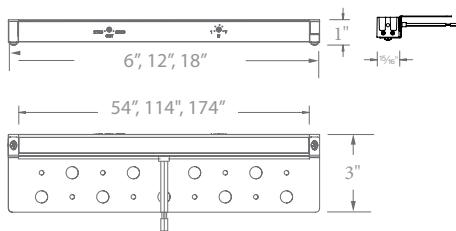


7062, 7122, 7182

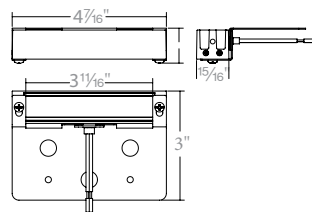

7032*



7032* 3 inches

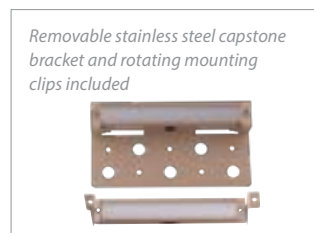

Length	Model	Color Temp	Wattage	Max Lumens	Finishes
3"	7032-27 7032-30	2700K Warm White* 3000K Pure White*	1.5W, 2.6VA	50	BK Black on Aluminum BZ Bronze on Aluminum GH Graphite on Aluminum SD Sand on Aluminum
6"	7062-27/30	2700K Warm White 3000K Pure White	4.5W, 5.6VA	110	BK Black on Aluminum BZ Bronze on Aluminum BBR Bronze on Brass GH Graphite on Aluminum SD Sand on Aluminum
12"	7122-27/30	2700K Warm White 3000K Pure White	7.0W, 7.6VA	230	BK Black on Aluminum BZ Bronze on Aluminum BBR Bronze on Brass GH Graphite on Aluminum SD Sand on Aluminum
18"	7182-27/30	2700K Warm White 3000K Pure White	8.5W, 9.3VA	350	BK Black on Aluminum BZ Bronze on Aluminum GH Graphite on Aluminum SD Sand on Aluminum

Example: **7182-27/30SD**

*Due to its compact size, the 7032 is dedicated in either 2700K or 3000K.

LINEAR PATH LIGHT LED LANDSCAPE



visit product
page online

LINEAR PATH LIGHT LED LANDSCAPE



12V


- Low profile and discreet
- 180° fully rotatable fixture aiming
- Lock desired position in place after adjustment
- Wide Flood Beam 110° x 80°
- Adjustable anti-glare shroud
- Designed for soft ground, wood floor and concrete
- Base mount, riser mount & extension mount
- Path & Accent applications

Transformer Required (order separately)



Input: 9-15VAC
Power: 6.0W/8.6VA
Brightness: 190lm
Beam Angle: 110° x 80°
CRI: 85
Rated Life: 60,000 hours

Model	Color	Finish
6401-27	2700K	BK Black on Aluminum
		BZ Bronze on Aluminum
6401-30	3000K	BK Black on Aluminum
		BZ Bronze on Aluminum

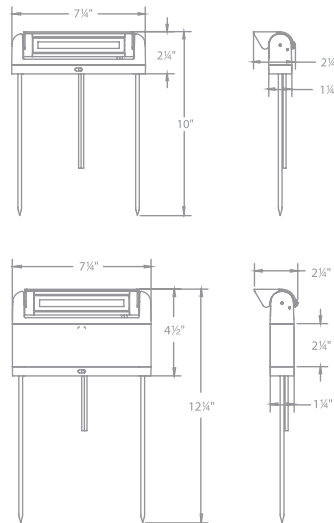

Optional riser attachment included



Extension mount included (Order extension rods separately)

Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
Extension Rods		5000-X04-BZ,BK 5000-X08-BZ,BK 5000-X12-BZ,BK 5000-X18-BZ,BK 5000-X24-BZ,BK	4 in 8 in 12 in 18 in 24 in	Black Bronze Extends distance between Accent light and surface mount canopy, stake, or tree mount box

Detachable shroud, 10' lead wire and direct burial gel filled wire nuts (12V).



visit product
page online

INTERPATH LED AREA LIGHT



- Simple design with small form factor, natural fit to any landscape
- Sturdy center mount design works well in applications where area illumination is desired
- Recommended spacing for installation:
Residential: 4 to 6ft
Commercial: 3 to 4ft


Input	9-15VAC
Power	2.5W / 2.7VA
Brightness	Up to 100 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6511-27	2700K	BK	Black on Aluminum
6511-30	3000K	BZ	Bronze on Aluminum
		BBR	Bronze on Brass





6521-27	2700K	BK	Black on Aluminum
6521-30	3000K	BZ	Bronze on Aluminum

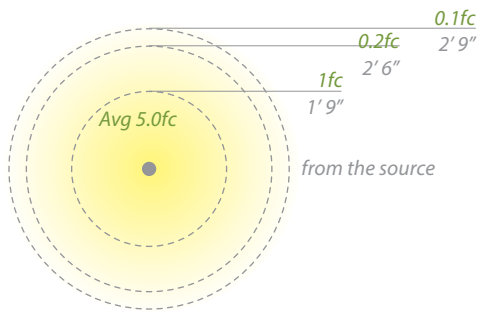EXAMPLE: 6511-30BBR

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included




Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

TIKI LED AREA LIGHT

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Constant output for 9V-15V input



visit product
page online

TIKI LED AREA LIGHT





- Sturdy center mount design works well in applications where area illumination is desired
- Recommended spacing for installation:
Residential: 7 to 9ft
Commercial: 5 to 7ft

Input	9-15VAC
Power	6.5W / 9.5VA
Brightness	Up to 225 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours





22"			
6041-27	2700K	BK	Black on Aluminum
6041-30	3000K	BZ	Bronze on Aluminum
		BBR	Bronze on Brass
15"			
6042-27	2700K	BK	Black on Aluminum
6042-30	3000K	BZ	Bronze on Aluminum

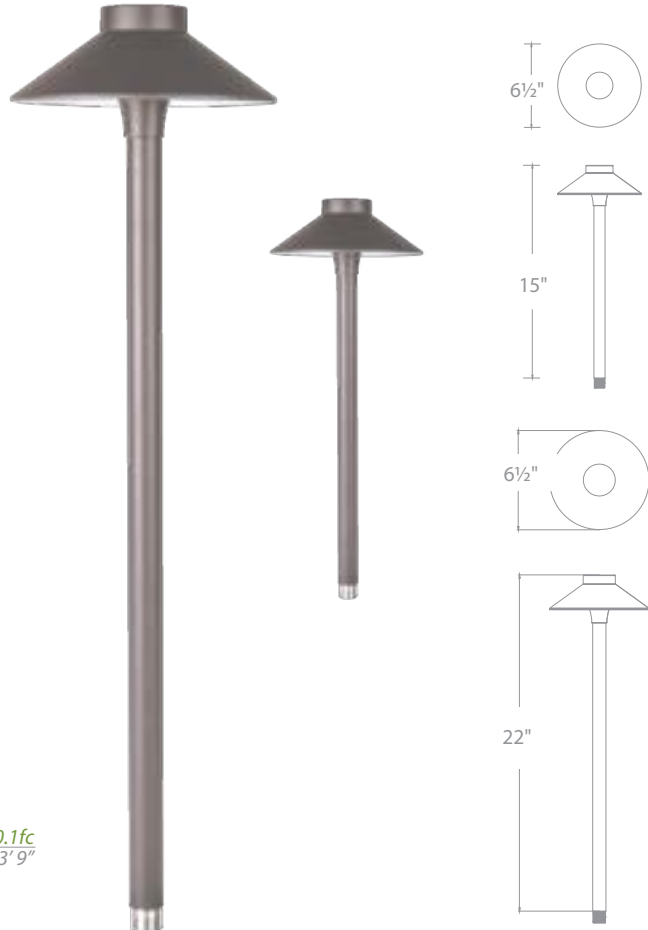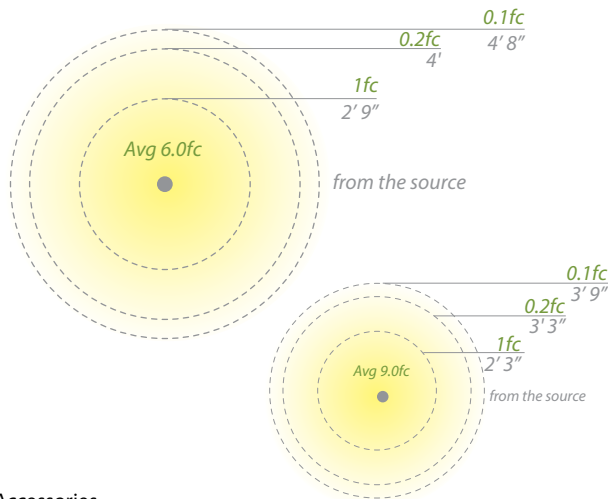Example: 6041-30BBR

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included




Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

CANOPY LED AREA LIGHT

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Constant output for 9V-15V input



visit product
page online

CANOPY LED AREA LIGHT



- Sturdy center mount design works well in applications where area illumination is desired
- Recommended spacing for installation:
Residential: 7 to 9ft
Commercial: 5 to 7ft


Input	9-15V
Power	6.5W/9.5VA
Brightness	Up to 225 lm
Color Temp	2700 & 3000K
CRI	90
Rated Life	60,000 hours

8" Cap
2700 & 3000K Warm and Pure White

- 6051-27** **BK** Black on Aluminum
- 6051-30** **BZ** Bronze on Aluminum
- BBR** Bronze on Brass



6" Cap
2700 & 3000K Warm and Pure White

- 6053-27** **BK** Black on Aluminum
- 6053-30** **BZ** Bronze on Aluminum
- BBR** Bronze on Brass

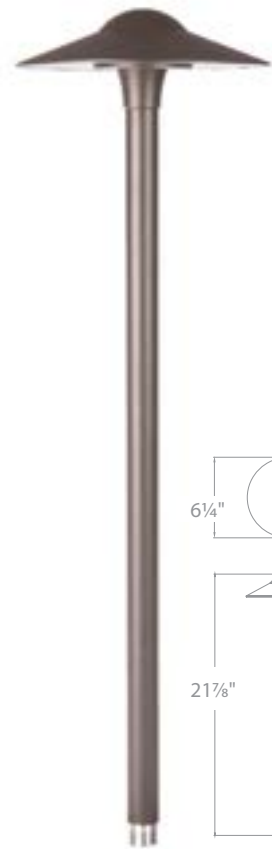



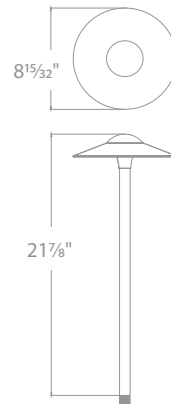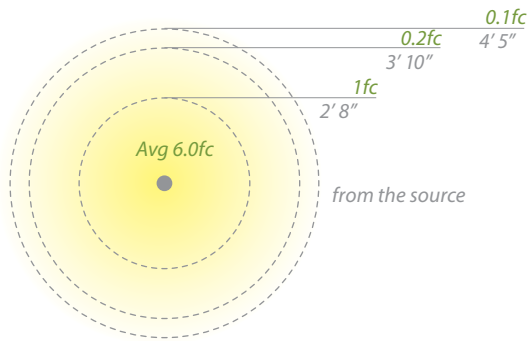

EXAMPLE: 6051-30BZ

Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included



Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7-inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture; formed from a single piece of metal

LEDGE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

LEDGE LED PATH





- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation:
Residential: 8 to 10ft
Commercial: 5 to 7ft
- Transformer Required (order separately)





Input	9-15VAC
Power	3.0W / 4.5VA
Brightness	Up to 105 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

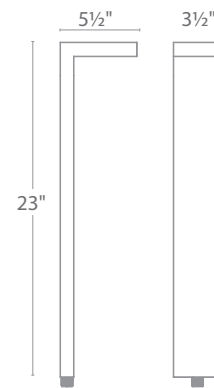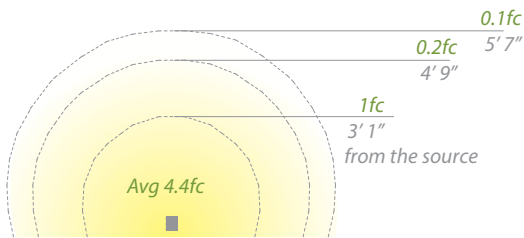6081-27	2700K	BK	Black on Aluminum
6081-30	3000K	BZ	Bronze on Aluminum

Example: 6081-27BZ
14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included




Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

SLIDE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

SLIDE LED PATH





- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation:
Residential: 9 to 11 ft
Commercial: 5 to 7 ft
- Transformer Required (order separately)

Input 9-15VAC
 Power 3.0W / 4.5VA
 Brightness Up to 95 lm
 Color Temp 3000K
 CRI 90
 Rated Life 60,000 hours

3000K Pure White



6311- Small
6321- Large | **BZ** Bronze on Aluminum

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

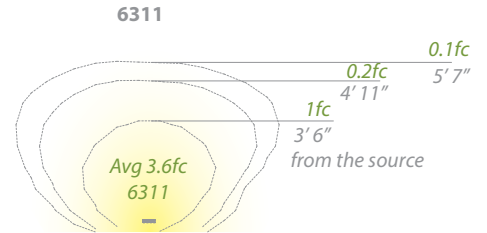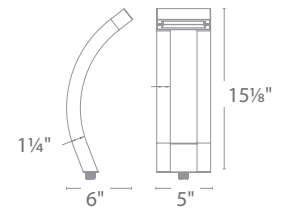



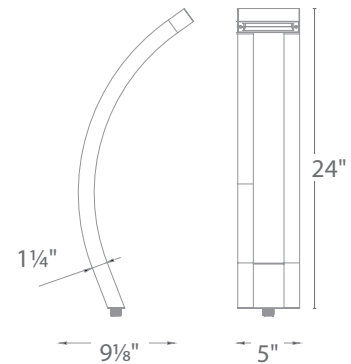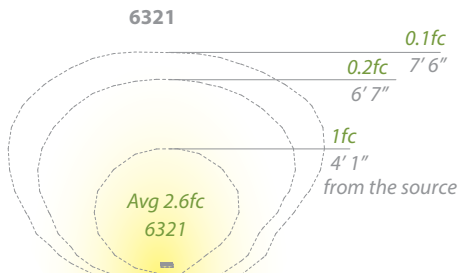

6311 Small
 Residential: 7 to 9ft
 Commercial: 4 to 6ft

6321 Large
 Residential: 9 to 11ft
 Commercial: 5 to 7ft



Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ 5000-SCP-BBR	Black on Aluminum Bronze on Aluminum Bronze on Brass	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

SLOPE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

SLOPE LED PATH





- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
Residential: 7 to 9ft
Commercial: 4 to 6ft
- Transformer Required (order separately)

Input	9-15VAC
Power	2.9W / 4.7VA
Brightness	Up to 95 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6021-27	2700K	BK	Black on Aluminum
6021-30	3000K	BZ	Bronze on Aluminum

Example: 6021-30BK

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

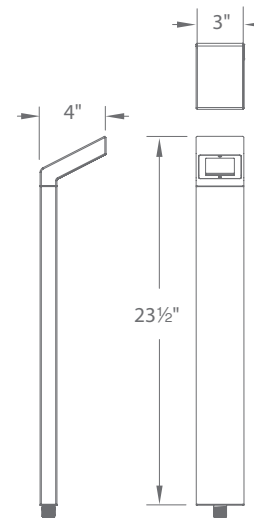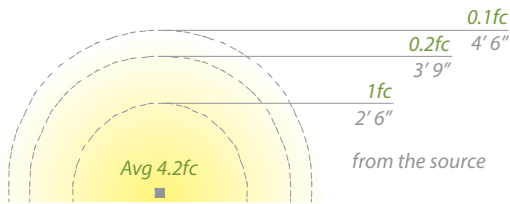

Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ	Black on Aluminum Bronze on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

BALANCE SINGLE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

BALANCE SINGLE LED PATH





- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
Residential: 11 to 13ft
Commercial: 7 to 9ft
- Transformer Required (order separately)

Input	9-15VAC
Power	6.5W / 11.5VA
Brightness	Up to 275 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6061-27	2700K	BK	Black on Aluminum
6061-30	2700K	BZ	Bronze on Aluminum

Example: 6061-30BZ

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

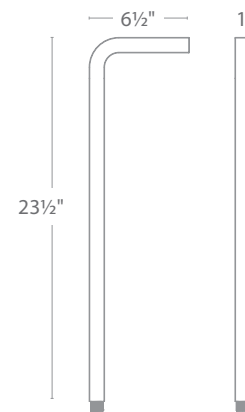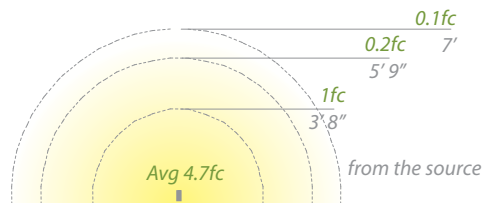

Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ	Black on Aluminum Bronze on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

BALANCE DOUBLE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

BALANCE DOUBLE LED PATH



- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
Residential: 11 to 13ft
Commercial: 7 to 9ft
- Transformer Required (order separately)



Input	9-15VAC
Power	10W / 14VA
Brightness	Up to 375 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6071-27	2700K	BK	Black on Aluminum
6071-30	3000K	BZ	Bronze on Aluminum





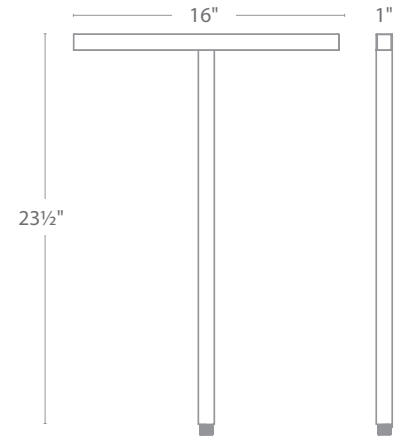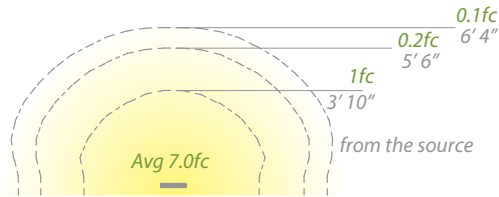

Example: 6071-30BZ

9" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included



Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ	Black on Aluminum Bronze on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

QUAD LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input



visit product
page online

QUAD LED PATH





- Sleek linear design blends seamlessly into pathways while providing soft, even illumination
- Recommended spacing for installation :
Residential: 8 to 10ft
Commercial: 5 to 7ft
- Transformer Required (order separately)

Input	9-15VAC
Power	3W / 4.5VA
Brightness	Up to 100 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6091-27 2700K
6091-30 3000K | **BZ** Bronze on Aluminum

Example: 6091-30BZ

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included

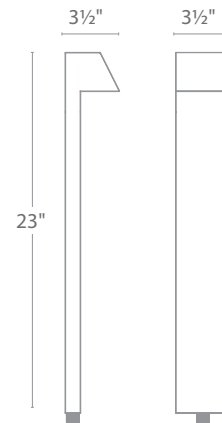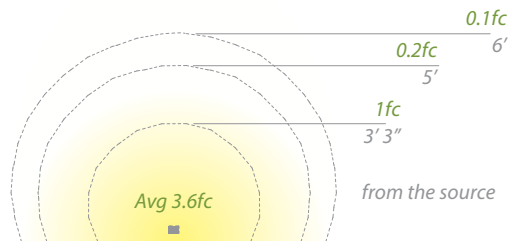


Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ	Black on Aluminum Bronze on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

ECLIPSE LED PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Solid die-cast corrosion resistant aluminum alloy
- Constant output for 9V-15V input



visit product
page online

ECLIPSE LED PATH





- Sturdy side mount design works well in applications where directional illumination is desired
- Recommended spacing for installation :
Residential: 8 to 10ft
Commercial: 5 to 7ft
- Transformer Required (order separately)

Input	9-15VAC
Power	2.9W / 4.7VA
Brightness	Up to 125 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours





6031-27	2700K	BK	Black on Aluminum
6031-30	3000K	BZ	Bronze on Aluminum

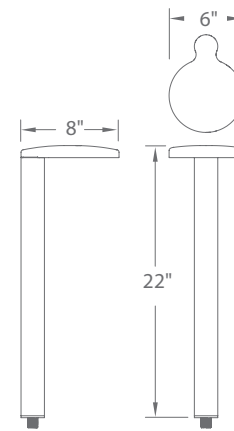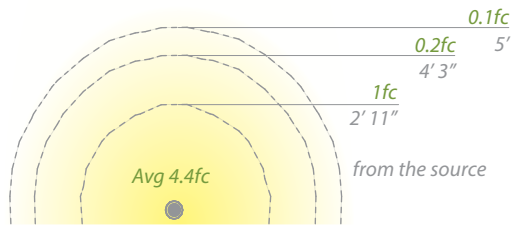Example: 6031-30BZ

14" Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included



Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ	Black on Aluminum Bronze on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

AREA LED AREA LIGHT

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Constant output for 9V-15V input



visit product
page online


AREA LED AREA LIGHT



- Broad appeal makes this fixture suitable for varying landscape designs
- Recommended spacing for installation :
Residential: 11 to 13ft
Commercial: 7 to 9ft
- Transformer Required (order separately)


Input	9-15VAC
Power	5.8W / 9.4VA
Brightness	Up to 150 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6011-27	2700K	BK	Black on Aluminum
6011-30	3000K	BZ	Bronze on Aluminum
		BBR	Bronze on Brass

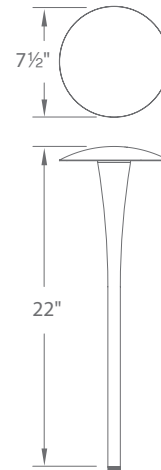



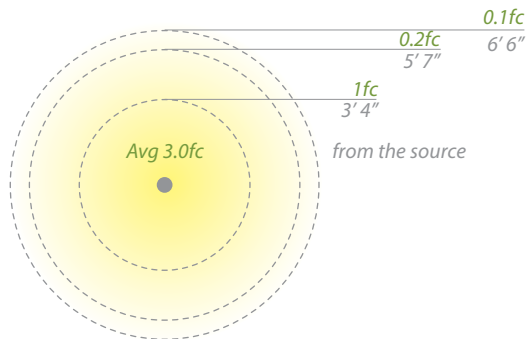

Example: 6011-30BZ

Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts included




Accessories

9" Mounting Stake		9000-ST9-BZ	Bronze	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Bronze	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BK 5000-SCP-BZ	Black on Aluminum Bronze on Aluminum	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Stainless Steel	Heavy duty stainless steel spike to position fixture

GATE LED BOLLARD/PATH

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input
- Mounting accessories included



visit product
page online

GATE LED BOLLARD/PATH





- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input
- Mounting accessories included
- Detachable back plate for lighting control included
- Transformer Required (order separately)

Input	9-15VAC
Power	7.2W, 7.6VA
Brightness	Up to 115 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6651-27	2700K	BK	Black on Aluminum
6651-30	3000K	BZ	Bronze on Aluminum

Example: 6651-30BK

Power stake, 6 foot lead wire, and direct burial gel filled wire nuts included

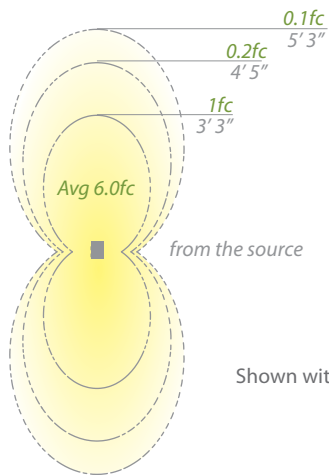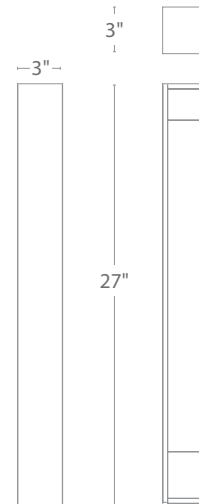

Shown without plate



Shown with plate



Mounting accessory included
12V



M6000-STAKE

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination



Single direction illumination with back plate

SCOOP 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input
- Mounting accessories included



visit product
page online

SCOOP 12V/120V/277V LED BOLLARD



12V

Input	9-15VAC
Power	7.8W/8.5VA
Brightness	Up to 180 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6611-27	2700K	BK	Black on Aluminum
6611-30	3000K	BZ	Bronze on Aluminum

Transformer Required (order separately)


MLV dimming only

Example: 6611-30BK

Recommended spacing for installation :

(12V) 6611


- Residential: 5 to 6ft
- Commercial: 3 to 4ft

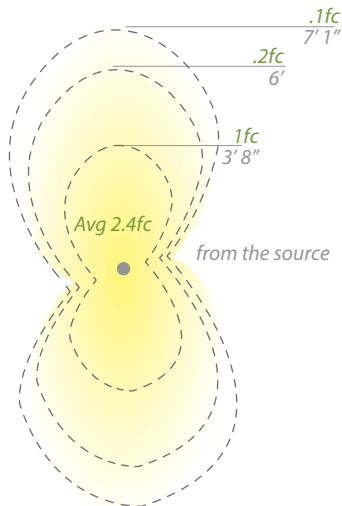

Recommended spacing for installation:

(120V, 277V) 6612, 6613

- Residential: 6.5 to 7.5ft
- Commercial: 4.5 to 5.5ft

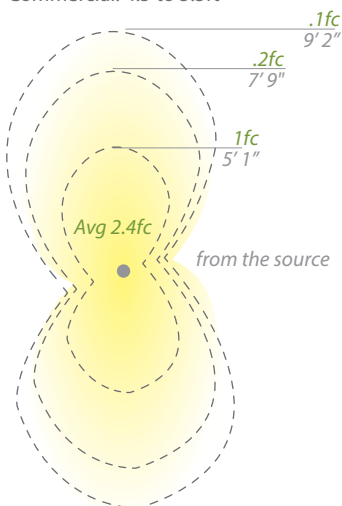

120V

Input	120V
Power	12.5W
Brightness	Up to 350 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6612-27	2700K	BK	Black on Aluminum
6612-30	3000K	BZ	Bronze on Aluminum

TRIAC or ELV dimming


277V

Input	277V
Power	13.2W
Brightness	Up to 370 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	60,000 hours

6613-27	2700K	BK	Black on Aluminum
6613-30	3000K	BZ	Bronze on Aluminum

ELV dimming only

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

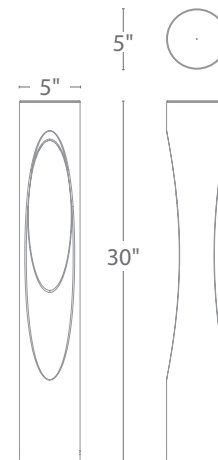

Mounting accessory included

12V

120V/277V



M6000-STAKE


M6610-CON-KIT



Even illumination front and back

CHAMBER 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input
- Mounting accessories included



visit product
page online

CHAMBER 12V/120V/277V LED BOLLARD



12V

Input	9-15VAC
Power	5.8W, 6.2VA
Brightness	Up to 150 lm
Color Temp	2700K Warm white 3000K Pure white
CRI	90
Rated Life	60,000 hours

120V

Input	120V
Power	12.5W
Brightness	Up to 400 lm
Color Temp	2700K Warm white 3000K Pure white
CRI	90
Rated Life	60,000 hours

277V

Input	277V
Power	13.2W
Brightness	Up to 450 lm
Color Temp	2700K Warm white 3000K Pure white
CRI	90
Rated Life	60,000 hours

6631-27	2700K	BK	Black on Aluminum	6632-27	2700K	BK	Black on Aluminum	6633-27	2700K	BK	Black on Aluminum
6631-30	3000K	BZ	Bronze on Aluminum	6632-30	3000K	BZ	Bronze on Aluminum	6633-30	3000K	BZ	Bronze on Aluminum

Transformer Required (order separately)

MLV dimming only


Example: 6633-30BK

TRIAC or ELV dimming

ELV dimming only


Recommended spacing for installation :
(12V) 6631

- Residential: 19.5 to 23ft
- Commercial: 13 to 15.5ft

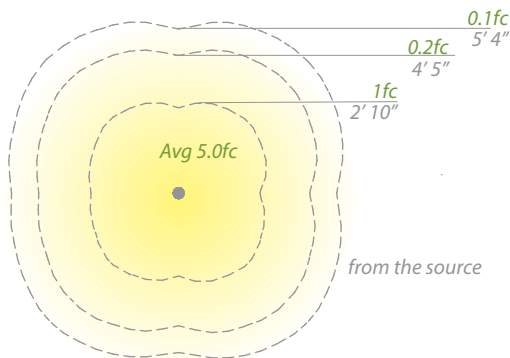


Recommended spacing for installation :
(120V, 277V) 6632, 6633

- Residential: 12.5 to 15ft
- Commercial: 8 to 10ft

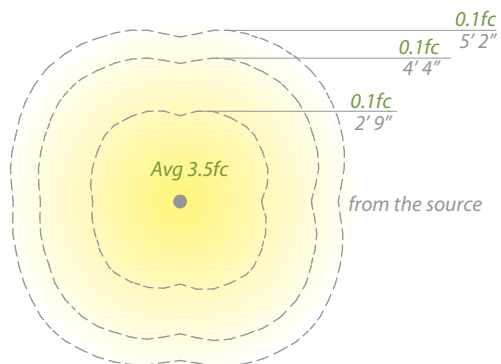

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

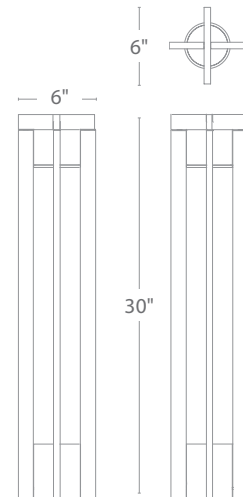

Mounting accessory included

12V

120V/277V



M6000-STAKE

M6630-CON-KIT




CHAMBER 120V 16" & 20" LED OUTDOOR WALL SCONCE


Color Temp: 3000K
 CRI: 90
 Dimming: 100%–10% ELV
 Rated Life: 50,000 hours*
 Input: 120V (277V special order)

- Solid aluminum construction with weather-resistant finish
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- No transformer or driver required

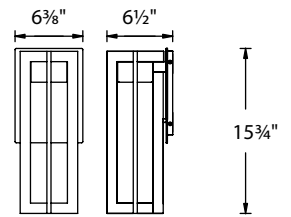

Bold Mid-Century Modern look with intersecting aluminum frames and cutting-edge LED light.

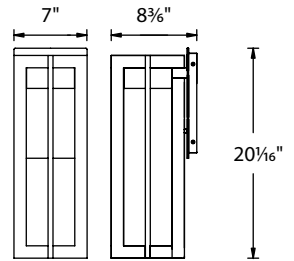

WS-W48616



WS-W48620

	Size	Watt	LED Lumens	Delivered Lumens	Finish
	WS-W48616 16"	12W	1000	255	BK Black BZ Bronze
	WS-W48620 20"	18W	1600	519	

Example: **WS-W48616-BK**



For 277V, add an "F" before the finish: **WS-W48616F-BK**



visit product page online

CHAMBER 120V
16" LED OUTDOOR PENDANT

CHAMBER 120V
20" LED OUTDOOR POST MOUNT

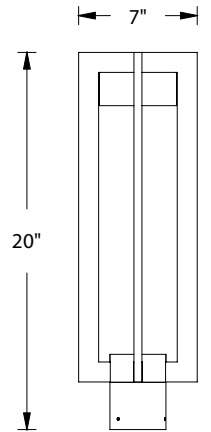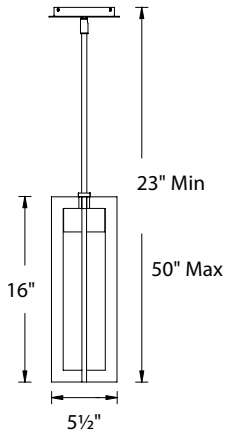

	Size	Watt	LED		Delivered Lumens	Finish
			Lumens	Lumens		
PD-W48616	16"	12W	1000	372		BK Black BZ Bronze

Example: **PD-W48616-BK**

	Size	Watt	LED		Delivered Lumens	Finish
			Lumens	Lumens		
PM-W48620	20"	17.5W	1600	634		BK Black BZ Bronze

Example: **PM-W48620-BZ**



visit product page online

TOWER 12V/120V/277V (CHECK VOLTAGE) LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input
- Mounting accessories included



visit product
page online

TOWER 12V/120V LED BOLLARD



12V

Input Power	9-15VAC
Brightness	5.8W, 6.2VA
Color Temp	Up to 170 lm
	2700K Warm white
	3000K Pure white
CRI	90
Rated Life	60,000 hours

120V

Input Power	120V
Brightness	12.5W
Color Temp	Up to 430 lm
	2700K Warm white
	3000K Pure white
CRI	90
Rated Life	60,000 hours

277V

Input Power	277V
Brightness	13.2W
Color Temp	Up to 470 lm
	2700K Warm white
	3000K Pure white
CRI	90
Rated Life	60,000 hours

6621-27 2700K **BK** Black on Aluminum
6621-30 3000K **BZ** Bronze on Aluminum

6622-27 2700K **BK** Black on Aluminum
6622-30 2700K **BZ** Bronze on Aluminum

6623-27 2700K **BK** Black on Aluminum
6623-30 3000K **BZ** Bronze on Aluminum

Transformer Required (order separately)

MLV dimming only

TRIAC or ELV dimming


ELV dimming only

Example: 6622-30BK

Recommended spacing for installation :

(12V) 6621


- Residential: 12 to 14.5ft
- Commercial: 4 to 6.5ft

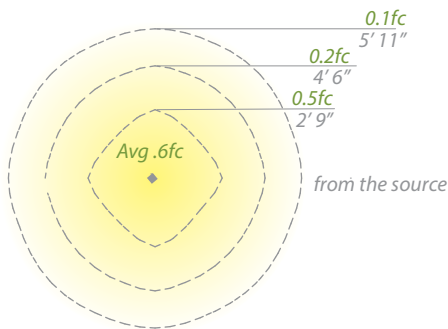


Recommended spacing for installation :

(120V, 277V) 6622, 6623

- Residential: 16 to 22ft
- Commercial: 8 to 11ft

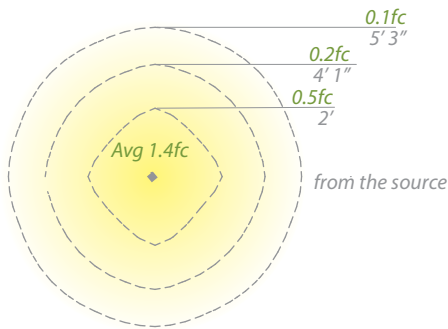

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

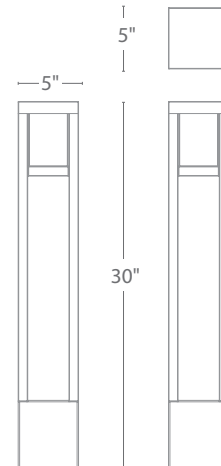

Mounting accessory included

12V

120V/277V




M6000-STAKE

M6620-CON-KIT

ARCHETYPE 12V/120V/277V LED BOLLARD

- IP66 Rated, protected against high-pressure water jets
- Factory sealed, watertight fixtures
- Constant output for 9V-15V input
- Mounting accessories included



visit product
page online

ARCHETYPE 12V/120V/277V LED BOLLARD



12V

Input	9-15VAC
Power	5.8W, 6.2VA
Brightness	Up to 195 lm
Color Temp	2700K Warm white 3000K Pure white
CRI	90
Rated Life	60,000 hours

120V

Input	120V
Power	12.5W
Brightness	Up to 470 lm
Color Temp	2700K Warm white 3000K Pure white
CRI	90
Rated Life	60,000 hours

277V

Input	277V
Power	13.2W
Brightness	Up to 550 lm
Color Temp	2700K Warm white 3000K Pure white
CRI	90
Rated Life	60,000 hours

6641-27 2700K **BK** Black on Aluminum
6641-30 3000K **BZ** Bronze on Aluminum

6642-27 2700K **BK** Black on Aluminum
6642-30 3000K **BZ** Bronze on Aluminum

6643-27 2700K **BK** Black on Aluminum
6643-30 3000K **BZ** Bronze on Aluminum

Transformer Required (order separately)

MLV dimming only

TRIAC or ELV dimming


ELV dimming only

Example: 6641-30BK

Recommended spacing for installation :

(12V) 6641


- Residential: 11.5 to 14ft
- Commercial: 7 to 9ft

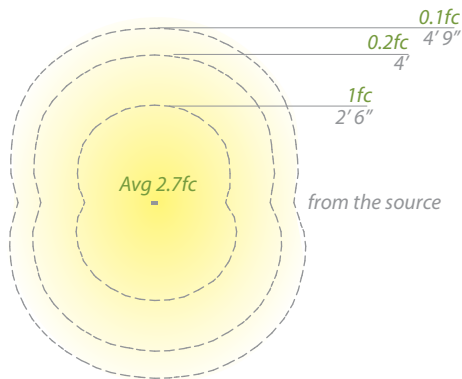


Recommended spacing for installation :

(120V, 277V) 6642, 6643

- Residential: 12.5 to 14.5ft
- Commercial: 8 to 9.5ft

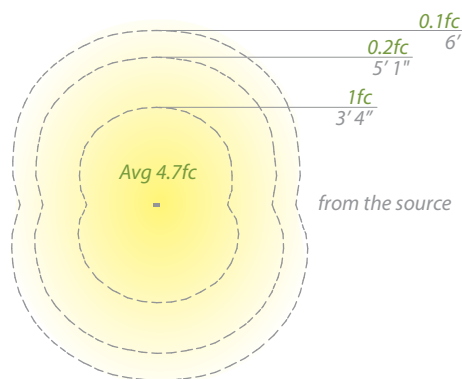

- Sleek linear design blends seamlessly into pathways while providing soft, even illumination

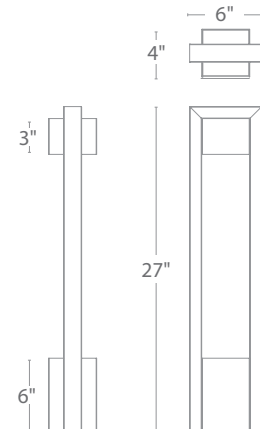

Mounting accessory included

12V

120V/277V



M6000-STAKE


M6640-CON-KIT



ARCHETYPE 120V/277V 18" LED OUTDOOR SCNCE

Color Temp: 3000K
CRI: 90
Dimming: 100% - 10% ELV
Rated Life: 54,000 hours
Input: 120V

WS-W13918

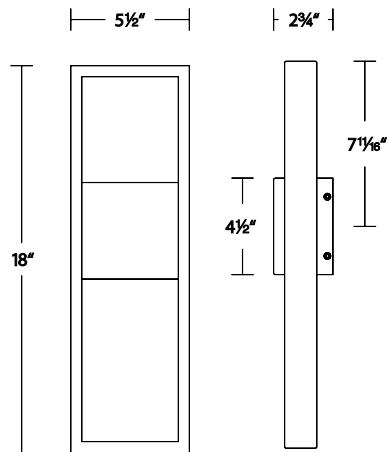

A low-profile, artful design adds a distinctive, sophisticated look in any outdoor application.

- Aluminum hardware with etched glass diffuser
- No transformer or driver required

	Size	Watt	LED Lumens	Delivered Lumens	Finish
WS-W13918	18"	16W	1200	427	BK Black
WS-W13924	24"	22W	1600	760	BK Black

Example: **WS-W13918-BK**


	Size	Watt	LED Lumens	Delivered Lumens	Finish
WS-W15912	12"	10W	800	331	BK Black
WS-W15918	18"	13W	1000	435	BK Black
WS-W15924	24"	16W	1200	571	BK Black

Example: **WS-W15912-BK**


ARCHETYPE 120V/277V 12", 18" & 24" LED OUTDOOR SCNCE

Color Temp: 3000K
CRI: 90
Dimming: 100% - 10% ELV
Rated Life: 54,000 hours
Input: 120V


WS-W15912




WS-W15918

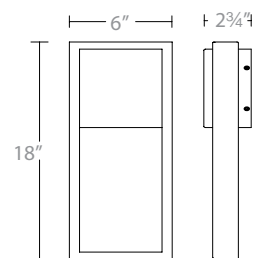

WS-W15924

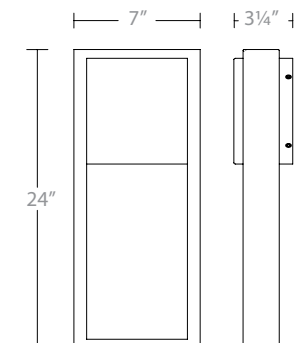

18" LED OUTDOOR PENDANT

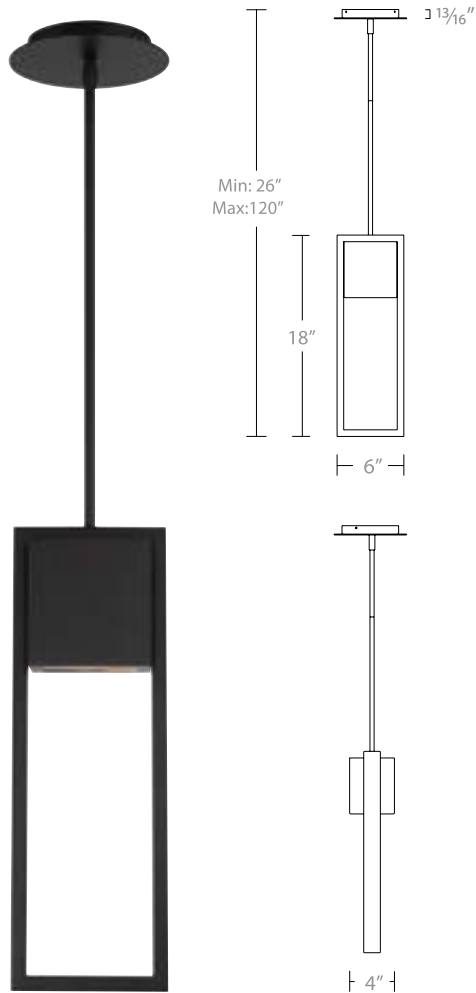

- Aluminum hardware with etched glass diffuser
- No transformer or driver needed
- Three 12" and one 6" downrod included (additional rods available)

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 54,000 hours
 Input: 120V

A low-profile, artful design adds a distinctive, sophisticated look in any outdoor application.


	Size	Watt	LED Lumens	Delivered Lumens	Finish
PD-W15918	18"	10W	800	379	BK Black

Example: **PD-W15918-BK**

	Size	Watt	LED Lumens	Delivered Lumens	Finish
PM-W15928	28"	16W	1200	382	BK Black

Example: **PM-W15928-BK**

ARCHETYPE 28" LED OUTDOOR PENDANT

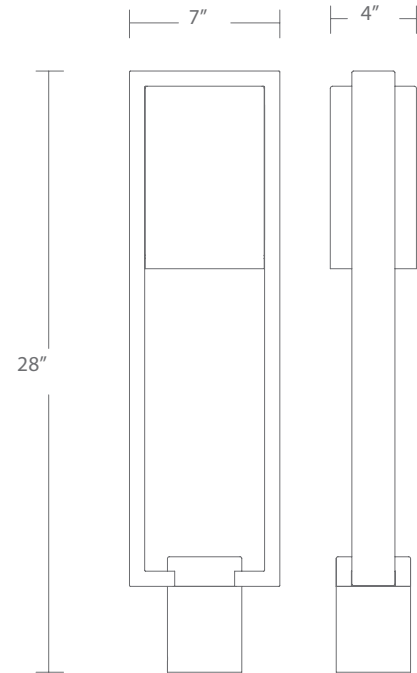

- Aluminum hardware with etched glass diffuser
- No transformer or driver needed
- Mount on 3" maximum post (not included)

Color Temp: 3000K
 CRI: 90
 Dimming: 100% - 10% ELV
 Rated Life: 54,000 hours
 Input: 120V

SCONCE




PENDANT



visit product page online

12V OUTDOOR SUBMERSIBLE LANDSCAPE TAPE LIGHTING



visit product
page online

- Submersible up to 5 feet
- May be tied into any 12V landscape lighting system
- Maximum of 40 ft per run to stay within 5 amps
- Flexible linear lights may be cut to desired length at the end of the run
- Various lengths may be joined together with IP68 Rated connectors
- UV-stabilized silicone seals and protects the tape sections

12V OUTDOOR SUBMERSIBLE LANDSCAPE TAPE LIGHTING



- Integrates with other landscape lighting products using the same transformer

Transformer Required (order separately)

Input	12VAC
Power	2W/ 2.1VA <i>per foot</i>
Brightness	Up to 115 lm <i>per foot</i>
CRI	85
Rated Life	60,000 hours



Model	Color Temp	Brightness
8011 1 foot	27BK 2700K Warm White	110 lm per foot
8051 5 feet		
8101 10 feet		
	30BK 3000K Pure White	115 lm per foot

Example: **8051-30BK**

Distinct mechanical and electrical connections minimize spacing between LEDs when joining sections, and allow for seemingly endless tape runs that can be powered separately




IP68 Rated for submersion up to 5ft

Accessories

	Clear Channel	LED-TO24-CH5	5 feet Includes mounting hardware		Lead Wire with 5A fuse	8000-06BK 6 feet 8000-10BK 10 feet	40 ft max tape run; protects tape sections from over current
	Surface Mounting Clip	LED-TO24-C1	Secures on both edges (10 Qty)		Joiner Cable - Short	8001-6BK 6 inch 8001-12BK 1 foot	
	Edge Mounting Clip	LED-TO24-C2	Secures on one edge (10 Qty)		Joiner Cable - Long	8001-72BK 6 feet 8001-120BK 10 feet	
	Invisible Clip	LED-TO24-C3	Spring clip secures beneath tape (10 Qty)		4 Way "X" Connector	8003-BK	
	End Cap	LED-TO24-EC			3 Way "Y" Connector	8002-BK	

Model

9075-TRN-SS	75W Max Dimensions: 13.97" L x 5.35"W x 5.63"H
9150-TRN-SS	150W Max Dimensions: 18.90" L x 6.69"W x 6.30"H
9300-TRN-SS	300W Max Dimensions: 18.90" L x 6.69"W x 6.30"H
9600-TRN-SS	600W Max (2 x 300W outputs) Dimensions: 14.49" L x 10.08"W x 5.94"H

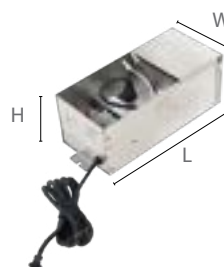

- IP65 Rated
- 12V to 15V taps
- Knockouts for power and photo sensor connections
- 3-prong outlet for timer
- Outdoor Rated stainless steel transformer contains an outdoor Rated 3-prong plug for power

24VDC OUTDOOR NON-SUBMERSIBLE TAPE LIGHTING



visit product
page online

24VDC OUTDOOR NON-SUBMERSIBLE TAPE LIGHTING



Input	24VDC
Power	1.2W/ 2.4W <i>per foot</i>
Brightness	Up to 200 lm <i>per foot</i>
CRI	90
Rated Life	50,000 hours



TAPE SELECTIONS

System	Lumens	Power	Max Run	Length	Color Temp	Color	
T24-OD1	100 lm/ft	1.2W/ft	80ft	01	1 foot	27 2700K	BK Black
				05	5 feet		
				10	10 feet		
				20	20 feet		
				40	40 feet		
				80*	80 feet*		
T24-OD2	200 lm/ft	2.4W/ft	40ft		30 3000K		
					40 4000K		

- May be cut every 4 inches
- Beam Spread: 115°
- Multiple roll lengths offered
- Equal brightness from end to end
- Protection against water spray, dust with silicone jacket (IP65)
- 100 ft max distance between the power supply and beginning of InvisiLED®

*T24-OD2 not available in 80 feet

EXAMPLE: T24-OD2-01-27



Accessories

<p>InvisiLED Outdoor Joiner Cable. Extends power supply lead wire</p>	<p>T24-WE-IC-002-BK 2 in T24-WE-IC-006-BK 6 in T24-WE-IC-012-BK 1 ft T24-WE-IC-036-BK 3 ft Black T24-WE-IC-072-BK 6 ft T24-WE-IC-144-BK 12 ft T24-WE-IC-240-BK 20ft</p>	<p>InvisiLED Outdoor Surface Mounting Clip. 24VDC Wet Rated Mounting Screws</p>	<p>LED-TO24-C1 Black (10 pieces)</p>
<p>InvisiLED Outdoor Lead Wire. Connects to Indoor Power Supply</p>	<p>T24-WE-BO12-BK 1 ft Black T24-WE-BO72-BK 6 ft</p>	<p>InvisiLED Outdoor Edge Mounting Clip. 24VDC Wet Rated Tape Mounting Screws</p>	<p>LED-TO24-C2 Black (10 pieces)</p>
<p>InvisiLED Outdoor Power Connector Kit with Wire Jacket and Silicone Sealant. Allows power to Wet Rated tape</p>	<p>T24-WE-EX2-006-BK 6 in Black</p>	<p>InvisiLED Outdoor Underside Mounting Clip. 24VDC Wet Rated Tape Mounting Screws</p>	<p>T24-WE-C3 Black (10 pieces)</p>
<p>InvisiLED Outdoor Tape to Tape Y Connector. Splits power to the two tape sections</p>	<p>T24-WE-Y-BK Black</p>	<p>InvisiLED Outdoor Surface Mount Clear Channel</p>	<p>T24-WE-CH5 5 ft Clear</p>
<p>Wet Rated Tape End Cap with Silicone Sealant. 24VDC Wet Rated (10 pieces)</p>	<p>T24-WE-EC Clear (10 pieces)</p>	<p>Silicone Sealant. Wet Location Tape Sealant (45 grams)</p>	<p>T24-WE-SI-45 White</p>

Type	Model	Input	Output	Dimmable
Remote Wet Location	PS-24DC-U96R-WE	120V-277VAC	24V DC 96W	ELV / TRIAC Includes a 6 foot lead wire
Portable Wet Location	PS-24DC-A96P-WE	120V	24V DC 96W	N/A Includes a 6 foot lead wire 120V input power cord ready

24V SUBMERSIBLE OUTDOOR TAPE LIGHTING



visit product
page online


24V SUBMERSIBLE OUTDOOR TAPE LIGHTING



- IP-68 Rated, UL/cUL listed for wet locations
- May be field cut every 6 inches at the end of a run
- Maximum run length of 28ft per electrical feed

Power	3.5W /ft
Brightness	Up to 220 lm /ft
CRI	90
Rated Life	50,000 hours

Double insulated PVC encasement and distinct electrical and mechanical junctions allow for seemingly endless runs that can be powered separately

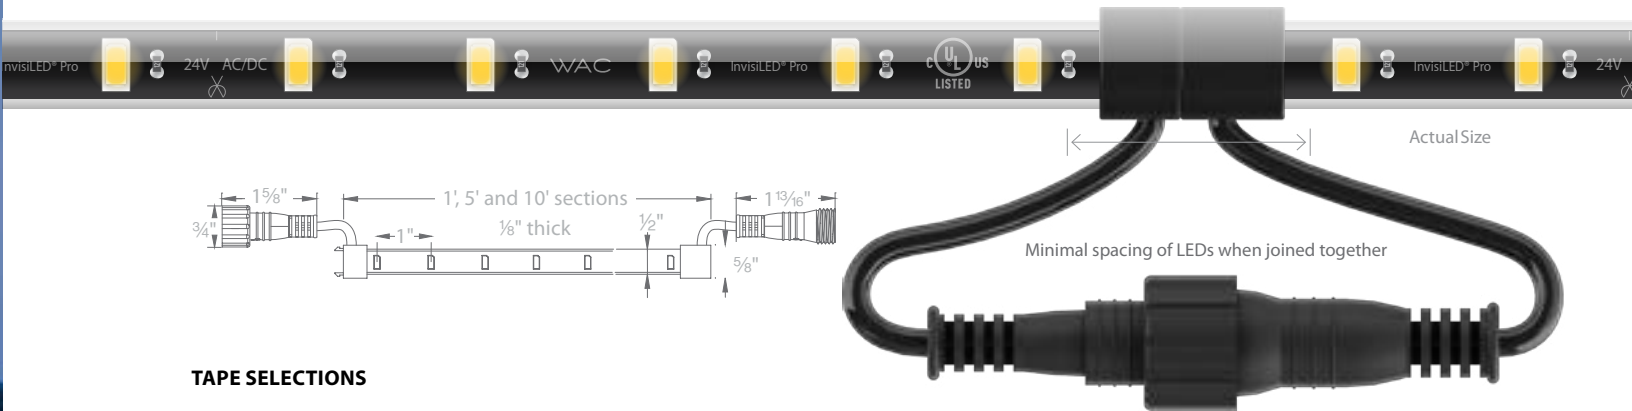



TAPE SELECTIONS

System	Color Temp	Length	Color
LED-TO2427	2700K	1 1 foot	WT White
LED-TO2430	3000K	5 5 feet	
LED-TO2435	3500K	10 10 feet	

EXAMPLE: LED-TO2435-10-WT

CLASS 2 POWER SUPPLY FOR SUBMERSIBLE OUTDOOR TAPE LIGHT (REQUIRED)

Type	Model	Power	Input	Output	Dimmable
Remote Damp Location	 EN-OD24100-RB2-T	96W	120V AC	24V AC	ELV Includes a 6 foot lead wire
Remote Wet Location	 EN-O24100-RB2-T	96W	120V - 277V AC	24V DC	0-10V Includes a 6 foot lead wire

	 Surface mounting clip Secures on both edges	LED-TO24-C1	10 pcs 20 Screws
	 Edge mounting clip Secures on one edge	LED-TO24-C2	10 pcs 10 Screws
	 Invisible clip Holds from the underside	LED-TO24-C3	10 pcs 10 Screws


Includes a diffuser, two end caps, and five screws
Snap in to hold Pro Outdoor, Palette Outdoor or Landscape.

Clips that hold InvisiLED, Pro Outdoor, Palette Outdoor, or Landscape Tape Light

	3-Way "Y" Connector <i>Connects tape sections</i>	LED-TO24-Y	 Joiner Cable <i>Extends distance between transformers and controllers</i>	LED-TO24-IC6 6 in LED-TO24-IC12 12 in LED-TO24-IC72 72 in LED-TO24-IC120 120 in
	4-Way "X" Connector <i>Connects tape sections</i>	LED-TO24-X	 End cap <i>1 cut and 1 male end cap</i>	LED-TO24-EC Black

Compatible with Pro Outdoor, Landscape Tape Light

24VDC SUBMERSIBLE OUTDOOR RGB TAPE LIGHTING



Featured Product: **LED-TCO-5-RGB** with **LED-TO24-CH5**

**Not rated for use inside a swimming pool*


visit product
page online

24VDC SUBMERSIBLE OUTDOOR RGB TAPE LIGHTING



1838 listed

- IP-68 Rated, UL/cUL listed for wet locations
- Variable colors with 3500K White
- DMX and wireless controller options for Palette outdoor system
- Maximum run length of 40 feet
- May be field cut every 6 inches at the end of a run
- Dim with wired controller and wireless controller accessory

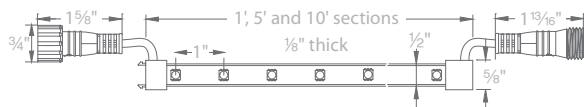

Power Brightness 1.5W /ft
40 lm /ft
on 3500K Setting


Rated Life 50,000 hours

TAPE SELECTION




System	Length	Type
LED-TCO	1 1' Foot	RGB Color Changing
	5 5' Feet	
	10 10' Feet	



Example: **LED-TCO-5-RGB**

CLASS 2 POWER SUPPLY FOR PALETTE OUTDOOR (REQUIRED)


Type	Model	Power	Input	Output
Remote Wet Location 	EN-O24100-RB2-T	96W	120V - 277V AC	24V DC <i>Includes a 6 foot lead wire</i>

ACCESSORIES FOR PALETTE OUTDOOR

 Signal Wire <i>Master to Slave controller or Slave to Slave</i>	LED-TO24-SW60 LED-TO24-SW120	60 in 120 in
 DMX Signal Wire <i>DMX to Master controller</i>	LED-TO24-MW60 LED-TO24-MW120	60 in 120 in
 RGB Joiner Cable <i>Extends distance between tape and to controllers</i>	LED-TO24-IC6-RGB LED-TO24-IC12-RGB LED-TO24-IC72-RGB LED-TO24-IC120-RGB	6 in 12 in 72 in 120 in

 3-Way "Y" Connector <i>Connects tape sections</i>	LED-TO24-Y-RGB
 4 Way "X" Connector <i>Connects tape sections</i>	LED-TO24-X-RGB

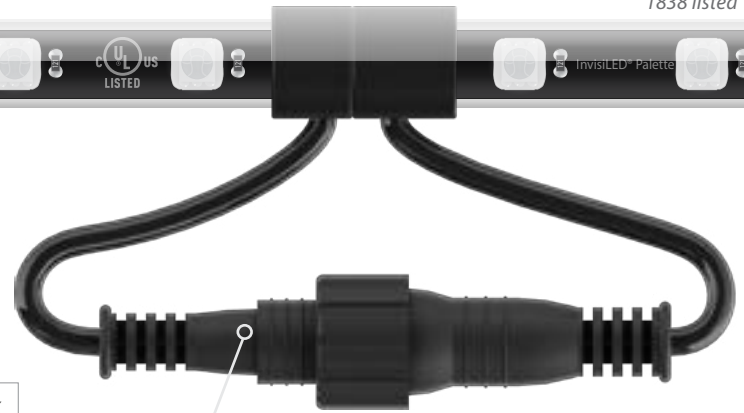


Compatible with Palette Outdoor





Double insulated PVC encasement and distinct electrical and mechanical junctions allow for seemingly endless runs that can be powered separately

CONTROLLER FOR PALETTE OUTDOOR (REQUIRED)

Master Controller (required) 	LED-TO24-CM	4 function wired controller
Wireless Controller (required) 	LED-TO24-WS	4 function wireless controller
Slave Controller (optional) 	LED-TO24-CS	Connects to Master Controller, adding 40 ft run Compatible with Palette Outdoor

 Surface Mounting Clip Secures on both edges	LED-TO24-C1	10 pcs 20 Screws
 Edge Mounting Clip Secures on one edge	LED-TO24-C2	10 pcs 10 Screws
 Invisible Clip Holds from the underside	LED-TO24-C3	10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes, Pro Outdoor, Palette Outdoor, Landscape Tape Light

 Clear Channel	LED-TO24-CH5	5 feet
 End Cap <i>1 cut and 1 male end cap</i>	LED-TO24-EC	Black

Includes a diffuser, two end caps, and five screws. (Pro Outdoor, Palette Outdoor, Landscape Tape Light snap in to hold outdoor InvisiLED tapes).

DECK & PATIO LED LANDSCAPE

- IP66 Rated, protected against powerful water jets
- Translucent lens provides for uniform diffused light output
- 100%-10% dimming - see specifications for list of tested dimmers
- Solid die-cast brass or corrosion resistant aluminum alloy
- ADA Compliant



visit product
page online

DECK & PATIO LED LANDSCAPE




3011

Input	9-15VAC
Power	2.8W / 4.6VA
Brightness	60 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	50,000 hours

3011-27	2700K	BK	Black on Aluminum
3011-30	3000K	BBR	Bronze on Brass
		BZ	Bronze on Aluminum
		WT	White on Aluminum

Transformer Required (order separately)

Example: 3011-27BZ

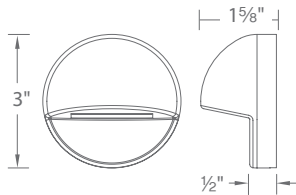


3021

Input	9-15VAC
Power	2.8W / 4.6VA
Brightness	60 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	50,000 hours


3021-27	2700K	BK	Black on Aluminum
3021-30	3000K	BBR	Bronze on Brass
		BZ	Bronze on Aluminum
		WT	White on Aluminum

Transformer Required (order separately)

Example: 3021-30BZ

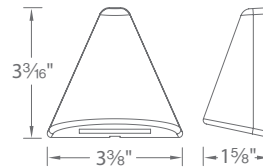

3031

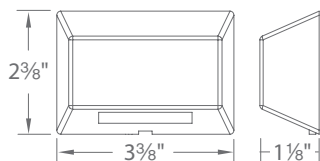

Input	9-15VAC
Power	2.8W / 4.6VA
Brightness	75 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	90
Rated Life	50,000 hours

3031-27	2700K	BK	Black on Aluminum
3031-30	3000K	BBR	Bronze on Brass
		BZ	Bronze on Aluminum
		WT	White on Aluminum

Transformer Required (order separately)

Example: 3031-27BZ

See photometric data for 3011, 3021, 3031 on page 123
6' lead wire and direct burial gel filled wire nuts included

STEP LIGHTS LED LANDSCAPE

- Invisible hardware
- IP66 Rated, protected against high-pressure water jets
- Constant output for 9V-15V input
- 100%-10% dimming



visit product
page online

12V RECTANGULAR STEP AND WALL LIGHTS

LED LANDSCAPE




SQUARE STEP LIGHTS

- Solid stainless steel construction
- Includes a spring clip for wall or step applications
- 6' lead wire

12V

Input	9-15VAC
Power	4.1W / 6.6VA
Brightness	55 lm
Color Temp	2700K Warm white, 3000K Pure white
CRI	85
Rated Life	70,000 hours

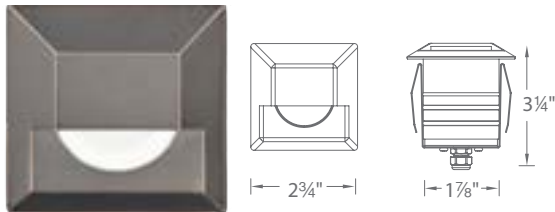

SQUARE 2061

2700K & 3000K Warm White & Pure White


2061-27	BS Bronzed Stainless Steel
2061-30	SS Stainless Steel

Example: 2061-30-BS



RECTANGLE STEP LIGHTS

- Corrosion resistant aluminum alloy, or cast stainless steel construction
- Anti-microbial white paint




12V

Input	9-15VAC
Power	2W / 3.1VA
Brightness	Up to 38 lm
Color Temp	2700K & 3000K & Amber
CRI	90
Rated Life	60,000 hours

120V

Input	110-120VAC
Power	3.5W
Brightness	Up to 65 lm
Color Temp	3000K Pure White
CRI	90
Rated Life	54,000 hours

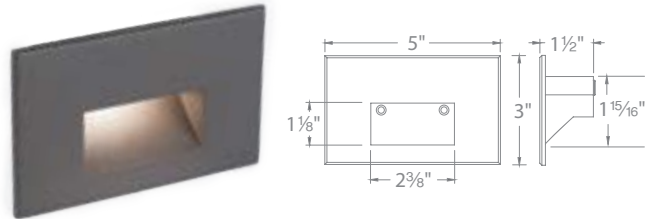

12V


4011-27	2700K
4011-30	3000K
4011-AM	Amber

120V

WL-LED100-C	3000K
WL-LED100-AM	Amber

BBR*	Bronze on Brass
BZ	Bronze on Aluminum
BK	Black on Aluminum
WT	White on Aluminum
SS*	Cast Stainless Steel

Example: 4011-30-BZ

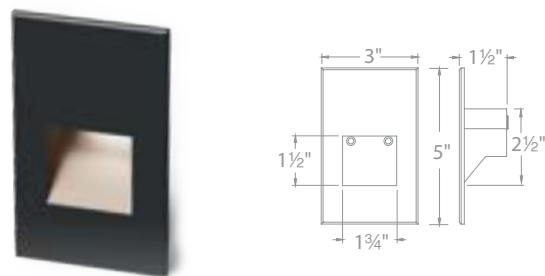

12V

4021-27	2700K
4021-30	3000K
4021-AM	Amber

120V

WL-LED200-C	3000K
WL-LED200-AM	Amber

BBR*	Bronze on Brass
BZ	Bronze on Aluminum
BK	Black on Aluminum
WT	White on Aluminum
SS*	Cast Stainless Steel

Example: 4021-27-BK

*Cast Stainless Steel finish is only available in 3000K and Amber colors.

**SURFACE MOUNTED STEP LIGHT LED LANDSCAPE
LOW PROFILE INSTALLATION**




visit product
page online

- Constant output for 9V-15V input
- May be used in conjunction with all WAC® Landscape Lighting products

SURFACE MOUNTED STEP LIGHT LED LANDSCAPE LOW PROFILE INSTALLATION



- Slim, low profile design-surface mount installation
- Junction box not required
- Die-cast aluminum or die-cast brass
- Invisible hardware
- 6' lead wire included
- Compatible with WAC® 12V Landscape Transformers
(sold separately)

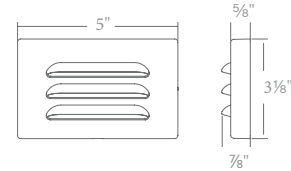


4501-27

4501

Input: 9-15V
Power: 4W/6.5VA
Brightness: 55 lm
Color Temp: 2700K Warm white, 3000K Pure white
CRI: 90
Rated Life: 70,000 hours

Model	Color	Finish
4501-27	2700K	BK Black on Aluminum
		BZ Bronze on Aluminum
		WT White on Aluminum
		BBR Bronze on Brass
4501-30	3000K	BK Black on Aluminum
		BZ Bronze on Aluminum
		WT White on Aluminum
		BBR Bronze on Brass

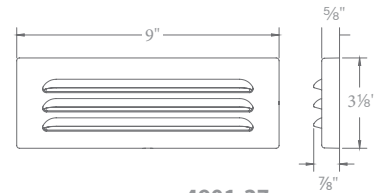


4901-27

4901

Input: 9-15V
Power: 8W/12VA
Brightness: 100 lm
Color Temp: 2700K Warm white, 3000K Pure white
CRI: 90
Rated Life: 70,000 hours

Model	Color	Finish
4901-27	2700K	BK Black on Aluminum
		BZ Bronze on Aluminum
		WT White on Aluminum
		BBR Bronze on Brass
4901-30	3000K	BK Black on Aluminum
		BZ Bronze on Aluminum
		WT White on Aluminum
		BBR Bronze on Brass

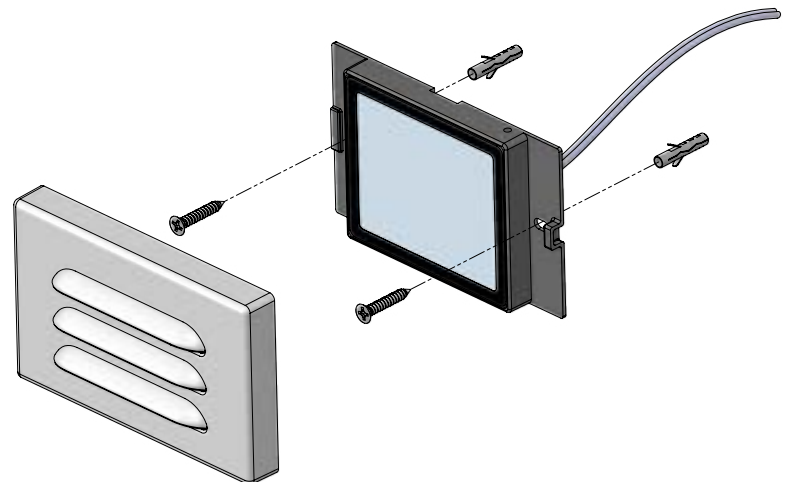

Fixture can be mounted directly to the wall without a junction box

12V & 120V RECTANGULAR STEP & WALL LIGHTS



LED LANDSCAPE



Input:	12V	120V
Brightness:	Up to 4 lm	Up to 4 lm
CRI:	90	90
Dimming:	100% - 10% MLV	100% - 10% ELV
Rated Life:	60,000 hours	50,000 hours

- Fluid decorative profile with full cut-off illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 Compliant (120V only)

Transformer Required (order separately)

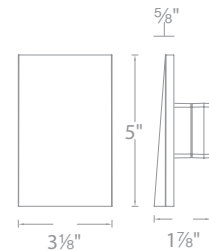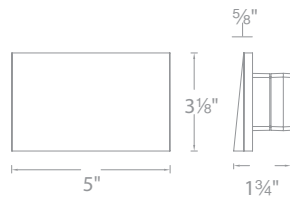

Voltage	Power	Model	Color Temp	Finishes
12V	2W / 3.1VA	4031-27	2700K	BK Black on AL
		4031-30	3000K	BZ Bronze on AL
		4031-AM	Amber	WT White on AL
120V	3.5W	WL-LED110-C WL-LED110-AM	3000K	BN Brushed Nickel on AL
				BK Black on AL
				BZ Bronze on AL
				WT White on AL

Voltage	Power	Model	Color Temp	Finishes
12V	2W / 3.1VA	4041-27	2700K	BK Black on AL
		4041-30	3000K	BZ Bronze on AL
		4041-AM	Amber	WT White on AL
120V	3.5W	WL-LED210-C WL-LED210-AM	3000K	BN Brushed Nickel on AL
				BK Black on AL
				BZ Bronze on AL
				WT White on AL

Example: **4031-30WT**

Example: **WL-LED110-C-WT**



Example: **4041-30BK**

Example: **WL-LED210-C-BK**

Input:	12V	120V
Brightness:	Up to 2 lm	Up to 3 lm
CRI:	90	90
Dimming:	100% - 10% MLV	100% - 10% ELV
Rated Life:	60,000 hours	50,000 hours

- Geometric design with downward illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 Compliant (120V only)

Transformer Required (order separately)



IP66 Rated self contained fixture with various face plates.
Fits into a switch box or a 2" x 4" junction box with minimum inside dimensions of 3"L x 2"W x 2.5"D.

Voltage	Power	Model	Color Temp	Finishes
12V	2W / 3.1VA	4091-27	2700K	BK Black on AL
		4091-30	3000K	BZ Bronze on AL
		4091-AM	Amber	WT White on AL
120V	3.5W	WL-LED140-C	3000K	BK Black on AL
		WL-LED140-AM	Amber	BZ Bronze on AL
				WT White on AL

Example: **4091-30BK**

Example: **WL-LED140-C-BK**

AL - Aluminum



visit product page online



12V & 120V RECTANGULAR STEP & WALL LIGHTS

LED LANDSCAPE

Input:	12V	120V
Brightness:	Up to 28 lm	Up to 40 lm
CRI:	90	90
Dimming:	100% - 10% MLV	100% - 10% ELV
Rated Life:	60,000 hours	50,000 hours

- Tempered glass diffuses light for even illumination
- Die-cast aluminum construction with abrasion-resistant powder-coated finish, or marine-grade stainless steel option available
- Title 24 Compliant (120V only)

Transformer Required (order separately)

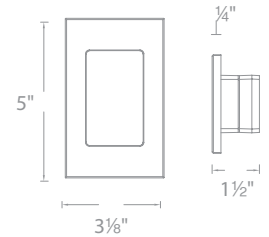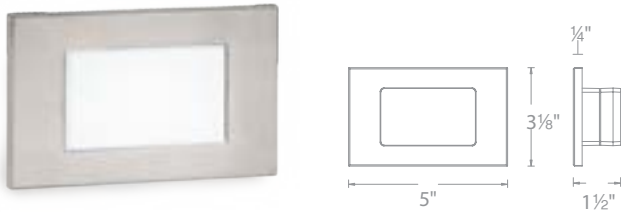

Mounts Vertically or Horizontally


Voltage	Power	Model	Color Temp	Finishes
12V	2W / 3.1VA	4071-27	2700K	BK Black on AL
		4071-30	3000K	BZ Bronze on AL
		4071-AM	Amber	SS Stainless Steel
120V	3.5W	WL-LED130-C	3000K	WT White on AL
		WL-LED130-AM	Amber	BK Black on AL
				BZ Bronze on AL
				SS Stainless Steel
				WT White on AL

Example: **4071-27SS**

Example: **WL-LED130-C-SS**

Input:	12V	120V
Brightness:	Up to 17 lm	Up to 36 lm
CRI:	90	90
Dimming:	100% - 10% MLV	100% - 10% ELV
Rated Life:	60,000 hours	50,000 hours

Transformer Required (order separately)

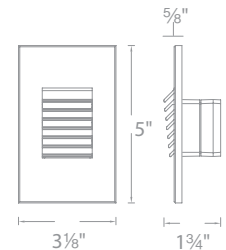

Voltage	Power	Model	Color Temp	Finishes
12V	2W / 3.1VA	4051-27	2700K	BK Black on AL
		4051-30	3000K	BZ Bronze on AL
		4051-AM	Amber	WT White on AL
120V	3.5W	WL-LED120-C	3000K	BK Black on AL
		WL-LED120-AM	Amber	BZ Bronze on AL
				WT White on AL

Example: **4051-30BZ**

Example: **WL-LED120-C-BZ**

AL - Aluminum

Voltage	Power	Model	Color Temp	Finishes
12V	2W / 3.1VA	4061-27	2700K	BK Black on AL
		4061-30	3000K	BZ Bronze on AL
		4061-AM	Amber	WT White on AL
120V	3.5W	WL-LED220-C	3000K	BK Black on AL
		WL-LED220-AM	Amber	BZ Bronze on AL
				WT White on AL

Example: **4061-30BZ**

Example: **WL-LED220-C-BZ**

AL - Aluminum

- Louvered design shields glare for visual interest
- Die-cast aluminum construction with abrasion-resistant powder-coated finish
- Title 24 Compliant (120V only)



visit product page online

TRANSFORMERS LED LANDSCAPE








From our fully adjustable integrated LED accent light to our submersible in-grounds, every product is engineered to work well together as a fully integrated solution. We have everything you need whether you're lighting a small jewel of a garden or a sublime outdoor oasis, all connected to the same transformer.

Model	
9075-TRN-SS	75W Max Dimensions: 13.97"L x 5.35"W x 5.63"H
9150-TRN-SS	150W Max Dimensions: 18.90"L x 6.69"W x 6.30"H
9300-TRN-SS	300W Max Dimensions: 18.90"L x 6.69"W x 6.30"H
9600-TRN-SS	600W Max (2 x 300W outputs) Dimensions: 14.49"L x 10.08"W x 5.94"H

- IP65 Rated
- 12V to 15V taps
- Knockouts for power and photo sensor connections
- 3-prong outlet for timer
- Outdoor Rated stainless steel transformer contains an outdoor Rated 3-prong plug for power



Accessories LED LANDSCAPE














Mechanical Timer		9000-MTI-WT	White	Connect within the transformer
Photosensor		9000-PCH-GY	1000VA Max	Attached directly to the transformer
Photosensor - Remote		9000-PCR-GY	1000VA Max	If transformer is located in a shady spot, this photosensor has a 10 foot cord and a stainless steel bracket to secure in a sunny area
Direct Burial Water proof Wire Nuts		9020-WNT-BK		Silicone filled wire nut with gasket (Pack of 20pcs)
12V Direct Burial Outdoor Cable		9100-12G-BK 9250-12G-BK 9500-12G-BK	100 feet 12 gauge 250 feet 12 gauge 500 feet 12 gauge	







visit product page online

ACCESSORIES LED LANDSCAPE

Mounting & Glare Control Accessories LED LANDSCAPE

5" Long Shroud For 5211 Grand Accent		5211-LSHR-BK 5211-LSHR-BZ 5211-LSHR-BBR	Reduce glare; ideal for downlighting application
6" Long Shroud For 5011/5012 Accent		5010-LSHR-BZ 5010-LSHR-BBR 5010-LSHR-BK	Reduce glare; ideal for downlighting application
5" Long Shroud For 5111 Mini Accent		5111-LSHR-BZ 5111-LSHR-BBR 5111-LSHR-BK	Reduce glare; ideal for downlighting application
Grand Accent Snoot		5211-SNOOT-BK 5211-SNOOT-BZ 5211-SNOOT-BBR	Reduce glare; ideal for downlighting application
Accent Snoot		5010-SNOOT-BK 5010-SNOOT-BZ 5010-SNOOT-BBR	Reduce glare; ideal for downlighting application
Mini Accent Snoot		5111-SNOOT-BK 5111-SNOOT-BZ 5111-SNOOT-BBR	Reduce glare; ideal for downlighting application
9" Mounting Stake		9000-ST9-BZ	Durable PC stake
14" Mounting Stake		9000-ST14-BZ	Durable PC stake
Surface Mount Flange/Stake		5000-SCP-BZ 5000-SCP-BBR 5000-SCP-BK	Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box
Guardian Mount		9000-SP9-BZ	Heavy duty stainless steel spike to position fixture
Gutter Mount Bracket		5000-GM-BK 5000-GM-BZ	Stainless steel universal mounting bracket for gutter mounting fixture
Tree Mount Junction Box		5000-TCP-BK 5000-TCP-BZ	Aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed
		5000-TCL-BK 5000-TCL-BZ	Large aluminum box with stainless steel mounting screws; two 1/2" NPT threaded holes, UL 120V listed
Large Tree Mount Canopy Strap		5000-TST-BK	Ratcheting device with strap to be used with Large Tree Mount Junction Box (5000-TCL)
		5000-STB-BK	Tree mount bracket only

Optic Accessories LED LANDSCAPE

Grand Accent Optics		LENS-25-AMB LENS-25-GRN LENS-25-RED	Amber Green Red	LENS-25-BLU LENS-25-FR LENS-25-SPR	Blue Frosted Spread	5211-HCL LENS-25-BEL	Honeycomb Louver Elongating Beam
Accent Optics		LENS-20-AMB LENS-20-GRN LENS-20-RED	Amber Green Red	LENS-20-BLU LENS-20-FR LENS-20-SPR	Blue Frosted Spread	5011-HCL LENS-20-BEL	Honeycomb Louver Elongating Beam
Mini Accent Optics		LENS-16-AMB LENS-16-GRN LENS-16-RED	Amber Green Red	LENS-16-BLU LENS-16-FR LENS-16-SPR	Blue Frosted Spread	5111-HCL LENS-16-BEL	Honeycomb Louver Elongating Beam
Mini Wall Wash Optics		LENS-2X3-AMB LENS-2X3-GRN LENS-2X3-RED	Amber Green Red	LENS-2X3-BLU LENS-2X3-FR LENS-2X3-SPR	Blue Frosted Spread	LENS-2X3-BEL	Elongating Beam
Wall Wash Optics		LENS-2X4-AMB LENS-2X4-GRN LENS-2X4-RED	Amber Green Red	LENS-2X4-BLU LENS-2X4-FR LENS-2X4-SPR	Blue Frosted Spread		
NEMA wall wash- optics		LENS-3X5-AMB LENS-3X5-GRN LENS-3X5-RED	Amber Green Red	LENS-3X5-BLU LENS-3X5-FR LENS-3X5-SPR	Blue Frosted Spread	LENS-3X5-BEL	Elongating Beam

LINE VOLTAGE LED LANDSCAPE OFFERING




ACCENT 120V **PATENTED**

Integral brightness control, adjustable beam angle



Power 3.5W to 14.5W
 Brightness 100lm to 900lm
 Beam Angle 15° to 60°
 CRI 85
 Color Temp 3000K Pure White
 Rated Life 45,000 hours
 Listing IP-66

Detachable shroud
 6' lead wire and wire nuts included
 See photometric data on pages 118

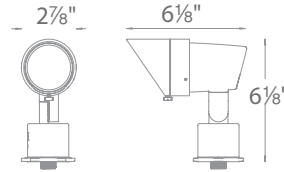

Model Finishes

5012-30BK Black on Aluminum
5012-30BZ Bronze on Aluminum
5012-30BBR Bronze on Brass


WALL WASH 120V **PATENTED**

Integral brightness control



Power 3.5W to 14.5W
 Brightness 95lm to 855lm
 Beam Angle 15° upward (50° by 80°)
 CRI 85
 Color Temp 3000K Pure White
 Rated Life 45,000 hours
 Listing IP-66

6' lead wire and wire nuts included
 See photometric data on pages 124



Model Finishes

5022-30BK Black on Aluminum
5022-30BZ Bronze on Aluminum
5022-30BBR Bronze on Brass

3" INGROUND 120V **PATENTED**

Integral brightness control, adjustable beam angle



Power 3W to 11.5W
 Brightness 65lm to 515lm
 Beam Angle 15° to 60°
 CRI 85
 Color Temp 3000K Pure White
 Rated Life 45,000 hours
 Listing IP-67

6' lead wire and wire nuts include
 See photometric data on pages 122



Model Finishes

5032-30BZ Bronze on Aluminum
5032-30BBR Bronze on Brass

BOLLARDS 120V-277V



Scoop
See pages 69-70



Chamber
See pages 71-74



Tower
See pages 75-76



Archetype
See pages 77-78



SHINING FROM THE BACKGROUND

Like professional stagehands, these high-performers easily disappear into the backdrop with their diminutive sizes while adaptably making the whole show possible

Featuring product: **5012-30BZ** Accent



visit product
page online


Endurance® LED BRICK LIGHTS



visit product page online

- Option to easily retrofit Hadco or Kichler incandescent brick lights using the existing housings
- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed

Open Illumination Brick Light

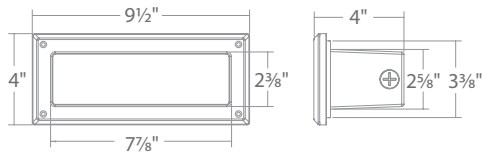


WL-5105
Opal

Input	120V
Power	5.5W
Brightness	Up to 110 lm
Color tem	3000K Pure White
CRI	90
Dimming:	100% - 10% ELV
Rated Life	80,000 hours

WL-5105-30

- aBK** Architectural Black
- aBZ** Architectural Bronze
- aGH** Architectural Graphite
- aWT** Architectural White

Low Glare Brick Light

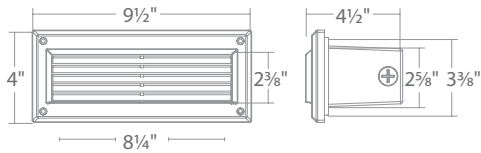

WL-5205
Louver

Input	120V
Power	5.5W
Brightness	Up to 45 lm
Color Temp	3000K Pure White
CRI	90
Dimming:	100% - 10% ELV
Rated Life	80,000 hours

WL-5205-30


- aBK** Architectural Black
- aBZ** Architectural Bronze
- aGH** Architectural Graphite
- aWT** Architectural White



visit product
page online

Endurance® LED FLOOD LIGHTS

TWO LEVELS OF BRIGHTNESS, SAME COMPACT SIZE

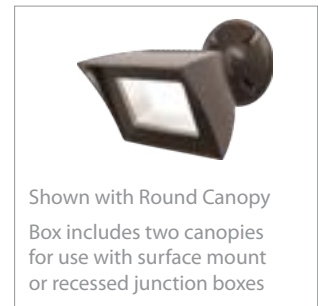

Input 120V
 CRI 90
 Dimming: 100% - 10% ELV
 Rated Life 54,000 hours

- Breathable waterproof technology and factory-sealed LED light engine ensures fixture can maintain stable atmospheric pressure and prevent condensation
- Die-cast aluminum construction
- Specify 2 lumen packages using the same sized fixture for building facade design integrity
- 120V direct wire—no driver needed
- 1/2" threaded heavy-duty mounting arm
- Photo or motion sensor sold separately

			Power	Comparable	Color Temp	Delivered Lumens	Finish
	Flood	WP-LED335	35.5W	100W HID	30 3000K 50 5000K	2450 2730	aBK Architectural Black aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White
	Flood Pro	WP-LED354	53W	150W HID	35 3500K	3445	

Example: **WP-LED354-35-aWT**


MOTION SENSOR (120V)

Available in 4 complementary colors



PHOTOSENSOR (120V)

Available in 4 complementary colors

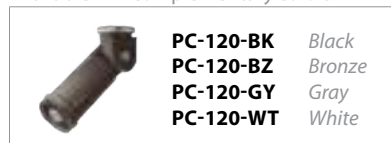

Endurance® LED FLOOD LIGHTS

SINGLE SPOT



Input: 120V
CRI: 85
Dimming: 100% - 10% ELV
Rated Life: 50,000 hours

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed
- Photo/motion sensor sold separately

		Power	Comparable	Color Temp	Delivered		Finish
					Lumens		
	WP-LED415	15W	75W Halogen	30	3000K	965	aBK Architectural Black aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White
				50	5000K	1030	

Example: WP-LED415-30-AWT



visit product page online

PHOTOSENSOR (120V)
Available in 4 complementary colors

	PC-120-BK	Black
	PC-120-BZ	Bronze
	PC-120-GY	Gray
	PC-120-WT	White

MOTION SENSOR (120V)
Available in 4 complementary colors

	MS-120-BK	Black
	MS-120-BZ	Bronze
	MS-120-GY	Gray
	MS-120-WT	White

Endurance® LED FLOOD LIGHTS

DOUBLE SPOT



Input: 120V
CRI: 85
Dimming: 100% - 10% ELV
Rated Life: 50,000 hours


- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed
- Photo/motion sensor sold separately

	Power	Comparable	Color Temp	Delivered Lumens	Finish
	30W	2 x 75W Halogen	30 3000K 50 5000K	965 x2 1030 x2	aBK Architectural Black aBZ Architectural Bronze aGH Architectural Graphite aWT Architectural White

Example: WP-LED430-30-ABZ

PHOTOSENSOR (120V)

Available in 4 complementary colors

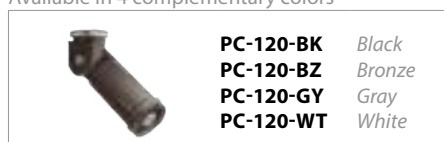

MOTION SENSOR (120V)

Available in 4 complementary colors



visit product page online


Endurance® WALL-MOUNTED LED SPOTLIGHT

DESIGNED FOR SIGN LIGHTING OR WALL-MOUNTED LIGHTING IN ANY DIRECTION

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 120V direct wire - no driver needed



DOUBLE WP-LED529

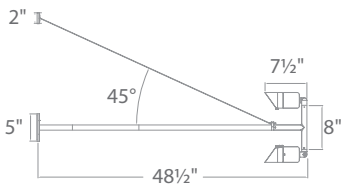

Input	120V
Power	30W
Brightness	Up to 1140 lm x2
Comparable	150W x2 PAR 38
Color Temp	3000K & 4000K
CRI	85
Dimming:	100% - 10% ELV
Rated Life	50,000 hours

3000K & 4000K *Pure White*


- aBK** *Architectural Black*
- aBZ** *Architectural Bronze*
- aGH** *Architectural Graphite*
- aWT** *Architectural White*

PHOTOMETRICS

Beam Setting	Power 15W Per Head		
	Distance	Foot Candles	Beam Diameter
15°	2ft	1035.8fc	0.5ft
	3ft	460.3fc	1.0ft
	4ft	258.9fc	1.0ft
25°	2ft	600.0fc	1.0ft
	3ft	266.7fc	1.5ft
	4ft	150.0fc	2.0ft
40°	2ft	378.0fc	1.5ft
	3ft	168.0fc	2.0ft
	4ft	94.5fc	3.0ft
60°	2ft	218.8fc	2.5ft
	3ft	92.7fc	3.5ft
	4ft	54.7fc	4.5ft




visit product page online

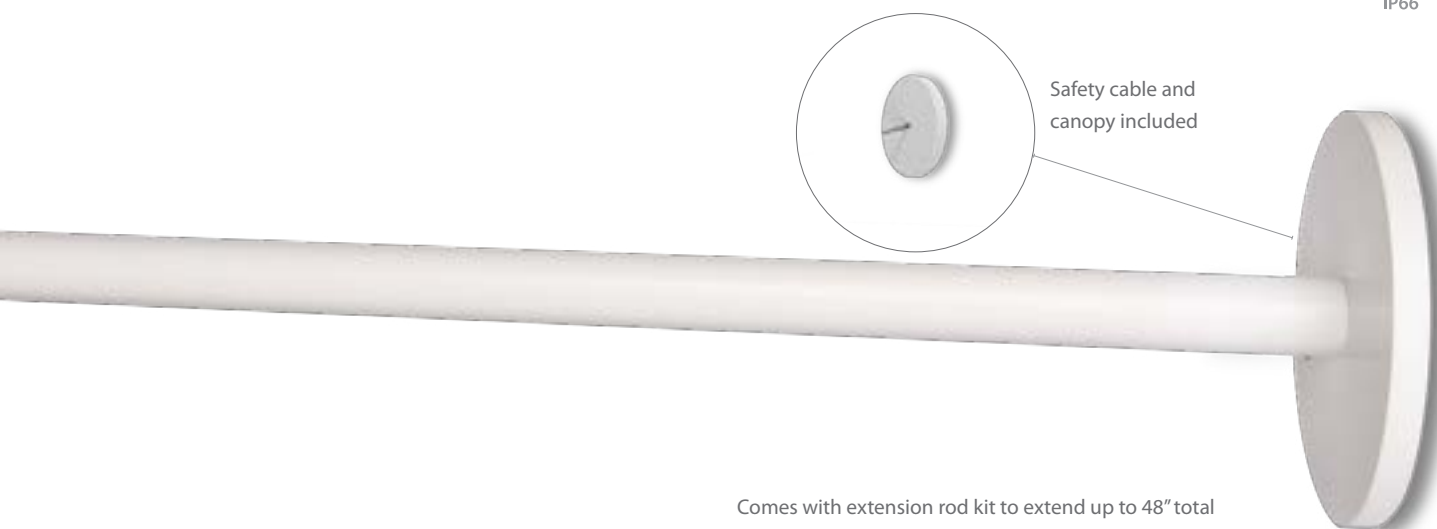

Comes with extension rod kit to extend up to 48" total



**SINGLE
WP-LED514**

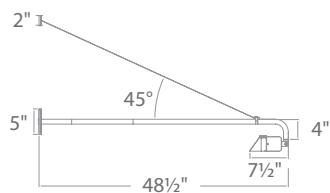

Input	120V
Power	15W
Brightness	Up to 1140 lm
Comparable	150W PAR 38
Color Temp	3000K & 4000K
CRI	85
Dimming:	100% - 10% ELV
Rated Life	50,000 hours

3000K & 4000K *Pure White & Cool White*

aBK	<i>Architectural Black</i>
aBZ	<i>Architectural Bronze</i>
aGH	<i>Architectural Graphite</i>
aWT	<i>Architectural White</i>

WP-LED514-30
WP-LED514-40



visit product page online

Endurance® LED WALL PACKS




FIN

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 20° forward throw illumination
- Built-in level for easy adjustment
- Photo/Motion sensor sold separately



Tempered Prismatic Glass
Reduces glare while optimizing light distribution

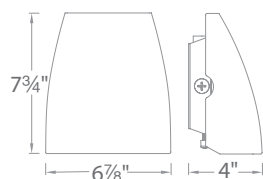

Input	120V-277V
Power	19W/27W/35W
Brightness	Delivered 1390/2075/2750 lm
Comparable	39W/70W/100W HID
Color Temp	3000K
CRI	85
Dimming:	100% - 10% ELV or 0-10V
Rated Life	100,000 hours

3000K *Pure White*

WP-LED119-30	aBZ <i>Architectural Bronze</i>
WP-LED127-30	aGH <i>Architectural Graphite</i>
WP-LED135-30	aWT <i>Architectural White</i>

MOTION SENSOR (120V)
Available in 3 complementary colors



- MS-120-BZ** *Bronze*
- MS-120-GY** *Gray*
- MS-120-WT** *White*

PHOTOSENSOR (120V)
Available in 3 complementary colors



- PC-120-BZ** *Bronze*
- PC-120-GY** *Gray*
- PC-120-WT** *White*




visit product page online

Endurance® LED WALL PACKS



HAWK

- Factory-sealed LED light engine
- Die-cast aluminum construction
- 20° forward throw illumination
- Built-in level for easy adjustment
- Photo/Motion sensor sold separately

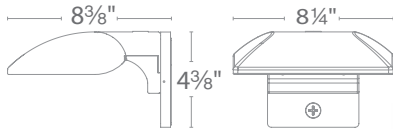

Input	120V-277V
Power	19W/27W
Brightness	Delivered 1435 lm/2095 lm
Comparable	39W HID/70W HID
Color Temp	3000K
CRI	85
Dimming:	100% - 10% ELV or 0-10V
Rated Life	100,000 hours



3000K

Pure White

WP-LED219-30	aBZ	<i>Architectural Bronze</i>
WP-LED227-30	aGH	<i>Architectural Graphite</i>
	aWT	<i>Architectural White</i>



Mounts in any orientation for direct and indirect illumination



Includes box sleeve. For use with surface mount junction boxes

MOTION SENSOR (120V)

Available in 3 complementary colors



MS-120-BZ	<i>Bronze</i>
MS-120-GY	<i>Gray</i>
MS-120-WT	<i>White</i>

PHOTOSENSOR (120V)

Available in 3 complementary colors




PC-120-BZ	<i>Bronze</i>
PC-120-GY	<i>Gray</i>
PC-120-WT	<i>White</i>



visit product page online

RUBIX LED DECORATIVE CEILING MOUNTS

Input: 120-277V Color Temp: 3000K Pure White
 Dimming: 100% - 10% CRI: 90
 ELV or 0-10V Rated Life: 70,000 hours




- Ceiling mount
- Die-cast aluminum construction

Beam 86°
 Power 16W
 Brightness 750 lm

FM-W2505

- AL** *Brushed Aluminum*
- BK** *Black*
- BZ** *Bronze*
- GH** *Graphite*
- WT** *White*

Example: FM-W2505-BK



- Ceiling mount
- Die-cast aluminum construction

Beam 95°
 Power 30W
 Brightness 1875 lm

FM-W2510

- AL** *Brushed Aluminum*
- BK** *Black*
- BZ** *Bronze*
- GH** *Graphite*
- WT** *White*

Example: FM-W2510-BK



visit product page online

RUBIX LED DECORATIVE WALL MOUNTS

- Mounts up or down
- Die-cast aluminum construction

Input: 120-277V Color Temp: 3000K Pure White
 Dimming: 100% - 10% ELV or 0-10V CRI: 90
 Rated Life: 70,000 hours



WALL MOUNT



Single light
WS-W2509



Beam 86°
 Power 16W
 Brightness 805 lm

WS-W2509

- AL** Brushed Aluminum
- BK** Black
- BZ** Bronze
- GH** Graphite
- WT** White


Example: WS-W2509-WT



WALL MOUNT



Up & Down light
WS-W2510



Beam 86°
 Power 30W
 Brightness 1385 lm

WS-W2510

- AL** Brushed Aluminum
- BK** Black
- BZ** Bronze
- GH** Graphite
- WT** White


Example: WS-W2510-WT



WALL MOUNT



Single light
WS-W2504



Beam 86°
 Power 16W
 Brightness 750 lm

Up & Down light
WS-W2505

Beam 86°
 Power 30W
 Brightness 1400 lm

WS-W2504
WS-W2505

- AL** Brushed Aluminum
- BK** Black
- BZ** Bronze
- GH** Graphite
- WT** White

Example: WS-W2504-BZ




visit product page online

TUBE LED DECORATIVE PENDANT

Input: 120-277V Color Temp: 3000K Pure White
 Dimming: 100% - 10% CRI: 90
 ELV 0-10V Rated Life: 70,000 hours

PENDANT

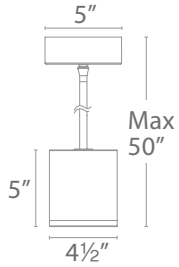

- Die-cast aluminum construction
- Hang straight swivel
- Three 12" and one 6" down rods included

Beam 33°
 Power 16W
 Brightness 800 lm


PD-W2605

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: PD-W2605-BK



TUBE LED DECORATIVE CEILING MOUNTS




- Ceiling mount
- Die-cast aluminum construction

Beam 35°
 Power 16W
 Brightness 800 lm

FM-W2605

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: FM-W2605-WT



- Ceiling mount
- Die-cast aluminum construction

Beam 91°
 Power 30W
 Brightness 1740 lm

FM-W2612

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: FM-W2612-GH




visit product page online

TUBE LED DECORATIVE WALL MOUNTS

Input: 120-277V Color Temp: 3000K Pure White
 Dimming: 100% - 10% CRI: 90
 ELV or 0-10V Rated Life: 70,000 hours



4" SINGLE LIGHT WALL MOUNT



- Mounts up or down
- Die-cast aluminum construction

Beam 33°
 Power 16W
 Brightness 800 lm


WS-W2605

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: WS-W2605-AL



4" DOUBLE LIGHT WALL MOUNT



- Die-cast aluminum construction

Beam 33°
 Power 30W
 Brightness 1750 lm

WS-W2604

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: WS-W2604-AL



SINGLE LIGHT WALL MOUNT



- Mounts up or down
- Die-cast aluminum construction

Beam 70°
 Power 16W
 Brightness 825 lm

WS-W2609

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: WS-W2609-BK



DOUBLE LIGHT WALL MOUNT



- Die-cast aluminum construction

Beam 70°
 Power 30W
 Brightness 1525 lm

WS-W2610

WT White
BK Black
BZ Bronze
GH Graphite
AL Brushed Aluminum

Example: WS-W2610-BK




visit product page online

LANDSCAPE


GRAND ACCENT 12V PHOTOMETRICS

At 15° Setting




POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	260.4fc	1.1ft	418.4fc	1.1ft	465.4fc	1.1ft	521.4fc	1.1ft	549.3fc	1.1ft
8ft	65.1fc	2.1ft	104.6fc	2.1ft	116.4fc	2.1ft	130.4fc	2.1ft	137.3fc	2.1ft
12ft	28.9fc	3.2ft	46.5fc	3.2ft	51.7fc	3.2ft	57.9fc	3.2ft	61.0fc	3.2ft
16ft	16.3fc	4.2ft	26.2fc	4.2ft	29.1fc	4.2ft	32.6fc	4.2ft	34.3fc	4.2ft
24ft	7.2fc	6.3ft	11.6fc	6.3ft	12.9fc	6.3ft	14.5fc	6.3ft	15.3fc	6.3ft
32ft	4.1fc	8.4ft	6.5fc	8.4ft	7.3fc	8.4ft	8.1fc	8.4ft	8.6fc	8.4ft
40ft	2.6fc	10.5ft	4.2fc	10.5ft	4.7fc	10.5ft	5.2fc	10.5ft	5.5fc	10.5ft
48ft	1.8fc	12.6ft	2.9fc	12.6ft	3.2fc	12.6ft	3.6fc	12.6ft	3.8fc	12.6ft
60ft	1.2fc	15.8ft	1.9fc	15.8ft	2.1fc	15.8ft	2.3fc	15.8ft	2.4fc	15.8ft

At 25° Setting




POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	198.0fc	1.8ft	323.3fc	1.8ft	362.6fc	1.8ft	399.3fc	1.8ft	418.4fc	1.8ft
8ft	49.5fc	3.5ft	80.8fc	3.5ft	90.7fc	3.5ft	99.8fc	3.5ft	104.6fc	3.5ft
12ft	22.0fc	5.3ft	35.9fc	5.3ft	40.3fc	5.3ft	44.4fc	5.3ft	46.5fc	5.3ft
16ft	12.4fc	7.1ft	20.2fc	7.1ft	22.7fc	7.1ft	25.0fc	7.1ft	26.2fc	7.1ft
24ft	5.5fc	10.6ft	9.0fc	10.6ft	10.1fc	10.6ft	11.1fc	10.6ft	11.6fc	10.6ft
32ft	3.1fc	14.2ft	5.1fc	14.2ft	5.7fc	14.2ft	6.2fc	14.2ft	6.5fc	14.2ft
40ft	2.0fc	17.7ft	3.2fc	17.7ft	3.6fc	17.7ft	4.0fc	17.7ft	4.2fc	17.7ft
48ft	1.4fc	21.3ft	2.2fc	21.3ft	2.5fc	21.3ft	2.8fc	21.3ft	2.9fc	21.3ft
60ft	0.9fc	26.6ft	1.4fc	26.6ft	1.6fc	26.6ft	1.8fc	26.6ft	1.9fc	26.6ft

At 40° Setting



POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	107.4fc	2.9ft	167.4fc	2.9ft	191.5fc	2.9ft	210.8fc	2.9ft	223.2fc	2.9ft
8ft	26.8fc	5.8ft	41.9fc	5.8ft	47.9fc	5.8ft	52.7fc	5.8ft	55.8fc	5.8ft
12ft	11.9fc	8.7ft	18.6fc	8.7ft	21.3fc	8.7ft	23.4fc	8.7ft	24.8fc	8.7ft
16ft	6.7fc	11.6ft	10.5fc	11.6ft	12.0fc	11.6ft	13.2fc	11.6ft	13.9fc	11.6ft
24ft	3.0fc	17.5ft	4.7fc	17.5ft	5.3fc	17.5ft	5.9fc	17.5ft	6.2fc	17.5ft
32ft	1.7fc	23.3ft	2.6fc	23.3ft	3.0fc	23.3ft	3.3fc	23.3ft	3.5fc	23.3ft
40ft	1.1fc	29.1ft	1.7fc	29.1ft	1.9fc	29.1ft	2.1fc	29.1ft	2.2fc	29.1ft
48ft	0.7fc	34.9ft	1.2fc	34.9ft	1.3fc	34.9ft	1.5fc	34.9ft	1.5fc	34.9ft
60ft	0.5fc	43.7ft	0.7fc	43.7ft	0.9fc	43.7ft	0.9fc	43.7ft	1.0fc	43.7ft


At 60° Setting





POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	50.1fc	4.6ft	79.4fc	4.6ft	91.6fc	4.6ft	100.1fc	4.6ft	105.4fc	4.6ft
8ft	12.5fc	9.2ft	19.8fc	9.2ft	22.9fc	9.2ft	25.0fc	9.2ft	26.3fc	9.2ft
12ft	5.6fc	13.9ft	8.8fc	13.9ft	10.2fc	13.9ft	11.1fc	13.9ft	11.7fc	13.9ft
16ft	3.1fc	18.5ft	5.0fc	18.5ft	5.7fc	18.5ft	6.3fc	18.5ft	6.6fc	18.5ft
24ft	1.4fc	27.7ft	2.2fc	27.7ft	2.5fc	27.7ft	2.8fc	27.7ft	2.9fc	27.7ft
32ft	0.8fc	37.0ft	1.2fc	37.0ft	1.4fc	37.0ft	1.6fc	37.0ft	1.6fc	37.0ft
40ft	0.5fc	46.2ft	0.8fc	46.2ft	0.9fc	46.2ft	1.0fc	46.2ft	1.1fc	46.2ft
48ft	0.3fc	55.4ft	0.6fc	55.4ft	0.6fc	55.4ft	0.7fc	55.4ft	0.7fc	55.4ft
60ft	0.2fc	69.3ft	0.4fc	69.3ft	0.4fc	69.3ft	0.4fc	69.3ft	0.5fc	69.3ft


LANDSCAPE

GRAND ACCENT 120V PHOTOMETRICS

At 15° Setting	POWER	13W		16W		21W		26W		31W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	298.8fc	1.1ft	356.4fc	1.1ft	457.7fc	1.1ft	541.1fc	1.1ft	613.5fc	1.1ft
	8ft	74.7fc	2.1ft	89.1fc	2.1ft	114.4fc	2.1ft	135.3fc	2.1ft	153.4fc	2.1ft
	12ft	33.2fc	3.2ft	39.6fc	3.2ft	50.9fc	3.2ft	60.1fc	3.2ft	68.2fc	3.2ft
	16ft	18.7fc	4.2ft	22.3fc	4.2ft	28.6fc	4.2ft	33.8fc	4.2ft	38.3fc	4.2ft
	24ft	8.3fc	6.3ft	9.9fc	6.3ft	12.7fc	6.3ft	15.0fc	6.3ft	17.0fc	6.3ft
	32ft	4.7fc	8.4ft	5.6fc	8.4ft	7.2fc	8.4ft	8.5fc	8.4ft	9.6fc	8.4ft
	40ft	3.0fc	10.5ft	3.6fc	10.5ft	4.6fc	10.5ft	5.4fc	10.5ft	6.1fc	10.5ft
	48ft	2.1fc	12.6ft	2.5fc	12.6ft	3.2fc	12.6ft	3.8fc	12.6ft	4.3fc	12.6ft
	60ft	1.3fc	15.8ft	1.6fc	15.8ft	2.0fc	15.8ft	2.4fc	15.8ft	2.7fc	15.8ft

At 25° Setting	POWER	13W		16W		21W		26W		31W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	238.8fc	1.8ft	281.6fc	1.8ft	356.1fc	1.8ft	424.5fc	1.8ft	474.8fc	1.8ft
	8ft	59.7fc	3.5ft	70.4fc	3.5ft	89.0fc	3.5ft	106.1fc	3.5ft	118.7fc	3.5ft
	12ft	26.5fc	5.3ft	31.3fc	5.3ft	39.6fc	5.3ft	47.2fc	5.3ft	52.8fc	5.3ft
	16ft	14.9fc	7.1ft	17.6fc	7.1ft	22.3fc	7.1ft	26.5fc	7.1ft	29.7fc	7.1ft
	24ft	6.6fc	10.6ft	7.8fc	10.6ft	9.9fc	10.6ft	11.8fc	10.6ft	13.2fc	10.6ft
	32ft	3.7fc	14.2ft	4.4fc	14.2ft	5.6fc	14.2ft	6.6fc	14.2ft	7.4fc	14.2ft
	40ft	2.4fc	17.7ft	2.8fc	17.7ft	3.6fc	17.7ft	4.2fc	17.7ft	4.7fc	17.7ft
	48ft	1.7fc	21.3ft	2.0fc	21.3ft	2.5fc	21.3ft	2.9fc	21.3ft	3.3fc	21.3ft
	60ft	1.1fc	26.6ft	1.3fc	26.6ft	1.6fc	26.6ft	1.9fc	26.6ft	2.1fc	26.6ft


At 40° Setting	POWER	13W		16W		21W		26W		31W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	113.6fc	2.9ft	136.1fc	2.9ft	175.2fc	2.9ft	204.2fc	2.9ft	234.2fc	2.9ft
	8ft	28.4fc	5.8ft	34.0fc	5.8ft	43.8fc	5.8ft	51.0fc	5.8ft	58.5fc	5.8ft
	12ft	12.6fc	8.7ft	15.1fc	8.7ft	19.5fc	8.7ft	22.7fc	8.7ft	26.0fc	8.7ft
	16ft	7.1fc	11.6ft	8.5fc	11.6ft	10.9fc	11.6ft	12.8fc	11.6ft	14.6fc	11.6ft
	24ft	3.2fc	17.5ft	3.8fc	17.5ft	4.9fc	17.5ft	5.7fc	17.5ft	6.5fc	17.5ft
	32ft	1.8fc	23.3ft	2.1fc	23.3ft	2.7fc	23.3ft	3.2fc	23.3ft	3.7fc	23.3ft
	40ft	1.1fc	29.1ft	1.4fc	29.1ft	1.8fc	29.1ft	2.0fc	29.1ft	2.3fc	29.1ft
	48ft	0.8fc	34.9ft	0.9fc	34.9ft	1.2fc	34.9ft	1.4fc	34.9ft	1.6fc	34.9ft
	60ft	0.5fc	43.7ft	0.6fc	43.7ft	0.8fc	43.7ft	0.9fc	43.7ft	1.0fc	43.7ft

At 60° Setting	POWER	13W		16W		21W		26W		31W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
	4ft	53.5fc	4.6ft	64.2fc	4.6ft	81.9fc	4.6ft	97.1fc	4.6ft	110.1fc	4.6ft
	8ft	13.4fc	9.2ft	16.0fc	9.2ft	20.5fc	9.2ft	24.3fc	9.2ft	27.5fc	9.2ft
	12ft	5.9fc	13.9ft	7.1fc	13.9ft	9.1fc	13.9ft	10.8fc	13.9ft	12.2fc	13.9ft
	16ft	3.3fc	18.5ft	4.0fc	18.5ft	5.1fc	18.5ft	6.1fc	18.5ft	6.9fc	18.5ft
	24ft	1.5fc	27.7ft	1.8fc	27.7ft	2.3fc	27.7ft	2.7fc	27.7ft	3.1fc	27.7ft
	32ft	0.8fc	37.0ft	1.0fc	37.0ft	1.3fc	37.0ft	1.5fc	37.0ft	1.7fc	37.0ft
	40ft	0.5fc	46.2ft	0.6fc	46.2ft	0.8fc	46.2ft	1.0fc	46.2ft	1.1fc	46.2ft
	48ft	0.4fc	55.4ft	0.4fc	55.4ft	0.6fc	55.4ft	0.7fc	55.4ft	0.8fc	55.4ft
	60ft	0.2fc	69.3ft	0.3fc	69.3ft	0.4fc	69.3ft	0.4fc	69.3ft	0.5fc	69.3ft

LANDSCAPE


ACCENT 12V PHOTOMETRICS

At 10° Setting




POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	55.9fc	0.8ft	129.0fc	0.8ft	233.8fc	0.8ft	341.4fc	0.8ft	435.3fc	0.8ft
8ft	14.0fc	1.7ft	32.3fc	1.7ft	58.5fc	1.7ft	85.4fc	1.7ft	108.8fc	1.7ft
12ft	6.2fc	2.5ft	14.3fc	2.5ft	26.0fc	2.5ft	37.9fc	2.5ft	48.4fc	2.5ft
16ft	3.5fc	3.4ft	8.1fc	3.4ft	14.6fc	3.4ft	21.3fc	3.4ft	27.2fc	3.4ft
24ft	1.6fc	5.0ft	3.6fc	5.0ft	6.5fc	5.0ft	9.5fc	5.0ft	12.1fc	5.0ft
32ft	0.9fc	6.7ft	2.0fc	6.7ft	3.7fc	6.7ft	5.3fc	6.7ft	6.8fc	6.7ft
40ft	0.6fc	8.4ft	1.3fc	8.4ft	2.3fc	8.4ft	3.4fc	8.4ft	4.4fc	8.4ft
48ft	0.4fc	10.1ft	0.9fc	10.1ft	1.6fc	10.1ft	2.4fc	10.1ft	3.0fc	10.1ft
60ft	0.2fc	12.6ft	0.6fc	12.6ft	1.0fc	12.6ft	1.5fc	12.6ft	1.9fc	12.6ft

At 25° Setting




POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	25.2fc	1.8ft	54.8fc	1.8ft	105.8fc	1.8ft	153.0fc	1.8ft	194.6fc	1.8ft
8ft	6.3fc	3.5ft	13.7fc	3.5ft	26.5fc	3.5ft	38.3fc	3.5ft	48.7fc	3.5ft
12ft	2.8fc	5.3ft	6.1fc	5.3ft	11.8fc	5.3ft	17.0fc	5.3ft	21.6fc	5.3ft
16ft	1.6fc	7.1ft	3.4fc	7.1ft	6.6fc	7.1ft	9.6fc	7.1ft	12.2fc	7.1ft
24ft	0.7fc	10.6ft	1.5fc	10.6ft	2.9fc	10.6ft	4.3fc	10.6ft	5.4fc	10.6ft
32ft	0.4fc	14.2ft	0.9fc	14.2ft	1.7fc	14.2ft	2.4fc	14.2ft	3.0fc	14.2ft
40ft	0.3fc	17.7ft	0.5fc	17.7ft	1.1fc	17.7ft	1.5fc	17.7ft	1.9fc	17.7ft
48ft	0.2fc	21.3ft	0.4fc	21.3ft	0.7fc	21.3ft	1.1fc	21.3ft	1.4fc	21.3ft
60ft	0.1fc	26.6ft	0.2fc	26.6ft	0.5fc	26.6ft	0.7fc	26.6ft	0.9fc	26.6ft

At 40° Setting



POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	14.5fc	3.0ft	33.2fc	3.0ft	60.2fc	3.0ft	88.6fc	3.0ft	113.9fc	3.0ft
8ft	3.6fc	6.1ft	8.3fc	6.1ft	15.0fc	6.1ft	22.1fc	6.1ft	28.5fc	6.1ft
12ft	1.6fc	9.1ft	3.7fc	9.1ft	6.7fc	9.1ft	9.8fc	9.1ft	12.7fc	9.1ft
16ft	0.9fc	12.2ft	2.1fc	12.2ft	3.8fc	12.2ft	5.5fc	12.2ft	7.1fc	12.2ft
24ft	0.4fc	18.2ft	0.9fc	18.2ft	1.7fc	18.2ft	2.5fc	18.2ft	3.2fc	18.2ft
32ft	0.2fc	24.3ft	0.5fc	24.3ft	0.9fc	24.3ft	1.4fc	24.3ft	1.8fc	24.3ft
40ft	0.1fc	30.4ft	0.3fc	30.4ft	0.6fc	30.4ft	0.9fc	30.4ft	1.1fc	30.4ft
48ft	0.1fc	36.5ft	0.2fc	36.5ft	0.4fc	36.5ft	0.6fc	36.5ft	0.8fc	36.5ft
60ft	0.1fc	45.6ft	0.1fc	45.6ft	0.3fc	45.6ft	0.4fc	45.6ft	0.5fc	45.6ft

At 60° Setting




POWER	1W		2W		8W		15W		18W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	9.0fc	4.5ft	16.6fc	4.5ft	41.2fc	4.5ft	54.0fc	4.5ft	70.1fc	4.5ft
8ft	2.3fc	8.9ft	4.1fc	8.9ft	10.3fc	8.9ft	13.5fc	8.9ft	17.5fc	8.9ft
12ft	1.0fc	13.4ft	1.8fc	13.4ft	4.6fc	13.4ft	6.0fc	13.4ft	7.8fc	13.4ft
16ft	0.6fc	17.9ft	1.0fc	17.9ft	2.6fc	17.9ft	3.4fc	17.9ft	4.4fc	17.9ft
24ft	0.3fc	26.8ft	0.5fc	26.8ft	1.1fc	26.8ft	1.5fc	26.8ft	1.9fc	26.8ft
32ft	0.1fc	35.8ft	0.3fc	35.8ft	0.6fc	35.8ft	0.8fc	35.8ft	1.1fc	35.8ft
40ft	0.1fc	44.7ft	0.2fc	44.7ft	0.4fc	44.7ft	0.5fc	44.7ft	0.7fc	44.7ft
48ft	0.1fc	53.7ft	0.1fc	53.7ft	0.3fc	53.7ft	0.4fc	53.7ft	0.5fc	53.7ft
60ft	0.0fc	67.1ft	0.1fc	67.1ft	0.2fc	67.1ft	0.2fc	67.1ft	0.3fc	67.1ft

LANDSCAPE


ACCENT 120V PHOTOMETRICS

At 15° Setting




POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	50.4fc	1.1ft	102.4fc	1.1ft	151.8fc	1.1ft	192.9fc	1.1ft	200.3fc	1.1ft
8ft	12.6fc	2.1ft	25.6fc	2.1ft	37.9fc	2.1ft	48.2fc	2.1ft	50.1fc	2.1ft
12ft	5.6fc	3.2ft	11.4fc	3.2ft	16.9fc	3.2ft	21.4fc	3.2ft	22.3fc	3.2ft
16ft	3.1fc	4.2ft	6.4fc	4.2ft	9.5fc	4.2ft	12.1fc	4.2ft	12.5fc	4.2ft
24ft	1.4fc	6.3ft	2.8fc	6.3ft	4.2fc	6.3ft	5.4fc	6.3ft	5.6fc	6.3ft
32ft	0.8fc	8.4ft	1.6fc	8.4ft	2.4fc	8.4ft	3.0fc	8.4ft	3.1fc	8.4ft
40ft	0.5fc	10.5ft	1.0fc	10.5ft	1.5fc	10.5ft	1.9fc	10.5ft	2.0fc	10.5ft
48ft	0.3fc	12.6ft	0.7fc	12.6ft	1.1fc	12.6ft	1.3fc	12.6ft	1.4fc	12.6ft
60ft	0.2fc	15.8ft	0.5fc	15.8ft	0.7fc	15.8ft	0.9fc	15.8ft	0.9fc	15.8ft

At 25° Setting




POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	37.2fc	1.8ft	73.1fc	1.8ft	113.1fc	1.8ft	139.2fc	1.8ft	149.1fc	1.8ft
8ft	9.3fc	3.5ft	18.3fc	3.5ft	28.3fc	3.5ft	34.8fc	3.5ft	37.3fc	3.5ft
12ft	4.1fc	5.3ft	8.1fc	5.3ft	12.6fc	5.3ft	15.5fc	5.3ft	16.6fc	5.3ft
16ft	2.3fc	7.1ft	4.6fc	7.1ft	7.1fc	7.1ft	8.7fc	7.1ft	9.3fc	7.1ft
24ft	1.0fc	10.6ft	2.0fc	10.6ft	3.1fc	10.6ft	3.9fc	10.6ft	4.1fc	10.6ft
32ft	0.6fc	14.2ft	1.1fc	14.2ft	1.8fc	14.2ft	2.2fc	14.2ft	2.3fc	14.2ft
40ft	0.4fc	17.7ft	0.7fc	17.7ft	1.1fc	17.7ft	1.4fc	17.7ft	1.5fc	17.7ft
48ft	0.3fc	21.3ft	0.5fc	21.3ft	0.8fc	21.3ft	1.0fc	21.3ft	1.0fc	21.3ft
60ft	0.2fc	26.6ft	0.3fc	26.6ft	0.5fc	26.6ft	0.6fc	26.6ft	0.7fc	26.6ft

At 40° Setting



POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	20.7fc	3.0ft	36.7fc	3.0ft	63.4fc	3.0ft	81.9fc	3.0ft	85.9fc	3.0ft
8ft	5.2fc	6.1ft	9.2fc	6.1ft	15.8fc	6.1ft	20.5fc	6.1ft	21.5fc	6.1ft
12ft	2.3fc	9.1ft	4.1fc	9.1ft	7.0fc	9.1ft	9.1fc	9.1ft	9.5fc	9.1ft
16ft	1.3fc	12.2ft	2.3fc	12.2ft	4.0fc	12.2ft	5.1fc	12.2ft	5.4fc	12.2ft
24ft	0.6fc	18.2ft	1.0fc	18.2ft	1.8fc	18.2ft	2.3fc	18.2ft	2.4fc	18.2ft
32ft	0.3fc	24.3ft	0.6fc	24.3ft	1.0fc	24.3ft	1.3fc	24.3ft	1.3fc	24.3ft
40ft	0.2fc	30.4ft	0.4fc	30.4ft	0.6fc	30.4ft	0.8fc	30.4ft	0.9fc	30.4ft
48ft	0.1fc	36.5ft	0.3fc	36.5ft	0.4fc	36.5ft	0.6fc	36.5ft	0.6fc	36.5ft
60ft	0.1fc	45.6ft	0.2fc	45.6ft	0.3fc	45.6ft	0.4fc	45.6ft	0.4fc	45.6ft

At 60° Setting




POWER	3.5W		6.5W		10.5W		13.5W		14.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	13.2fc	4.5ft	24.5fc	4.5ft	33.1fc	4.5ft	46.6fc	4.5ft	53.6fc	4.5ft
8ft	3.3fc	8.9ft	6.1fc	8.9ft	8.3fc	8.9ft	11.7fc	8.9ft	13.4fc	8.9ft
12ft	1.5fc	13.4ft	2.7fc	13.4ft	3.7fc	13.4ft	5.2fc	13.4ft	6.0fc	13.4ft
16ft	0.8fc	17.9ft	1.5fc	17.9ft	2.1fc	17.9ft	2.9fc	17.9ft	3.4fc	17.9ft
24ft	0.4fc	26.8ft	0.7fc	26.8ft	0.9fc	26.8ft	1.3fc	26.8ft	1.5fc	26.8ft
32ft	0.2fc	35.8ft	0.4fc	35.8ft	0.5fc	35.8ft	0.7fc	35.8ft	0.8fc	35.8ft
40ft	0.1fc	44.7ft	0.2fc	44.7ft	0.3fc	44.7ft	0.5fc	44.7ft	0.5fc	44.7ft
48ft	0.1fc	53.7ft	0.2fc	53.7ft	0.2fc	53.7ft	0.3fc	53.7ft	0.4fc	53.7ft
60ft	0.1fc	67.1ft	0.1fc	67.1ft	0.1fc	67.1ft	0.2fc	67.1ft	0.2fc	67.1ft

LANDSCAPE


MINI ACCENT 12V PHOTOMETRICS

At 10° Setting




POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	83.1fc	0.6ft	122.8fc	0.6ft	181.0fc	0.6ft	244.1fc	0.6ft	274.9fc	0.6ft
8ft	20.8fc	1.2ft	30.7fc	1.2ft	45.3fc	1.2ft	61.0fc	1.2ft	68.7fc	1.2ft
12ft	9.2fc	1.8ft	13.6fc	1.8ft	20.1fc	1.8ft	27.1fc	1.8ft	30.5fc	1.8ft
16ft	5.2fc	2.3ft	7.7fc	2.3ft	11.3fc	2.3ft	15.3fc	2.3ft	17.2fc	2.3ft
24ft	2.3fc	3.5ft	3.4fc	3.5ft	5.0fc	3.5ft	6.8fc	3.5ft	7.6fc	3.5ft
32ft	1.3fc	4.7ft	1.9fc	4.7ft	2.8fc	4.7ft	3.8fc	4.7ft	4.3fc	4.7ft
40ft	0.8fc	5.9ft	1.2fc	5.9ft	1.8fc	5.9ft	2.4fc	5.9ft	2.7fc	5.9ft
48ft	0.6fc	7.0ft	0.9fc	7.0ft	1.3fc	7.0ft	1.7fc	7.0ft	1.9fc	7.0ft
60ft	0.4fc	8.8ft	0.5fc	8.8ft	0.8fc	8.8ft	1.1fc	8.8ft	1.2fc	8.8ft

At 25° Setting




POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	22.8fc	1.9ft	36.0fc	1.9ft	52.7fc	1.9ft	71.1fc	1.9ft	76.8fc	1.9ft
8ft	5.7fc	3.7ft	9.0fc	3.7ft	13.2fc	3.7ft	17.8fc	3.7ft	19.2fc	3.7ft
12ft	2.5fc	5.6ft	4.0fc	5.6ft	5.9fc	5.6ft	7.9fc	5.6ft	8.5fc	5.6ft
16ft	1.4fc	7.4ft	2.2fc	7.4ft	3.3fc	7.4ft	4.4fc	7.4ft	4.8fc	7.4ft
24ft	0.6fc	11.1ft	1.0fc	11.1ft	1.5fc	11.1ft	2.0fc	11.1ft	2.1fc	11.1ft
32ft	0.4fc	14.8ft	0.6fc	14.8ft	0.8fc	14.8ft	1.1fc	14.8ft	1.2fc	14.8ft
40ft	0.2fc	18.5ft	0.4fc	18.5ft	0.5fc	18.5ft	0.7fc	18.5ft	0.8fc	18.5ft
48ft	0.2fc	22.3ft	0.2fc	22.3ft	0.4fc	22.3ft	0.5fc	22.3ft	0.5fc	22.3ft
60ft	0.1fc	27.8ft	0.2fc	27.8ft	0.2fc	27.8ft	0.3fc	27.8ft	0.3fc	27.8ft

At 40° Setting



POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	13.0fc	3.1ft	20.7fc	3.1ft	27.7fc	3.1ft	39.6fc	3.1ft	42.0fc	3.1ft
8ft	3.3fc	6.1ft	5.2fc	6.1ft	6.9fc	6.1ft	9.9fc	6.1ft	10.5fc	6.1ft
12ft	1.4fc	9.2ft	2.3fc	9.2ft	3.1fc	9.2ft	4.4fc	9.2ft	4.7fc	9.2ft
16ft	0.8fc	12.3ft	1.3fc	12.3ft	1.7fc	12.3ft	2.5fc	12.3ft	2.6fc	12.3ft
24ft	0.4fc	18.4ft	0.6fc	18.4ft	0.8fc	18.4ft	1.1fc	18.4ft	1.2fc	18.4ft
32ft	0.2fc	24.5ft	0.3fc	24.5ft	0.4fc	24.5ft	0.6fc	24.5ft	0.7fc	24.5ft
40ft	0.1fc	30.6ft	0.2fc	30.6ft	0.3fc	30.6ft	0.4fc	30.6ft	0.4fc	30.6ft
48ft	0.1fc	36.8ft	0.1fc	36.8ft	0.2fc	36.8ft	0.3fc	36.8ft	0.3fc	36.8ft
60ft	0.1fc	45.9ft	0.1fc	45.9ft	0.1fc	45.9ft	0.2fc	45.9ft	0.2fc	45.9ft

At 50° Setting




POWER	1W		2W		4W		6W		7W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	9.0fc	3.9ft	12.3fc	3.9ft	16.9fc	3.9ft	25.0fc	3.9ft	29.8fc	3.9ft
8ft	2.3fc	7.7ft	3.1fc	7.7ft	4.2fc	7.7ft	6.2fc	7.7ft	7.4fc	7.7ft
12ft	1.0fc	11.6ft	1.4fc	11.6ft	1.9fc	11.6ft	2.8fc	11.6ft	3.3fc	11.6ft
16ft	0.6fc	15.5ft	0.8fc	15.5ft	1.1fc	15.5ft	1.6fc	15.5ft	1.9fc	15.5ft
24ft	0.3fc	23.2ft	0.3fc	23.2ft	0.5fc	23.2ft	0.7fc	23.2ft	0.8fc	23.2ft
32ft	0.1fc	30.9ft	0.2fc	30.9ft	0.3fc	30.9ft	0.4fc	30.9ft	0.5fc	30.9ft
40ft	0.1fc	38.7ft	0.1fc	38.7ft	0.2fc	38.7ft	0.2fc	38.7ft	0.3fc	38.7ft
48ft	0.1fc	46.4ft	0.1fc	46.4ft	0.1fc	46.4ft	0.2fc	46.4ft	0.2fc	46.4ft
60ft	0.0fc	58.0ft	0.1fc	58.0ft	0.1fc	58.0ft	0.1fc	58.0ft	0.1fc	58.0ft


LANDSCAPE


INTERBEAM 12V PHOTOMETRICS


5311


At 20° Setting	POWER	6W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH
	4ft	107.3fc	1.5ft
	8ft	26.8fc	3.0ft
	12ft	11.9fc	4.0ft
	16ft	6.7fc	5.5ft
	24ft	3.0fc	8.5ft
	32ft	1.7fc	11.5ft
	40ft	1.1fc	14.0ft
	48ft	0.7fc	17.0ft
	60ft	0.5fc	20.0ft


5411

At 20° Setting	POWER	3W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH
	4ft	51.3fc	1.5ft
	8ft	12.8fc	3.0ft
	12ft	5.7fc	4.0ft
	16ft	3.2fc	5.5ft
	24ft	1.4fc	8.5ft
	32ft	0.8fc	11.5ft
	40ft	0.5fc	14.0ft
	48ft	0.4fc	17.0ft
	60ft	0.2fc	21.0ft

At 35° Setting	POWER	6W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH
	4ft	61.9fc	2.5ft
	8ft	15.5fc	5.0ft
	12ft	2.7fc	6.4ft
	16ft	6.9fc	7.5ft
	24ft	3.9fc	10.0ft
	32ft	1.7fc	15.0ft
	40ft	1.0fc	20.0ft
	48ft	0.4fc	30.5ft
	60ft	0.3fc	38.0ft

At 35° Setting	POWER	3W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH
	4ft	32.3fc	2.5ft
	8ft	8.1fc	5.0ft
	12ft	3.6fc	7.5ft
	16ft	2.0fc	10.0ft
	24ft	0.9fc	15.0ft
	32ft	0.5fc	20.0ft
	40ft	0.3fc	25.0ft
	48ft	0.2fc	30.5ft
	60ft	0.1fc	38.0ft


At 60° Setting	POWER	6W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH
	4ft	34.4fc	4.5ft
	8ft	8.6fc	9.0ft
	12ft	3.8fc	14.0ft
	16ft	2.2fc	18.5ft
	24ft	1.0fc	27.5ft
	32ft	0.5fc	37.0ft
	40ft	0.3fc	46.0ft
	48ft	0.2fc	55.5ft
	60ft	0.2fc	69.5ft

At 60° Setting	POWER	3W	
	DISTANCE	FOOT CANDLES	BEAM WIDTH
	4ft	15.4fc	4.5ft
	8ft	3.8fc	9.0ft
	12ft	1.7fc	14.0ft
	16ft	1.0fc	18.5ft
	24ft	0.4fc	27.5ft
	32ft	0.2fc	37.0ft
	40ft	0.2fc	46.0ft
	48ft	0.1fc	55.5ft
	60ft	0.1fc	69.5ft

LANDSCAPE


3" INGROUND 12V PHOTOMETRICS

At 15° Setting




POWER	1W		2W		7W		13W		14W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	47.2fc	1.1ft	75.8fc	1.1ft	165.3fc	1.1ft	236.2fc	1.1ft	283.4fc	1.1ft
8ft	11.8fc	2.1ft	18.9fc	2.1ft	41.3fc	2.1ft	59.0fc	2.1ft	70.9fc	2.1ft
12ft	5.2fc	3.2ft	8.4fc	3.2ft	18.4fc	3.2ft	26.2fc	3.2ft	31.5fc	3.2ft
16ft	3.0fc	4.2ft	4.7fc	4.2ft	10.3fc	4.2ft	14.8fc	4.2ft	17.7fc	4.2ft
24ft	1.3fc	6.3ft	2.1fc	6.3ft	4.6fc	6.3ft	6.6fc	6.3ft	7.9fc	6.3ft
32ft	0.7fc	8.4ft	1.2fc	8.4ft	2.6fc	8.4ft	3.7fc	8.4ft	4.4fc	8.4ft
40ft	0.5fc	10.5ft	0.8fc	10.5ft	1.7fc	10.5ft	2.4fc	10.5ft	2.8fc	10.5ft
48ft	0.3fc	12.6ft	0.5fc	12.6ft	1.1fc	12.6ft	1.6fc	12.6ft	2.0fc	12.6ft
60ft	0.2fc	15.8ft	0.3fc	15.8ft	0.7fc	15.8ft	1.0fc	15.8ft	1.3fc	15.8ft

At 30° Setting




POWER	1W		2W		7W		13W		14W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	19.4fc	2.1ft	38.8fc	2.1ft	68.0fc	2.1ft	97.1fc	2.1ft	116.6fc	2.1ft
8ft	4.9fc	4.3ft	9.7fc	4.3ft	17.0fc	4.3ft	24.3fc	4.3ft	29.1fc	4.3ft
12ft	2.2fc	6.4ft	4.3fc	6.4ft	7.6fc	6.4ft	10.8fc	6.4ft	13.0fc	6.4ft
16ft	1.2fc	8.6ft	2.4fc	8.6ft	4.3fc	8.6ft	6.1fc	8.6ft	7.3fc	8.6ft
24ft	0.5fc	12.9ft	1.1fc	12.9ft	1.9fc	12.9ft	2.7fc	12.9ft	3.2fc	12.9ft
32ft	0.3fc	17.1ft	0.6fc	17.1ft	1.1fc	17.1ft	1.5fc	17.1ft	1.8fc	17.1ft
40ft	0.2fc	21.4ft	0.4fc	21.4ft	0.7fc	21.4ft	1.0fc	21.4ft	1.2fc	21.4ft
48ft	0.1fc	25.7ft	0.3fc	25.7ft	0.5fc	25.7ft	0.7fc	25.7ft	0.8fc	25.7ft
60ft	0.1fc	32.2ft	0.2fc	32.2ft	0.3fc	32.2ft	0.4fc	32.2ft	0.5fc	32.2ft

At 45° Setting



POWER	1W		2W		7W		13W		14W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	10.9fc	3.3ft	21.8fc	3.3ft	38.1fc	3.3ft	54.4fc	3.3ft	65.3fc	3.3ft
8ft	2.7fc	6.6ft	5.4fc	6.6ft	9.5fc	6.6ft	13.6fc	6.6ft	16.3fc	6.6ft
12ft	1.2fc	9.9ft	2.4fc	9.9ft	4.2fc	9.9ft	6.0fc	9.9ft	7.3fc	9.9ft
16ft	0.7fc	13.3ft	1.4fc	13.3ft	2.4fc	13.3ft	3.4fc	13.3ft	4.1fc	13.3ft
24ft	0.3fc	19.9ft	0.6fc	19.9ft	1.1fc	19.9ft	1.5fc	19.9ft	1.8fc	19.9ft
32ft	0.2fc	26.5ft	0.3fc	26.5ft	0.6fc	26.5ft	0.9fc	26.5ft	1.0fc	26.5ft
40ft	0.1fc	33.1ft	0.2fc	33.1ft	0.4fc	33.1ft	0.5fc	33.1ft	0.7fc	33.1ft
48ft	0.1fc	39.8ft	0.2fc	39.8ft	0.3fc	39.8ft	0.4fc	39.8ft	0.5fc	39.8ft
60ft	0.0fc	49.7ft	0.1fc	49.7ft	0.2fc	49.7ft	0.2fc	49.7ft	0.3fc	49.7ft

At 60° Setting




POWER	1W		2W		7W		13W		14W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	7.3fc	4.6ft	14.5fc	4.6ft	25.4fc	4.6ft	36.3fc	4.6ft	43.6fc	4.6ft
8ft	1.8fc	9.2ft	3.6fc	9.2ft	6.4fc	9.2ft	9.1fc	9.2ft	10.9fc	9.2ft
12ft	0.8fc	13.9ft	1.6fc	13.9ft	2.8fc	13.9ft	4.0fc	13.9ft	4.8fc	13.9ft
16ft	0.5fc	18.5ft	0.9fc	18.5ft	1.6fc	18.5ft	2.3fc	18.5ft	2.7fc	18.5ft
24ft	0.2fc	27.7ft	0.4fc	27.7ft	0.7fc	27.7ft	1.0fc	27.7ft	1.2fc	27.7ft
32ft	0.1fc	37.0ft	0.2fc	37.0ft	0.4fc	37.0ft	0.6fc	37.0ft	0.7fc	37.0ft
40ft	0.1fc	46.2ft	0.1fc	46.2ft	0.3fc	46.2ft	0.4fc	46.2ft	0.4fc	46.2ft
48ft	0.1fc	55.4ft	0.1fc	55.4ft	0.2fc	55.4ft	0.3fc	55.4ft	0.3fc	55.4ft
60ft	0.0fc	69.3ft	0.1fc	69.3ft	0.1fc	69.3ft	0.2fc	69.3ft	0.2fc	69.3ft

LANDSCAPE


3" INGROUND 120V PHOTOMETRICS

At 15° Setting




POWER	3W		5.5W		8.5W		10.5W		11.5W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	44.4fc	1.1ft	81.1fc	1.1ft	125.4fc	1.1ft	154.9fc	1.1ft	169.6fc	1.1ft
8ft	11.1fc	2.1ft	20.3fc	2.1ft	31.3fc	2.1ft	38.7fc	2.1ft	42.4fc	2.1ft
12ft	4.9fc	3.2ft	9.0fc	3.2ft	13.9fc	3.2ft	17.2fc	3.2ft	18.8fc	3.2ft
16ft	2.8fc	4.2ft	5.1fc	4.2ft	7.8fc	4.2ft	9.7fc	4.2ft	10.6fc	4.2ft
24ft	1.2fc	6.3ft	2.3fc	6.3ft	3.5fc	6.3ft	4.3fc	6.3ft	4.7fc	6.3ft
32ft	0.7fc	8.4ft	1.3fc	8.4ft	2.0fc	8.4ft	2.4fc	8.4ft	2.7fc	8.4ft
40ft	0.4fc	10.5ft	0.8fc	10.5ft	1.3fc	10.5ft	1.5fc	10.5ft	1.7fc	10.5ft
48ft	0.3fc	12.6ft	0.6fc	12.6ft	0.9fc	12.6ft	1.1fc	12.6ft	1.2fc	12.6ft
60ft	0.2fc	15.8ft	0.4fc	15.8ft	0.6fc	15.8ft	0.7fc	15.8ft	0.8fc	15.8ft

At 30° Setting




POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	24.5fc	2.1ft	45.1fc	2.1ft	69.6fc	2.1ft	86.0fc	2.1ft	94.2fc	2.1ft
8ft	6.1fc	4.3ft	11.3fc	4.3ft	17.4fc	4.3ft	21.5fc	4.3ft	23.5fc	4.3ft
12ft	2.7fc	6.4ft	5.0fc	6.4ft	7.7fc	6.4ft	9.6fc	6.4ft	10.5fc	6.4ft
16ft	1.5fc	8.6ft	2.8fc	8.6ft	4.4fc	8.6ft	5.4fc	8.6ft	5.9fc	8.6ft
24ft	0.7fc	12.9ft	1.3fc	12.9ft	1.9fc	12.9ft	2.4fc	12.9ft	2.6fc	12.9ft
32ft	0.4fc	17.1ft	0.7fc	17.1ft	1.1fc	17.1ft	1.3fc	17.1ft	1.5fc	17.1ft
40ft	0.2fc	21.4ft	0.5fc	21.4ft	0.7fc	21.4ft	0.9fc	21.4ft	0.9fc	21.4ft
48ft	0.2fc	25.7ft	0.3fc	25.7ft	0.5fc	25.7ft	0.6fc	25.7ft	0.7fc	25.7ft
60ft	0.1fc	32.2ft	0.2fc	32.2ft	0.3fc	32.2ft	0.4fc	32.2ft	0.4fc	32.2ft

At 45° Setting



POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	16.2fc	3.3ft	29.9fc	3.3ft	46.2fc	3.3ft	57.0fc	3.3ft	62.5fc	3.3ft
8ft	4.1fc	6.6ft	7.5fc	6.6ft	11.5fc	6.6ft	14.3fc	6.6ft	15.6fc	6.6ft
12ft	1.8fc	9.9ft	3.3fc	9.9ft	5.1fc	9.9ft	6.3fc	9.9ft	6.9fc	9.9ft
16ft	1.0fc	13.3ft	1.9fc	13.3ft	2.9fc	13.3ft	3.6fc	13.3ft	3.9fc	13.3ft
24ft	0.5fc	19.9ft	0.8fc	19.9ft	1.3fc	19.9ft	1.6fc	19.9ft	1.7fc	19.9ft
32ft	0.3fc	26.5ft	0.5fc	26.5ft	0.7fc	26.5ft	0.9fc	26.5ft	1.0fc	26.5ft
40ft	0.2fc	33.1ft	0.3fc	33.1ft	0.5fc	33.1ft	0.6fc	33.1ft	0.6fc	33.1ft
48ft	0.1fc	39.8ft	0.2fc	39.8ft	0.3fc	39.8ft	0.4fc	39.8ft	0.4fc	39.8ft
60ft	0.1fc	49.7ft	0.1fc	49.7ft	0.2fc	49.7ft	0.3fc	49.7ft	0.3fc	49.7ft

At 60° Setting



POWER	15W		22W		26W		30W		33W	
DISTANCE	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH	FOOT CANDLES	BEAM WIDTH
4ft	10.6fc	4.6ft	19.5fc	4.6ft	30.1fc	4.6ft	37.1fc	4.6ft	40.7fc	4.6ft
8ft	2.6fc	9.2ft	4.9fc	9.2ft	7.5fc	9.2ft	9.3fc	9.2ft	10.2fc	9.2ft
12ft	1.2fc	13.9ft	2.2fc	13.9ft	3.3fc	13.9ft	4.1fc	13.9ft	4.5fc	13.9ft
16ft	0.7fc	18.5ft	1.2fc	18.5ft	1.9fc	18.5ft	2.3fc	18.5ft	2.5fc	18.5ft
24ft	0.3fc	27.7ft	0.5fc	27.7ft	0.8fc	27.7ft	1.0fc	27.7ft	1.1fc	27.7ft
32ft	0.2fc	37.0ft	0.3fc	37.0ft	0.5fc	37.0ft	0.6fc	37.0ft	0.6fc	37.0ft
40ft	0.1fc	46.2ft	0.2fc	46.2ft	0.3fc	46.2ft	0.4fc	46.2ft	0.4fc	46.2ft
48ft	0.1fc	55.4ft	0.1fc	55.4ft	0.2fc	55.4ft	0.3fc	55.4ft	0.3fc	55.4ft
60ft	0.0fc	69.3ft	0.1fc	69.3ft	0.1fc	69.3ft	0.2fc	69.3ft	0.2fc	69.3ft

LANDSCAPE

HARDSCAPE PHOTOMETRICS

7032

Mounting Height	Distance from Fixture				
	0	1'	2'	3'	4'
12"	12.73fc	2.88fc	0.42fc	0.09fc	0.03fc
24"	3.16fc	1.95fc	0.73fc	0.26fc	0.10fc
36"	1.39fc	1.11fc	0.65fc	0.33fc	0.16fc

7062

Mounting Height	Distance from Fixture				
	0	1'	2'	3'	4'
12"	36.23fc	8.55fc	1.21fc	0.28fc	0.09fc
24"	9.29fc	5.76fc	2.14fc	0.75fc	0.30fc
36"	4.18fc	3.34fc	1.86fc	0.93fc	0.47fc

7122

Mounting Height	Distance from Fixture				
	0	1'	2'	3'	4'
12"	64.85fc	15.61fc	2.42fc	0.57fc	0.19fc
24"	16.35fc	10.31fc	3.90fc	1.49fc	0.61fc
36"	7.25fc	5.85fc	3.44fc	1.77fc	0.91fc

7182

Mounting Height	Distance from Fixture				
	0	1'	2'	3'	4'
12"	90.67fc	22.67fc	3.34fc	0.76fc	0.24fc
24"	23.13fc	14.68fc	5.57fc	2.04fc	0.82fc
36"	10.31fc	8.36fc	4.83fc	2.42fc	1.21fc

DECK & PATIO PHOTOMETRICS

3011

Mounting Height	Distance from Fixture						
	0	0.5'	1'	2'	3'	4'	5'
6"	6.79fc	82fc	2.65fc	0.15fc	0.03fc	0.01fc	0.01fc
12"	15fc	39fc	9.9fc	0.42fc	0.09fc	0.03fc	0.02fc
30"	5.79fc	7.21fc	6.35fc	2.17fc	0.43fc	0.14fc	0.06fc

3021

Mounting Height	Distance from Fixture						
	0	0.5'	1'	2'	3'	4'	5'
6"	16fc	74fc	0.92fc	0.04fc	0.01fc	-	-
12"	21fc	38fc	7.29fc	0.18fc	0.03fc	0.01fc	-
30"	5.86fc	7.2fc	5.97fc	1.85fc	0.24fc	0.07fc	0.03fc


3031

Mounting Height	Distance from Fixture						
	0	0.5'	1'	2'	3'	4'	5'
6"	15fc	117fc	1.6fc	0.11fc	0.03fc	0.01fc	0.01fc
12"	15fc	43fc	19fc	0.26fc	0.07fc	0.03fc	0.01fc
30"	5.1fc	7.22fc	7fc	3.95fc	0.49fc	0.09fc	0.04fc


LANDSCAPE

WALL WASH PHOTOMETRICS


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5021-30	3ft	27.5fc	16.3fc	10.9fc	4.7fc	0.72fc	0.33fc
	4ft	15.6fc	9.6fc	5.9fc	2.7fc	0.40fc	0.18fc
	5ft	10fc	5.9fc	4.0fc	1.3fc	0.26fc	0.12fc
	6ft	6.8fc	4.1fc	2.7fc	1.2fc	0.18fc	0.08fc
	7ft	5fc	3.1fc	2.0fc	0.88fc	0.13fc	0.06fc
	8ft	3.9fc	2.4fc	1.6fc	0.67fc	0.10fc	0.05fc
	9ft	3.1fc	1.8fc	1.2fc	0.54fc	0.08fc	0.04fc
	10ft	2.5fc	1.5fc	0.99fc	0.44fc	0.06fc	0.03fc

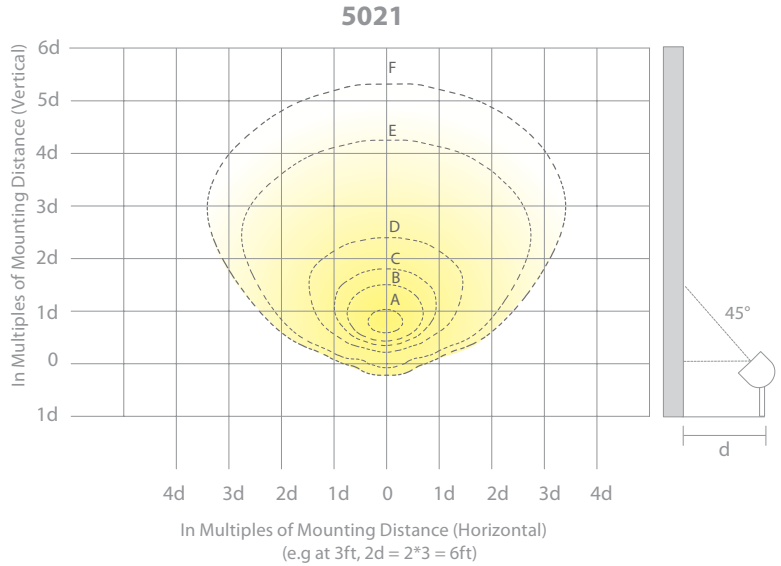

FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5022-30	3ft	27.5fc	16.3fc	10.9fc	4.7fc	0.72fc	0.33fc
	4ft	15.6fc	9.6fc	5.9fc	2.7fc	0.40fc	0.18fc
	5ft	10fc	5.9fc	4.0fc	1.3fc	0.26fc	0.12fc
	6ft	6.8fc	4.1fc	2.7fc	1.2fc	0.18fc	0.08fc
	7ft	5fc	3.1fc	2.0fc	0.88fc	0.13fc	0.06fc
	8ft	3.9fc	2.4fc	1.6fc	0.67fc	0.10fc	0.05fc
	9ft	3.1fc	1.8fc	1.2fc	0.54fc	0.08fc	0.04fc
	10ft	2.5fc	1.5fc	0.99fc	0.44fc	0.06fc	0.03fc

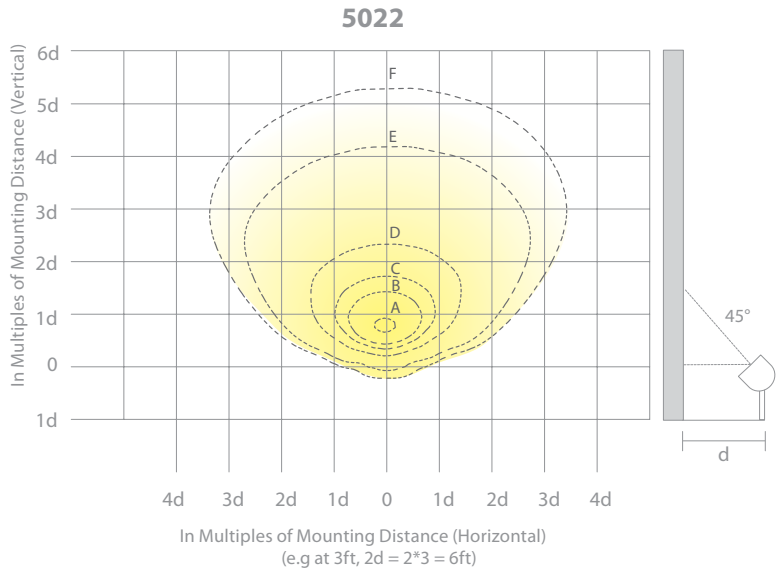


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5121-30	3ft	27.5fc	16.3fc	10.9fc	4.7fc	0.72fc	0.33fc
	4ft	15.6fc	9.6fc	5.9fc	2.7fc	0.40fc	0.18fc
	5ft	10fc	5.9fc	4.0fc	1.3fc	0.26fc	0.12fc
	6ft	6.8fc	4.1fc	2.7fc	1.2fc	0.18fc	0.08fc
	7ft	5fc	3.1fc	2.0fc	0.88fc	0.13fc	0.06fc
	8ft	3.9fc	2.4fc	1.6fc	0.67fc	0.10fc	0.05fc
	9ft	3.1fc	1.8fc	1.2fc	0.54fc	0.08fc	0.04fc
	10ft	2.5fc	1.5fc	0.99fc	0.44fc	0.06fc	0.03fc

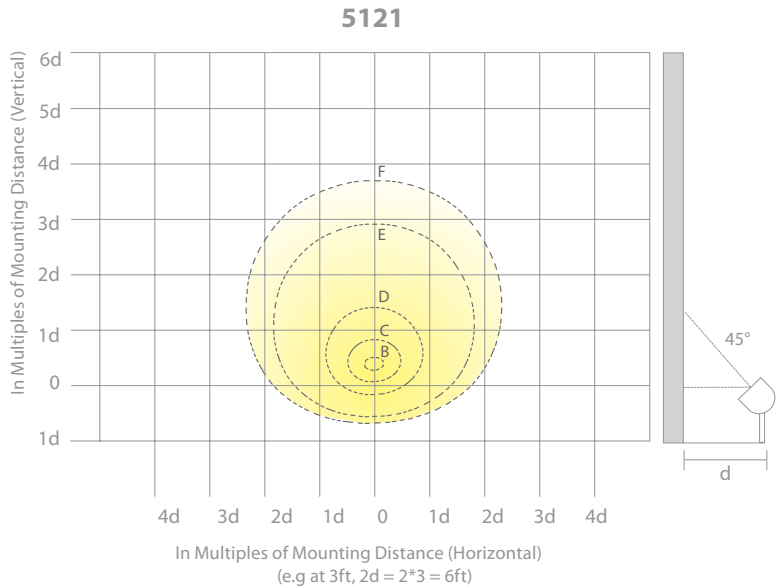


LANDSCAPE

ADJUSTABLE BEAM WALL WASH PHOTOMETRICS


FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5221/5222 (4X3)	3ft	27.9fc	11.3fc	5.6fc	1.5fc	0.05fc	0.02fc
	4ft	15.7fc	6.3fc	3.2fc	0.85fc	0.03fc	0.01fc
	5ft	10.1fc	4.1fc	2fc	0.53fc	0.02fc	0.01fc
	6ft	7fc	2.8fc	1.4fc	0.37fc	0.01fc	-
	7ft	5.1fc	2.1fc	1fc	0.28fc	0.01fc	-
	8ft	4fc	1.6fc	0.79fc	0.21fc	0.01fc	-
	9ft	3.1fc	1.3fc	0.62fc	0.17fc	0.01fc	-
	10ft	2.5fc	1.0fc	0.51fc	0.14fc	-	-

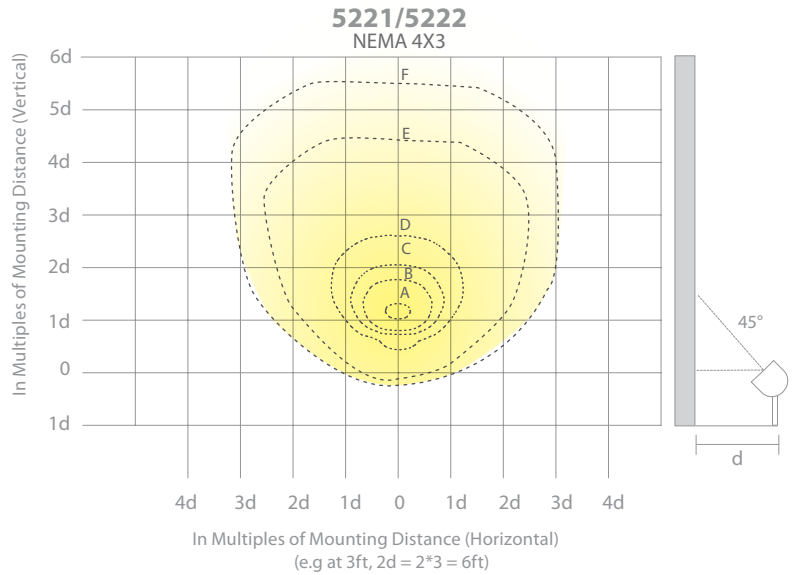

FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5221/5222 (5X4)	3ft	28.9fc	13.4fc	7.9fc	3fc	0.36fc	0.14fc
	4ft	16.3fc	7.5fc	4.4fc	1.7fc	0.20fc	0.08fc
	5ft	10.4fc	4.8fc	2.8fc	1.1fc	0.13fc	0.05fc
	6ft	7.3fc	3.4fc	2.0fc	0.75fc	0.09fc	0.04fc
	7ft	5.3fc	2.5fc	1.5fc	0.55fc	0.07fc	0.03fc
	8ft	4.1fc	1.9fc	1.1fc	0.42fc	0.05fc	0.02fc
	9ft	3.2fc	1.5fc	0.87fc	0.33fc	0.04fc	0.02fc
	10ft	2.6fc	1.2fc	0.71fc	0.27fc	0.03fc	0.01fc

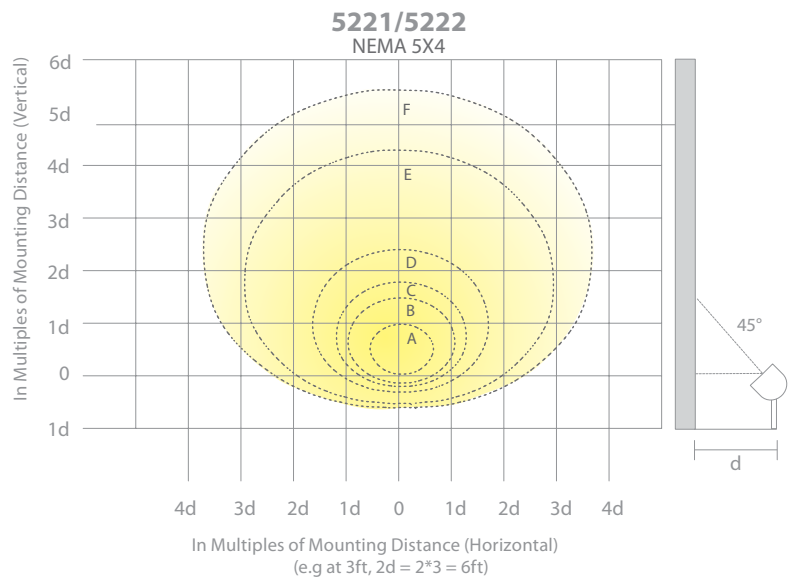

FIXTURE	MOUNTING DISTANCE (d)	A	B	C	D	E	F
5221/5222 (6X5)	3ft	28.9fc	13.6fc	8.8fc	4.1fc	0.70fc	0.32fc
	4ft	16.3fc	7.7fc	5.0fc	2.3fc	0.39fc	0.18fc
	5ft	10.4fc	4.9fc	3.2fc	1.5fc	0.25fc	0.12fc
	6ft	7.2fc	3.4fc	2.2fc	1.0fc	0.18fc	0.08fc
	7ft	5.3fc	2.5fc	1.6fc	0.75fc	0.13fc	0.06fc
	8ft	4.1fc	1.9fc	1.2fc	0.58fc	0.10fc	0.05fc
	9ft	3.2fc	1.5fc	0.98fc	0.45fc	0.08fc	0.04fc
	10ft	2.6fc	1.2fc	0.79fc	0.37fc	0.06fc	0.03fc

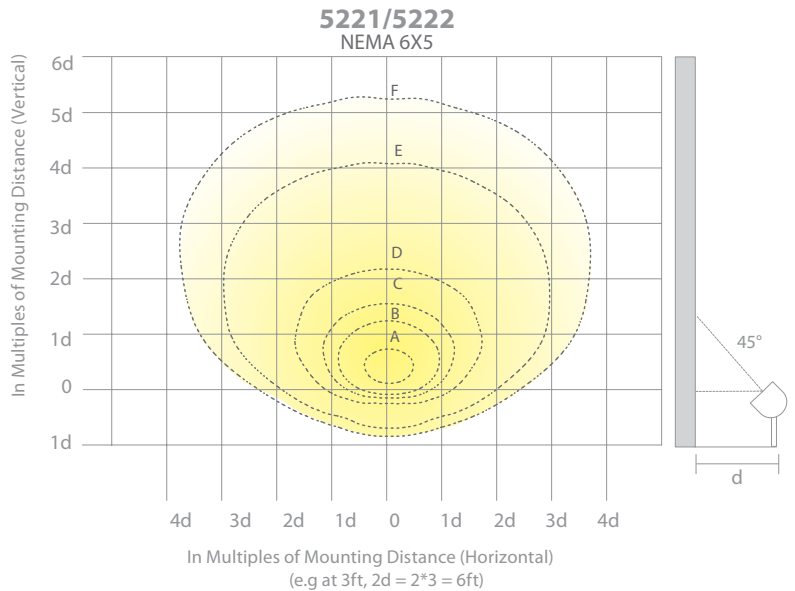

Index

1000-CON-PVC	30	5000-SCP.....	6, 8, 12, 14, 16, 18 20, 40, 42, 44, 48, 50, 52, 54 56, 58, 60, 61, 64, 66, 98
1011	30	5000-TCL	6, 8, 10, 14, 16, 20, 98
1021	30	5000-TCP	6, 8, 10, 14, 16, 18, 20, 98
1031	30	5000-TST-BK	8, 10, 14, 16, 20, 98
1041	30	5000-X	14, 20
1051	30	5010-LSHR.....	8, 98
1061	30	5010-SNOOT	8, 98
2000-CON-PVC	32	5011	8
2011	30	5012	8, 99
2021	30	5021	18
2031	28	5022	18, 98
2041	94	5030-GRD	24
2051	32	5030-PIP-PVC	24
2061	92	5031	24
2071	32	5032	24, 99
2081	31	5111	10
2091	32	5111-LSHR	10, 12, 14, 90
2101	32	5111-SNOOT	10, 14, 90
2111	32	5121	20
2121	32	5211	6
2131	32	5211-LSHR.....	6, 90
2501	40	5211-SNOOT	6, 90
2511	40	5212	6
2541	40	5311	14
2571	40	5411	14
2591	40	5511	28
3011	90	6011	66
3021	90	6021	56
3031	90	6031	64
3611	36	6041	48
3811	34	6042	48
3821	34	6051	50
3831	34	6053	50
4011	92	6061	58
4021	92	6071	60
4031	95	6081	52
4051	96	6091	62
4071	96	6111	12
4091	95	6211	12
4501	94	6311	54
4901	94	6321	54
5000-GM	6, 8, 10, 14, 16, 18, 20, 90, 98		
5000-LCO.....	18		

Index

6401	44
6511	48
6521	48
6611, 6612, 6613	70
6631, 6633, 6632	72
6621, 6622, 6623	76
6641, 6642, 6643	78
7032	42
7062	42
7122	42
7182	42
8000	82
8001	82
8002	82
8003	82
8011	82
8051	82
8101	82
9000-MTI-WT	97
9000-PCH-GY	97
9000-PCR-GY	97
9000-SP9	6, 8, 10, 14, 18, 20, 40, 42, 44 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 98
9000-ST9	6, 8, 10, 14, 18, 20, 40, 42, 44, 48, 50 52, 54, 56, 58, 60, 62, 64, 66, 98
9000-ST14	6, 8, 10, 14, 18, 20, 40, 42, 44 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 90
9020-WNT	28, 97
9075-TRN-SS	97
9100	97
9150-TRN-SS	97
9250	97
9300-TRN-SS	97
9500	97
9600-TRN-SS	97

A

ARCHETYPE	77, 78, 79, 80
-----------	----------------

C

CHAMBER	71, 72, 73, 74
---------	----------------

E

EN-O24100-RB2-T	86, 88
EN-OD24100-RB2-T	86

F

FM-W2505	111
FM-W2510	111
FM-W2605	113
FM-W2612	113

L

LED-TCO	88
LED-TO24	86, 88
LED-TO24-C1	86, 88
LED-TO24-C2	86, 88
LED-TO24-C3	86, 88
LED-TO24-CH5	86, 88
LED-TO24-CM	86, 88
LED-TO24-CS	86, 88
LED-TO24-EC	86, 88
LED-TO24-IC	86, 88
LED-TO24-IC6	86, 88
LED-TO24-IC6-RGB	86, 88
LED-TO24-IC12	86, 88
LED-TO24-IC12-RGB	86, 88
LED-TO24-IC72	86, 88
LED-TO24-IC72-RGB	86, 88
LED-TO24-IC120	86, 88
LED-TO24-IC120-RGB	86, 88
LED-TO24-MW	88
LED-TO24-MW60	88
LED-TO24-MW120	88
LED-TO24-SW	88
LED-TO24-SW60	88
LED-TO24-SW120	88
LED-TO24-WS	88
LED-TO24-X	88
LED-TO24-X-RGB	88
LED-TO24-Y	88
LED-TO24-Y-RGB	88
LENS-2X3	20, 90
LENS-2X4	18, 98
LENS-16	10, 98
LENS-20	8, 98

Index

LENS-25	6, 24, 98
M	
M6000-STAKE	6, 8, 10, 14, 18, 70, 72, 76, 78
M6610-CON-KIT	70
M6620-CON-KIT	72
M6630-CON-KIT	76
M6640-CON-KIT	78
MS-120.....	104, 105, 109, 110
P	
PC-120	104, 105, 109, 110
PD-W2605	113
PD-W15918.....	80
PD-W15928.....	80
PD-W48616.....	74
PM-W48620	74
PS-24DC-U96R-WE	84
PS-24DC-U96P-WE	84
T	
T24-OD1	84
T24-OD2	84
T24-WE-BO12-BK	84
T24-WE-BO72-BK	84
T24-WE-C3.....	84
T24-WE-CH5	84
T24-WE-EX2-006-BK	84
T24-WE-EC	84
T24-WE-IC-002-BK	84
T24-WE-IC-006-BK	84
T24-WE-IC-012-BK	84
T24-WE-IC-036-BK	84
T24-WE-IC-072-BK	84
T24-WE-IC-144-BK	84
T24-WE-IC-240-BK	84
T24-WE-SI-45	84
T24-WE-Y-BK	84
W	
WL-5105.....	102
WL-5205.....	102
WL-LED100.....	92
WL-LED120.....	96
WL-LED130.....	96
WL-LED140.....	95
WL-LED200.....	92
WL-LED210.....	95
WL-LED220.....	96
WP-LED119.....	109
WP-LED127.....	109
WP-LED135.....	109
WP-LED219.....	110
WP-LED227.....	110
WP-LED235.....	104
WP-LED254.....	104
WP-LED415.....	105
WP-LED430.....	106
WP-LED514.....	108
WP-LED529.....	107
WS-W2504.....	112
WS-W2505.....	112
WS-W2509.....	112
WS-W2510.....	112
WS-W2604.....	114
WS-W2605.....	114
WS-W2609.....	114
WS-W2610.....	114
WS-W13918	79
WS-W15912	79
WS-W15918	79
WS-W15924	79
WS-W20506	112
WS-W48612	73
WS-W48616	73
WS-W48620	73
WS-W48625	73



Headquarters

Tel: 800.526.2588

Fax: 800.526.2585

44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway

Suite 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 Archibald Ave

Ontario, CA 91761

Custom Orders

customs@wacighting.com

Consult with us to take advantage of our custom capabilities.



WAC

LANDSCAPE LIGHTING

WAC Landscape Lighting technology is protected by several patents and pending patent applications, including U.S. Patent Nos. 9,784,440, 10,190,757, 10,208,935, 10,323,832, 10,330,294, 10,465,888, 10,571,101, 10,598,358, 10,920,971, 10,928,045, 10,941,924, 10,962,209, 10,969,088, 10,989,401, 11,199,319, 11,274,816, 11,280,483, 11,460,177, 11,408,597.

WAC Lighting will not hesitate to enforce its intellectual property rights through injunctive relief and seek further relief through damages if it has reason to believe its patents are being infringed. WAC Lighting retains the right to modify the design of its products at any time as part of the company's continuous improvement program.

Please refer to our website for the latest product specifications. Copyright 2023® All rights reserved.

800.526.2588 | waclandscapelighting.com