



MODERN FORMS
SMART FANS

2023

Sleek design, advanced technology and flexible control solutions. Connect with smart home devices you already own to ensure the ultimate in comfort and seamless interoperability. With state-of-the-art features, color temperature options and silent energy-efficient DC motors, our smart fans stand alone. The future of luxury is here.

Ultra Smart Fan 54"	10
Torque 58" & 70"	14
Aura 72"	18
Lucid 62"	22
Skylark Flush 54"	26
Skylark 54" & 62"	30
Zephyr 52" & 62"	34
Aviator Flush 54"	38
Aviator 5 Flush 54"	42
Aviator 54"	46
Aviator 5 54" & 70"	50
Cervantes 56"	54
Renegade 52" & 66"	58
Wyndmill 65"	62
Woody 60"	66
Osprey 56"	70
Windflower 60" & 80"	74
Mykonos 52"	78
Mykonos 5 60"	82
Wynd 42", 52" & 60"	86
Wynd XL 72"	92
Vortex 60"	96
Slim Flush 52"	100
Slim 52"	104
Tip-Top 44" & 52"	108
Morpheus 60"	112
Roboto 52" & 62"	116
Roboto XL 70"	120
Roboto XL 70" (with Luminaire)	120
Lotus 54"	124
Vox Flush 26" & 38"	128
Vox 26" & 38"	132
Axis Flush 44" & 52"	134
Axis 44" & 52"	140
Corona 44" & 52"	144
Hydra 80", 96" & 120"	148
Accessories	154

DESIGN INTEGRITY

Intentionally engineered for durability and continuity throughout your design.

MATERIALS

Sturdy die-cast aluminum & marine-grade stainless steel housings provide elegance and sophistication.

COHESIVENESS

Maintain design continuity indoors and out by selecting a designer fan that complements the architecture.



WET RATING

Wet rated Smart Fans celebrate your home as an oasis for both indoor and outdoor living.

Across the Modern Forms brand, each smart fan is beautifully crafted for both interior and exterior applications. Architectural powder coated finished or 316 Marine grade stainless steel housings and rigid composite or solid carved wood blades are among the upgrades built in across the line.

Adding outdoor rated fans extend your enjoyment of the seasons by delivering a refreshing wind chill or keeping the bugs off while surrounded by nature.

The range of outdoor rated designs ensure you can maintain perfect harmony with the architectural style of any structure.

Whether you need a tiny 26 inch flush mounted fan or an epic 120 inch fan, Modern Forms has a fan that will allow you to carry your design throughout indoor and outdoor living spaces for seamless design continuity and connectivity.





MODERN FORMS SMART FAN TECHNOLOGY

Modern Forms is a highly reputable luxury brand with a complete line of smart indoor/outdoor ceiling fans in a wide range of sizes and designer styles that include intelligent controls and advanced technologies.

Modern Forms also offers a groundbreaking, patented ceiling fan and UV-C system - reflecting their commitment to technology and safety for their customers.

Each Modern Forms Smart Fans is intuitive for the modern customer—simple, yet personalized. Set up automated schedules and control your smart fan from anywhere. If you prefer an off-line experience, each fan operates efficiently and consistently at the push of a button using a factory-paired Bluetooth remote or wall control.

Enhanced security and multiple-user limited authority makes it suitable for both residential and commercial environments. Plus, multiple fans can operate on one circuit as never before, limited only by the load capacity of the circuit.

The smart fans integrate seamlessly with leading smart home systems you already own, including Control4, Google Assistant, Josh AI, Crestron, Amazon Alexa and Samsung SmartThings. Incorporate voice commands for a modern connected experience. Sync Modern Forms Smart Fans with smart thermostats such as Ecobee, to reduce heating and cooling bills throughout the year.





MODERN FORMS BLUETOOTH REMOTE TECHNOLOGY

CONTROL WITH CONFIDENCE.

Bluetooth Remote Technology controls both luminaire brightness and six fan speeds to ensure performance and reliability.

Nearly every Smart Fan is equipped with an energy efficient, state of the art LED luminaire—engineered by WAC to deliver beautiful robust illumination and precise 100-0% dimming control.

Change from summer to winter mode from your Bluetooth control to circulate cool air flow or reverse the fan to redistribute warm air. With your Modern Forms Smart Fan, easily switch modes at the push of a button or automatically as your thermostat changes from cooling to heating.

A Bluetooth remote pairs easily to an infinite number of intelligent ceiling fans located within a 150 foot range.




ULTRA SMART FAN

Groundbreaking ULTRA. A Smart Fan integrating UV-C radiating LED technology.

Using a patented system, which combines a UV-C radiating LED module with an air-circulating fan, the Ultra Smart Fan can reduce SARS COV-2 and Influenza A in breathable air spaces.

The Ultra Smart Fan circulates air through the upper room. Air passes above the UV-C Module, which acts to reduce the viruses in breathable air space.*

Visit page 10 for product information

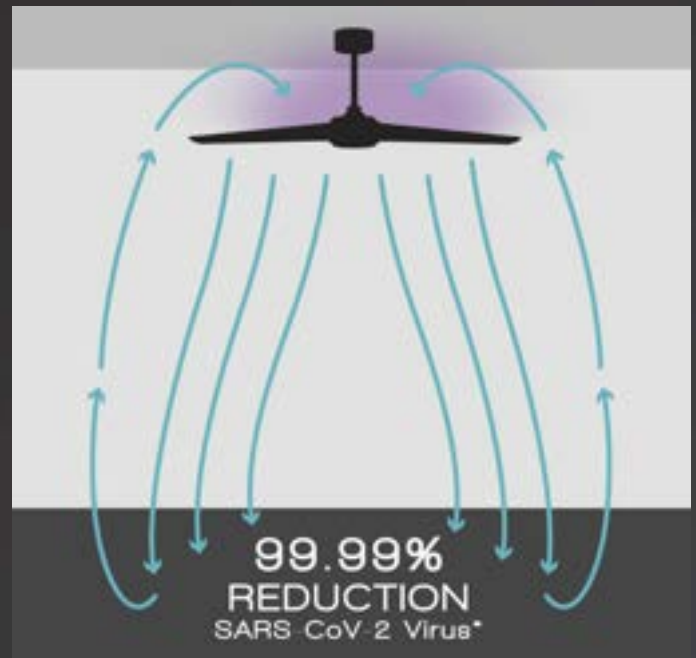

Based on tests conducted by an independent CAP and CLIA accredited lab, Innovative Bioanalysis, on the UV-C technology incorporated in the Ultra. The testing conducted on the ULTRA device, with UV-C module enabled and fan operating in the standard forward rotation at the highest speed setting, showed reduction of 99.99% of active SARS-CoV-2 and 99.77% of Influenza A in the breathable air space after 30 and 45 minutes of operation of the system, respectively, in a closed 8'x8'x10' room (approximately 69-72°F and 40-48% relative humidity), where the ULTRA was mounted on a 10-inch downrod with a total suspended height of 16 inches from the ceiling.

Disclaimer: While there may be information on our website relating to the Ultra Smart Fan's effectiveness in reducing airborne pathogens in the breathable air space*, Modern Forms makes no claims that its products can cure, treat or prevent any conditions. Always consult your healthcare provider with any health-related questions.





PATENTED

Ultra Smart Fan 54"

Shown: **FR-D2102-54U-BN/MB**

54 inch: **FR-D2102-54U***



Finish	Housing	Blade
BN/MB	Brushed Nickel	Matte Black
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

54" Ultra Smart Fan


Blade:	17° Pitch, 54" Sweep, ABS
Downrod:	3/4"W X 10"H + 3/4"W + 6H" included
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	18 lbs
Total Power:	47 W
LED Power:	16.5 W
LED Rated Life:	6,500hrs

*Ultra Smart Fan is Damp rated.

UV BLUETOOTH REMOTE CONTROL



F-RCUV-WT
 Included with each fan
 6 speeds
 ON/OFF

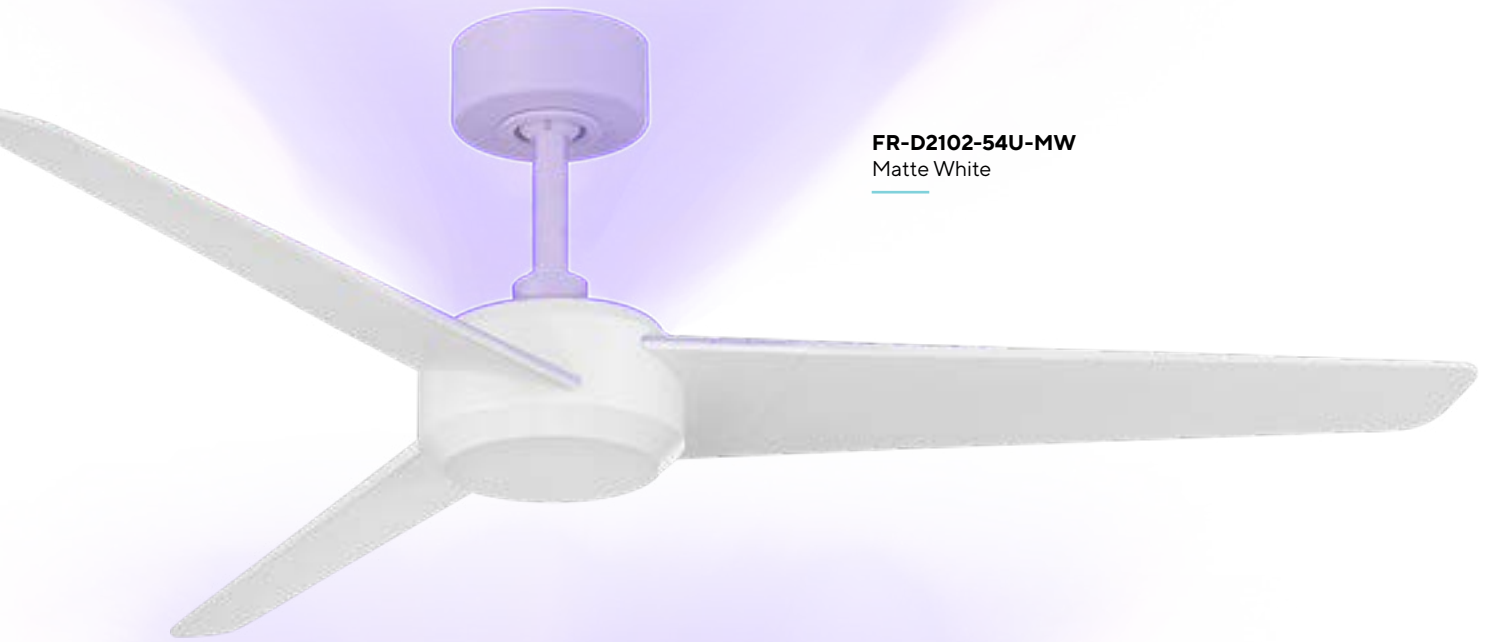

FR-D2102-54U-MW
Matte White



FR-D2102-54U-MB
Matte Black


54" Ultra Smart Fan




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	26 W	20 W
Airflow	5172 CFM	3278 CFM
Energy Costs*	-	\$5/yr
Efficiency	169 CFM/W	168 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

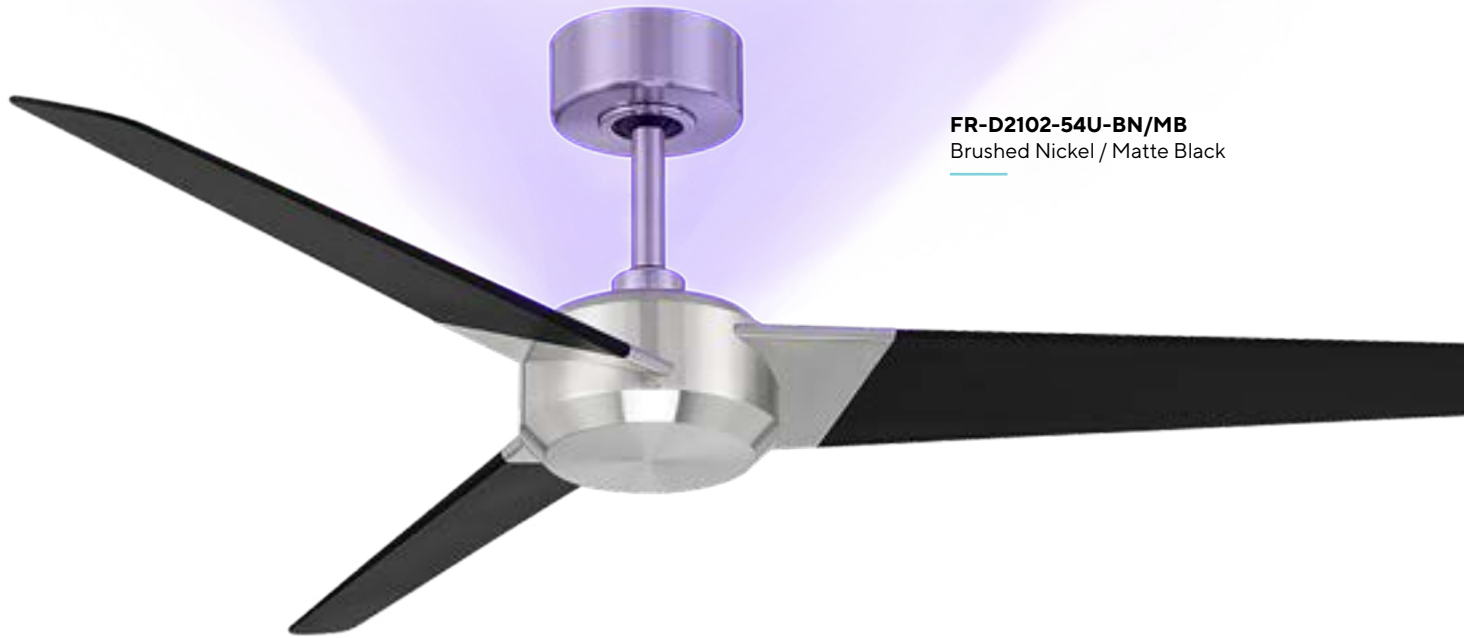

FR-D2102-54U-BN/MB
Brushed Nickel / Matte Black

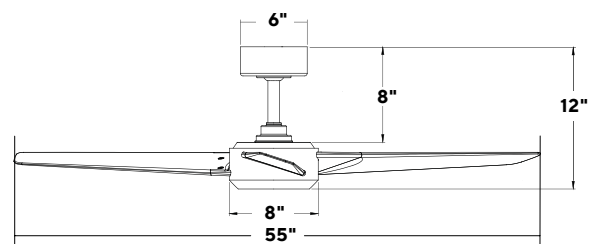





PATENTED

Torque 58" & 70"



Shown: **FR-W2204-70-SB/MW**

58 inch: FR-W2204-58
70 inch: FR-W2204-70



Finish	Housing	Blade
BN/EB	Brushed Nickel*	Ebony
MB	Matte Black	Matte Black
MB/DK	Matte Black	Distressed Koa
SB/MB	Soft Brass*	Matte Black
SB/MW	Soft Brass*	Matte White

SPECIFICATIONS

58" & 70" Torque

Blade:	16° or 17° Pitch, 58" or 70" Sweep, ABS
Downrod:	0.75ID x 4.5"H (for 58") or 8"H (for 70")
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	17.5 / 19 lbs
Total Power:	33 W/ 38 W


*Brushed Nickel and Soft Brass are not intended for coastal environments.

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
ON/OFF



F-WCBT-WT
Optional with each fan
6 speeds
ON/OFF

FR-W2204-58-SB/MW
Soft Brass/Matte White



FR-W2204-58-MB
Matte Black




58" Torque



ENERGY GUIDE


Standard	High Speed	Weighted Average
Electricity	33 W	23 W
Airflow	5765 CFM	4587 CFM
Energy Costs*	-	\$7/yr
Efficiency	175 CFM/W	168 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

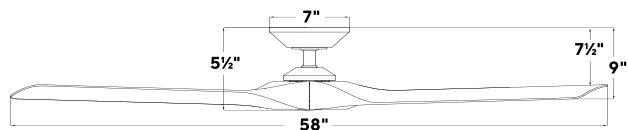



FR-W2204-70-BN/EB
Brushed Nickel/Ebony

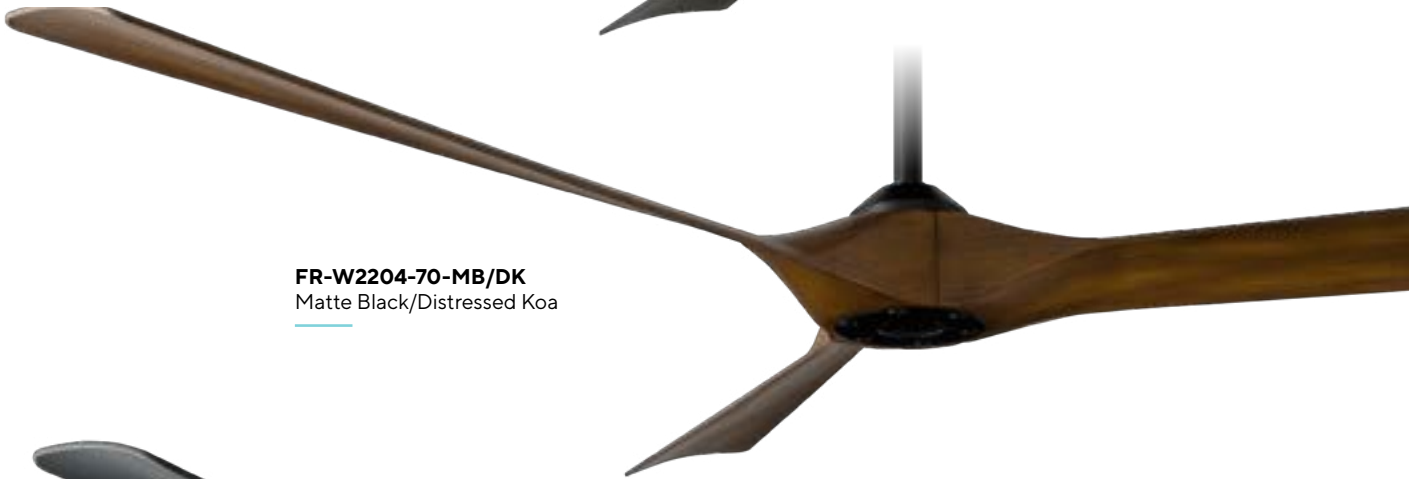

FR-W2204-70-MB/DK
Matte Black/Distressed Koa



FR-W2204-70-SB/MB
Soft Brass/Matte Black


70" Torque



ENERGY GUIDE

	Standard	High Speed	Weighted Average
Electricity		38 W	25 W
Airflow		8581 CFM	6154 CFM
Energy Costs*		-	\$7/yr
Efficiency		245 CFM/W	245 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

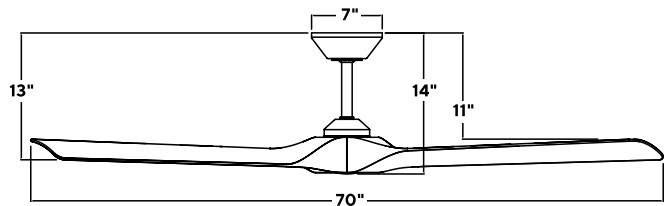



Aura 72"



PATENTED



72 inch: FR-W2303-72L 

Shown: FR-W2303-72L-SB/MB

Finish	Housing	Decorative Ring	Blade
BN/MB	Matte Black	Brushed Nickel	Matte Black
SB/MB	Matte Black	Soft Brass	Matte Black
SB/MW	Matte White	Soft Brass	Matte White

SPECIFICATIONS

72" Aura

Blade:	14° Pitch, 72" Sweep, ABS
Downrod:	0.75"ID x 6"H included
Mounting Slope:	Up to 30° standard
Lead Wire:	80"
Hanging Weight:	26.5 lbs
Total Power:	63 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE

FR-W2303-72L-SB/MB
 Soft Brass Decorative Ring/Matte Black



72" Aura



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	43 W	31 W
Airflow	9420 CFM	7188 CFM
Energy Costs*	-	\$8/yr
Efficiency	250 CFM/W	250 CFM/W


* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2303-72L-BN/MB
Brushed Nickel Decorative Ring/Matte Black



FR-W2303-72L-SB/MW
Soft Brass Decorative Ring/Matte White

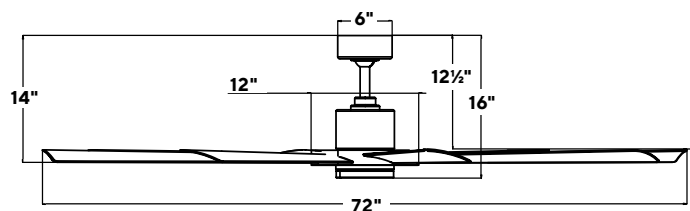





PATENTED

Lucid 62"

Shown: **FR-W2304-62L-SB/MW**

62 inch: **FR-W2304-62L** 

Finish	Housing/Blades	Blade Arms
SB/MB	Matte Black	Soft Brass
SB/MW	Matte White	Soft Brass

SPECIFICATIONS

62" Lucid

Blade:	16° Pitch, 62" Sweep, ABS
Downrod:	0.75"ID x 6"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	22 lbs
Total Power:	51 W
Lumens:	1600
LED Power:	19.5 W
CRI	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE

FR-W2304-62L-SB/MW
 Soft Brass/Matte White



62" Lucid




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	31 W	22 W
Airflow	6963 CFM	4788 CFM
Energy Costs*	-	\$6/yr
Efficiency	214 CFM/W	214 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2304-62L-SB/MB
Soft Brass/Matte Black

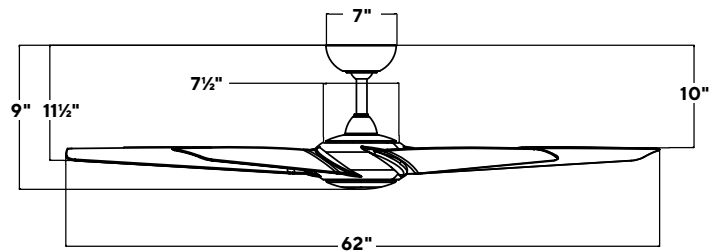





PATENTED

Skylark Flush 54"



Shown: **FH-W2202-54L-BN/EB**

54 inch: **FH-W2202-54L**



Finish	Housing	Blade
BN/EB	Brushed Nickel*	Ebony
MB	Matte Black	Matte Black
SB/MB	Soft Brass*	Matte Black
SB/MW	Soft Brass*	Matte White

SPECIFICATIONS

54" Skylark Flush

Blade:	14° Pitch, 54" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	17 lbs
Total Power:	50 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*Brushed Nickel and Soft Brass are not intended for coastal environments.


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF



FH-W2202-54L-MB
Matte Black



FH-W2202-54L-SB/MB
Soft Brass/Matte Black

54" Skylark Flush



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	31W	21 W
Airflow	5842 CFM	3768 CFM
Energy Costs*	-	\$6/yr
Efficiency	180 CFM/W	162 CFM/W


* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FH-W2202-54L-SB/MW
Soft Brass/Matte White



FH-W2202-54L-BN/EB
Brushed Nickel/Ebony

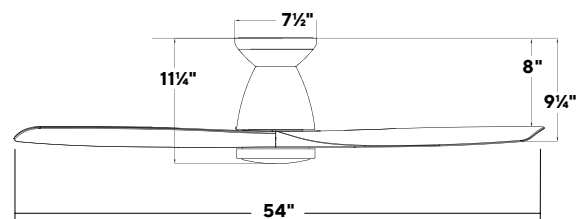





PATENTED

Skylark 54" & 62"

Shown: **FR-W2202-62L-BN/EB**

54 inch: FR-W2202-54L



62 inch: FR-W2202-62L



Finish	Housing	Blade
BN/EB	Brushed Nickel*	Ebony
MB	Matte Black	Matte Black
SB/MB	Soft Brass*	Matte Black
SB/MW	Soft Brass*	Matte White

SPECIFICATIONS

54" & 62" Skylark

Blade:	14° Pitch, 54" or 62" Sweep, ABS
Downrod:	4.5"H
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	16 / 18.5 lbs
Total Power:	48 / 47 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*Brushed Nickel and Soft Brass are not intended for coastal environments.


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF



FR-W2202-54L-BN/EB
Brushed Nickel/Ebony



FR-W2202-54L-MB
Matte Black


54" Skylark



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	28 W	20 W
Airflow	6041 CFM	3871 CFM
Energy Costs*	-	\$6/yr
Efficiency	191 CFM/W	162 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

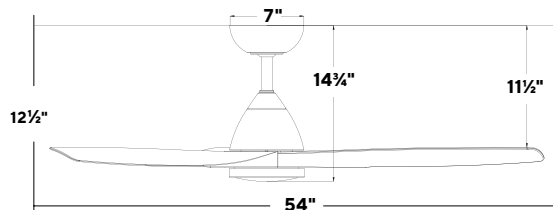



FR-W2202-62L-SB/MB
Soft Brass/Matte Black



FR-W2202-62L-SB/MW
Soft Brass/Matte White


62" Skylark



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	28 W	20 W
Airflow	6920 CFM	4524 CFM
Energy Costs*	-	\$6/yr
Efficiency	227 CFM/W	227 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

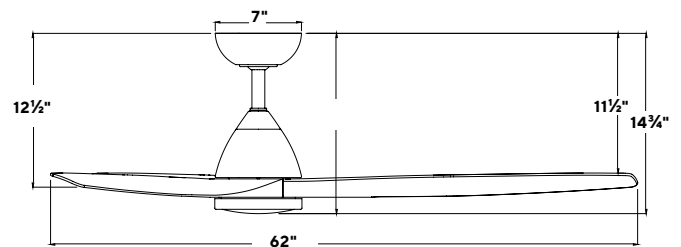







PATENTED

Zephyr 52" & 62"



52 inch: FR-W2006-52L 
62 inch: FR-W2006-62L 

Shown: **FR-W2006-62L-MB/DK**

Finish	Housing	Blade
MB/DK	Matte Black	Distressed Koa
GH/WW	Graphite	Weathered Wood
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

52" & 62" Zephyr

Blade:	17° Pitch, 52" or 62" Sweep, ABS
Downrod:	0.75"ID x 8"
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	17 / 19 lbs
Total Power:	49.5 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temp:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE



FR-W2006-52L-MB
Matte Black



FR-W2006-62L-MW
Matte White

*Shown with included luminaire cover


52" Zephyr



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	30 W	21 W
Airflow	4655 CFM	2975 CFM
Energy Costs*	-	\$6/yr
Efficiency	141 CFM/W	141 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.
*Tested with 0.75"ID x 8" rod

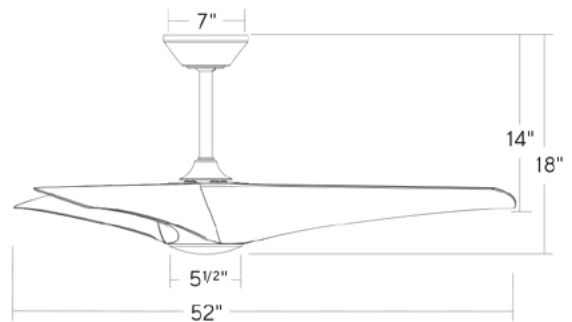



FR-W2006-62L-GH/WW
Graphite/Weathered Wood


62" Zephyr



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	30 W	22 W
Airflow	6272 CFM	4263 CFM
Energy Costs*	-	\$6/yr
Efficiency	197 CFM/W	197 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

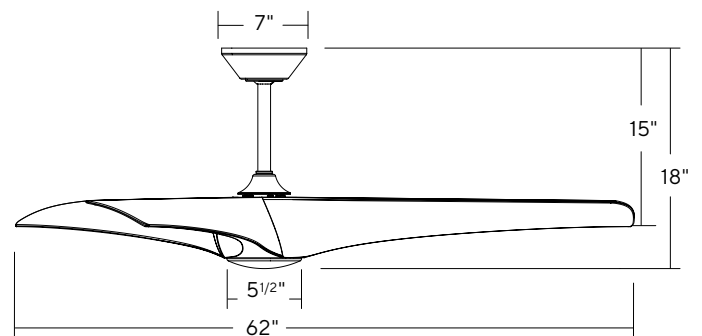





PATENTED

Aviator Flush 54"





Shown: **FH-W1811-54-MB/DK**

54 inch: **FH-W1811-54**



OPTIONAL LUMINAIRE (Sold Separately)

F-1811-LED-MB	Matte Black	
F-1811-LED-GH	Graphite	

Finish	Housing	Blade
MB	Matte Black	Matte Black
MB/DK	Matte Black	Distressed Koa
GH/WG	Graphite	Weathered Gray

SPECIFICATIONS

Blade:	13° Pitch, 54" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	13 lbs
Total Power:	23 W

54" Aviator Flush

Optional Aviator Luminaire

Lumens:	1600
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K standard. 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE

OPTIONAL BLUETOOTH WALL CONTROL



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FH-W1811-54-MB
Matte Black



FH-W1811-54-GH/WG
Graphite/Weathered Gray

54" Aviator Flush



ENERGY GUIDE


Standard	High Speed	Weighted Average
Electricity	23 W	13W
Airflow	6385 CFM	4258 CFM
Energy Costs*	-	\$4/yr
Efficiency	296.8 CFM/W	320 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FH-W1811-54-MB/DK
Matte Black/Distressed Koa

*Shown with optional luminaire

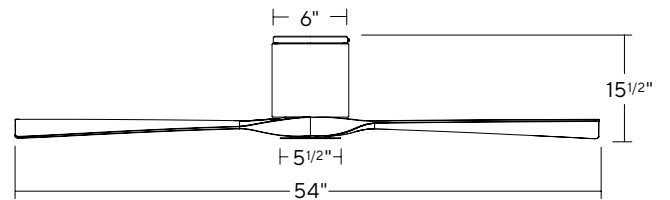



Aviator 5 Flush ^{54"}

Shown: **FH-W1811-5-GH/WG**

54 inch: FH-W1811-5



OPTIONAL LUMINAIRE (Sold Separately)

	Finish	Housing	Blade
F-1811-5-LED-MB Matte Black 	MB	Matte Black	Matte Black
F-1811-5-LED-GH Graphite 	MB/DK	Matte Black	Distressed Koa
	GH/WG	Graphite	Weathered Gray

SPECIFICATIONS

54" Aviator 5 Flush

Blade:	13° Pitch, 54" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	21 lbs
Total Power:	38 W

Optional Aviator Luminaire

Lumens:	1600
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K standard. 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FH-W1811-5-MB/DK
Matte Black/Distressed Koa



FH-W1811-5-GH/WG
Graphite/Weathered Gray
*Shown with optional luminaire

54" Aviator 5 Flush




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	38 W	27W
Airflow	7822 CFM	5296 CFM
Energy Costs*	-	\$7/yr
Efficiency	198 CFM/W	198 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FH-W1811-5-MB
Matte Black

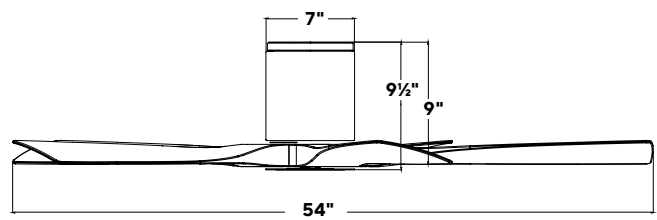





PATENTED

Aviator 54"





Shown with optional luminaire:
FR-W1811-54-MB/DK

54 inch: FR-W1811-54



OPTIONAL LUMINAIRE (Sold Separately)

	Finish	Housing	Blade
F-1811-LED-MB	Matte Black		MB Matte Black
F-1811-LED-GH	Graphite		MB/DK Matte Black GH/WG Graphite

SPECIFICATIONS

54" Aviator

Blade:	13° Pitch, 54" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	13 lbs
Total Power:	20 W

Optional Aviator Luminaire

Lumens:	1600
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K standard. 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE



FR-W1811-54-MB
Matte Black



FR-W1811-54-GH/WG
Graphite/Weathered Gray

*Shown with optional luminaire

54" Aviator




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	20 W	13W
Airflow	7030 CFM	4653 CFM
Energy Costs*	-	\$4/yr
Efficiency	345 CFM/W	368 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1811-54-MB/DK
Matte Black/Distressed Koa

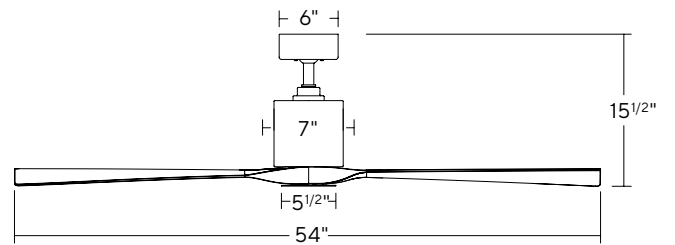





PATENTED

Shown with optional luminaire:
FR-W1811-70-GH/WG

Aviator 5 54" & 70"

54 inch: FR-W1811-5
70 inch: FR-W1811-70



OPTIONAL LUMINAIRE (Sold Separately)

F-1811-5-LED-MB Matte Black 

F-1811-5-LED-GH Graphite 

Finish	Housing	Blade
MB	Graphite	Matte Black
MB/DK	Matte Black	Distressed Koa
GH/WG	Graphite	Weathered Gray

SPECIFICATIONS

Blade:	14° Pitch, 54" or 70" Sweep, ABS
Downrod:	0.75" ID x 4.5 H Included
Mounting Slope	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	23 lbs
Total Power:	36 / 40 W

54" & 70" Aviator 5

Optional Aviator Luminaire

Lumens:	1600
LED Power:	19.5W
CRI:	90
Color Temperature:	3000K standard. 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE

OPTIONAL BLUETOOTH WALL CONTROL



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE



FR-W1811-5-MB/DK
Matte Black/Distressed Koa
*Shown with optional luminaire



FR-W1811-5-MB
Matte Black



FR-W1811-5-GH/WG
Graphite/Weathered Gray


54" Aviator 5



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	36 W	24 W
Airflow	8418 CFM	5638 CFM
Energy Costs*	-	\$7/yr
Efficiency	238 CFM/W	368 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

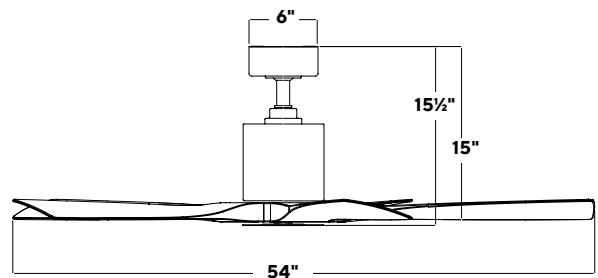



FR-W1811-70-GH/WG
Graphite/Weathered Gray

*Shown with optional luminaire



FR-W1811-70-MB
Matte Black



FR-W1811-70-MB/DK
Matte Black/Distressed Koa


70" Aviator 5



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	40 W	28 W
Airflow	11624 CFM	8431 CFM
Energy Costs*	-	\$8/yr
Efficiency	337 CFM/W	306 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

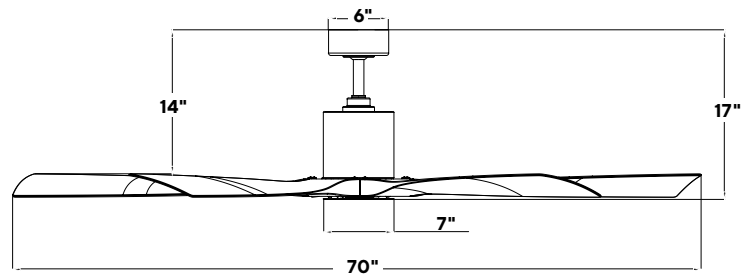





PATENTED

Cervantes 56"

Shown: **FR-W1806-56L-MB/BW**

56 inch: **FR-W1806-56L**

Finish	Housing	Blade
MB/BW	Matte Black	Barn Wood
OB/DW	Oil Rubbed Bronze	Dark Walnut

SPECIFICATIONS

56" Cervantes

Blade:	14° Pitch, 56" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° Standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	13.5 lbs
Total Power:	48.5 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W1806-56L-MB/BW
Matte Black/Barn Wood

56" Cervantes

ENERGY GUIDE


Standard	High Speed	Weighted Average
Electricity	29 W	13 W
Airflow	6577 CFM	2798 CFM
Energy Costs*	-	\$8/yr
Efficiency	228 CFM/W	211 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1806-56L-OB/DW
Oil Rubbed Bronze/Dark Walnut

*Shown with included luminaire cover

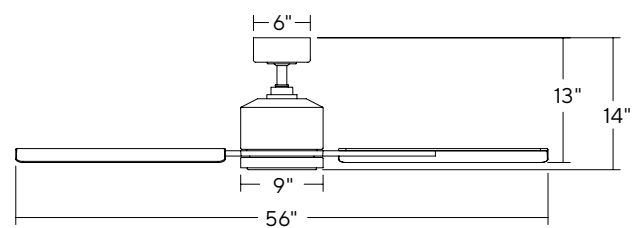





PATENTED

Renegade 52" & 66"

52 inch: FR-W2001-52L

66 inch: FR-W2001-66L



Shown: **FR-W2001-66L-OB/BW**

Finish	Housing	Blade
BN/MB	Brushed Nickel*	Matte Black
GH/WW	Graphite	Weathered Wood
MB	Matte Black	Matte Black
OB/BW	Oil Rubbed Bronze	Barn Wood

SPECIFICATIONS

52" & 66" Renegade

Blade:	14° Pitch, 52" or 66" Sweep, ABS
Downrod:	0.75"ID x 6"H Included
Mounting Slope:	Up to 30° Standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	25 / 28 lbs
Total Power:	55 / 58 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

* A finished cover is included when not using the luminaire. ** For 2700K or 3500K add -27 or -35 to the model number.


*Brushed Nickel is not intended for coastal environments.

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W2001-52L-OB/BW
Oil Rubbed Bronze/Barn Wood

*Shown with included luminaire cover



FR-W2001-52L-BN/MB
Brushed Nickel/Matte Black


52" Renegade



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	32.5 W	23 W
Airflow	7445 CFM	4680 CFM
Energy Costs*	-	\$6/yr
Efficiency	219 CFM/W	203 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

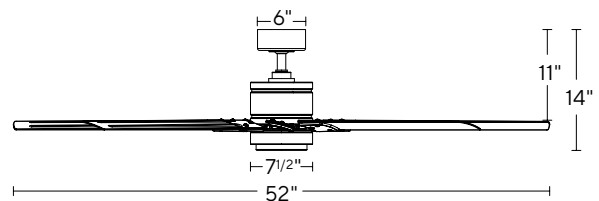



FR-W2001-66L-MB
Matte Black



FR-W2001-66L-GH/WW
Graphite/Weathered Wood


66" Renegade



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	38 W	27 W
Airflow	10146 CFM	7069 CFM
Energy Costs*	-	\$8/yr
Efficiency	259 CFM/W	261 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

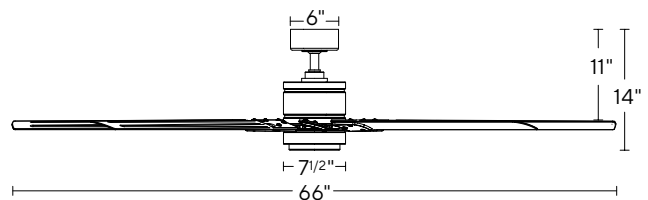





PATENTED

Wyndmill^{65"}



Shown: **FR-W2201-65L-ST/WW**

65 inch: **FR-W2201-65L**



Finish	Housing	Blade
MB/BW	Matte Black	Barnwood
MB	Matte Black	Matte Black
ST/WW	Steel	Weathered Wood

SPECIFICATIONS

65" Wyndmill

Blade:	13° Pitch, 65" Sweep, ABS
Downrod:	0.75" ID x 6"H Included
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	38 lbs
Total Power:	66 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temp:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs


** For 2700K or 3500K add -27 or -35 to the model number .

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF

FR-W2201-65L-MB
Matte Black



FR-W2201-65L-ST/WW
Steel/Weathered Wood



65" Wyndmill




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	46 W	30 W
Airflow	9505 CFM	6625 CFM
Energy Costs*	-	\$9/yr
Efficiency	218 CFM/W	117 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2201-65L-MB/BW
Matte Black/Barnwood

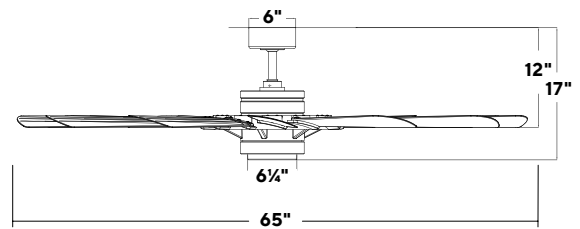





PATENTED

Woody 60"



60 inch: FR-W1814-60L



Shown: **FR-W1814-60L-GH/WG**

Finish	Housing	Blade
GH/WG	Graphite	Weathered Gray
MB/DK	Matte Black	Distressed Koa
BZ/DW	Bronze	Dark Walnut

SPECIFICATIONS

60" Woody

Blade:	23° Pitch, 60" Sweep, Carved Wood
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° Standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	19 lbs
Total Power:	72.5 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W1814-60L-BZ/DW
Bronze/Dark Walnut

*Shown with included luminaire cover

60" Woody



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	32 W	13 W
Airflow	7306 CFM	5612 CFM
Energy Costs*	-	\$5/yr
Efficiency	276 CFM/W	228 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.




PATENTED



FR-W1814-60L-MB/DK
Matte Black/Distressed Koa



FR-W1814-60L-GH/WG
Graphite/Weathered Gray

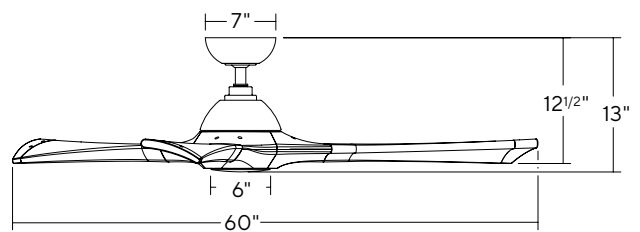





PATENTED

Osprey^{56"}



56 inch: FR-W1817-56L

Shown: **FR-W1817-56L-MB/BW**

Finish	Housing	Blade
MB/BW	Matte Black	Barn Wood
OB/DW	Oil Rubbed Bronze	Dark Walnut

SPECIFICATIONS

56" Osprey

Blade:	13° Pitch, 56" Sweep, ABS
Downrod:	0.75"ID x 4.5"H included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	17 lbs
Total Power:	34 W
Lumens:	1110
LED Power:	13 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W1817-56L-MB/BW
Matte Black/Barn Wood

56" Osprey


ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	21 W	13 W
Airflow	6278 CFM	2798 CFM
Energy Costs*	-	\$4/yr
Efficiency	211 CFM/W	209 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1817-56L-OB/DW
Oil Rubbed Bronze/Dark Walnut

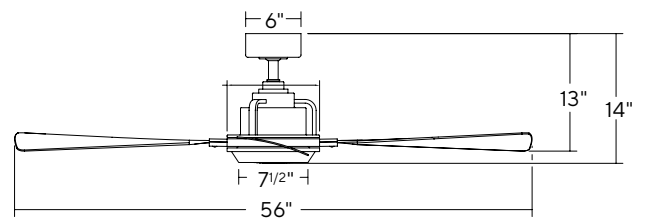





PATENTED

Windflower 60" & 80"

Shown: **FR-W1815-60L-MB/DK**

60 inch: FR-W1815-60L
80 inch: FR-W1815-80L

Finish	Housing	Blade
GH/WG	Graphite	Weathered Gray
MB/DK	Matte Black	Distressed Koa

SPECIFICATIONS

60" & 80" Windflower


Blade:	12° Pitch, 60" or 80" Sweep, ABS
Downrod:	0.75"ID x 4.5"H (for 60") or 6"H (for 80") included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	34.5 / 42 lbs
Total Power:	61.5 W / 67.5 W
Lumens:	2041
LED Power:	23.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire

**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH WALL CONTROL

OPTIONAL BLUETOOTH REMOTE CONTROL



F-WCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-RCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE




FR-W1815-60L-GH/WG
 Graphite/Weathered Gray

60" Windflower

ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	44 W	30 W
Airflow	8458 CFM	5492 CFM
Energy Costs*	-	\$9/yr
Efficiency	190 CFM/W	181 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

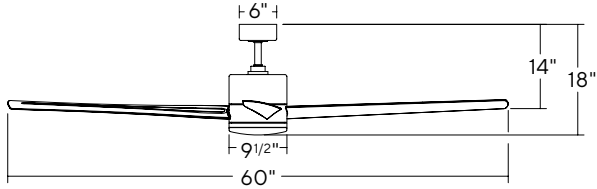




FR-W1815-80L-MB/DK
Matte Black/Distressed Koa

80" Windflower

ENERGY GUIDE

	Standard	High Speed	Weighted Average
Electricity		38 W	27 W
Airflow		10648 CFM	7318 CFM
Energy Costs*		-	\$8/yr
Efficiency		278 CFM/W	269 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

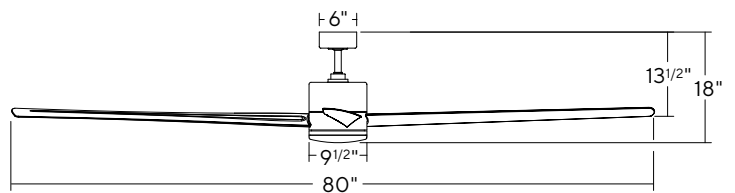





PATENTED

Mykonos 52"

52 inch: FR-W1819-52L



Shown: **FR-W1819-52L-MB**

Finish	Housing	Blade
BZ/DW	Bronze	Dark Walnut
MB	Matte Black	Matte Black
MW	Matte White	Matte White
OB/BW	Oil Rubbed Bronze	Barn Wood

SPECIFICATIONS

52" Mykonos

Blade:	15° Pitch, 52" Sweep, ABS
Downrod:	0.75"ID x 4.5"H included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	19 lbs
Total Power:	45 W
Lumens:	1110
LED Power:	13 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W1819-52L-BZ/DW
Bronze/Dark Walnut



FR-W1819-52L-MB
Matte Black

52" Mykonos



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	32 W	24 W
Airflow	6001 CFM	4205 CFM
Energy Costs*	-	\$7/yr
Efficiency	177 CFM/W	177 CFM/W


* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1819-52L-OB/BW
Oil Rubbed Bronze/Barn Wood



FR-W1819-52L-MW
Matte White

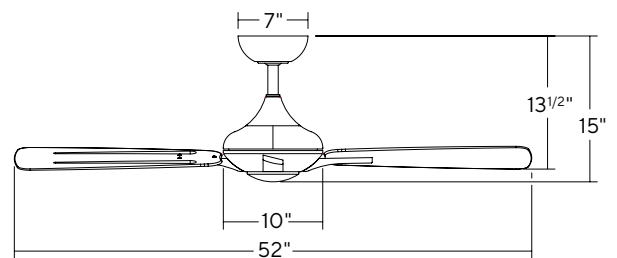





PATENTED

Mykonos 5 ^{60"}

60 inch: FR-W2008-60L



Shown: **FR-W2008-60L-OB/BW**

Finish	Housing	Blade
BZ/DW	Bronze	Dark Walnut
MB	Matte Black	Matte Black
MW	Matte White	Matte White
OB/BW	Oil Rubbed Bronze	Barn Wood

SPECIFICATIONS

60" Mykonos 5

Blade:	14° Pitch, 60" Sweep, ABS
Downrod:	0.75"ID x 6"H included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	23 lbs
Total Power:	53 W
Lumens:	1110
LED Power:	13 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W2008-60L-OB/BW
Oil Rubbed Bronze/Barn Wood



FR-W2008-60L-MB
Matte Black

60" Mykonos 5



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	40 W	27 W
Airflow	6970 CFM	4593 CFM
Energy Costs*	-	\$7/yr
Efficiency	174 CFM/W	172 CFM/W


* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2008-60L-BZ/DW
Bronze/Dark Walnut



FR-W2008-60L-MW
Matte White

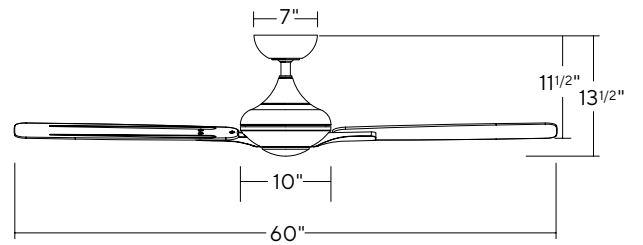





PATENTED

Wynd 42", 52" & 60"

Shown: **FR-W1801-52L-SS**

42 inch: FR-W1801-42L
52 inch: FR-W1801-52L
60 inch: FR-W1801-60L



Finish	Housing	Blade
BZ	Bronze	Bronze
GH/WG	Graphite	Weathered Gray
MB	Matte Black	Matte Black
MW	Matte White	Matte White
SS	Stainless Steel	Stainless Steel

*Stainless Steel Housing is a 316 Marine Grade material

SPECIFICATIONS

42", 52" & 60" Wynd

Blade:	13° Pitch, 42", 52" or 60" Sweep, ABS
Downrod:	0.75" ID x 4.5" H Included
Mounting Slope:	Up to 30° Standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	18 / 21 / 24 lbs
Total Power:	44.5 / 45.5 / 54.5 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE



FR-W1801-42L-BZ
Bronze



FR-W1801-42L-GH/WG
Graphite/Weathered Gray



FR-W1801-42L-MB
Matte Black


42" Wynd



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	27 W	20 W
Airflow	4981 CFM	3199 CFM
Energy Costs*	-	\$6/yr
Efficiency	182 CFM/W	158 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

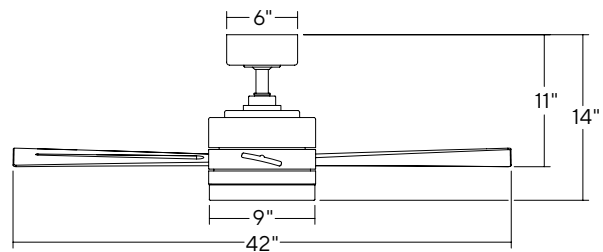



FR-W1801-52L-SS
Stainless Steel

*Shown with included
luminaire cover



FR-W1801-52L-MW
Matte White


52" Wynd



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	35 W	21 W
Airflow	6270 CFM	4286 CFM
Energy Costs*	-	\$6/yr
Efficiency	209 CFM/W	207 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

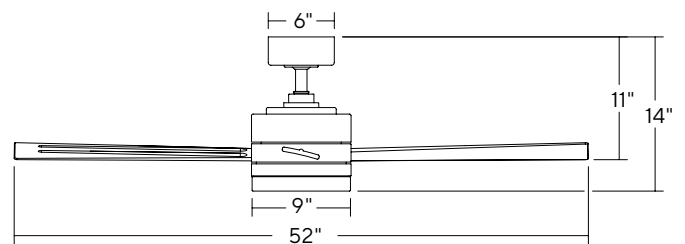



FR-W1801-60L-MW
Matte White



FR-W1801-60L-GH/WG
Graphite/Weathered Gray



60" Wynd



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	52 W	27 W
Airflow	7516 CFM	5320 CFM
Energy Costs*	-	\$7/yr
Efficiency	184 CFM/W	199 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1801-60L-MB
Matte Black


*Shown with included luminaire cover



FR-W1801-60L-SS
Stainless Steel



FR-W1801-60L-BZ
Bronze

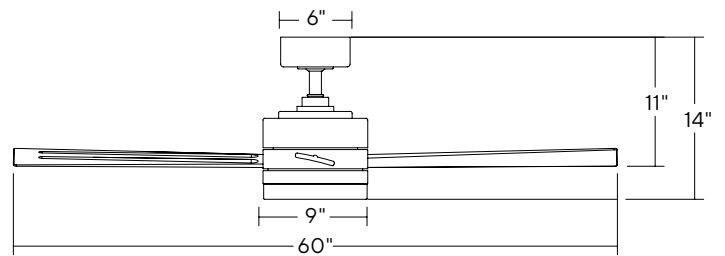



THE MUSEUM OF MODERN ART BY HIRSH



PATENTED

Wynd XL^{72"}

72 inch: FR-W2101-72L



Shown: **FR-W2101-72L-SS**

Finish	Housing	Blade
BZ	Bronze	Bronze
MB	Matte Black	Matte Black
MW	Matte White	Matte White
SS	Stainless Steel	Stainless Steel

*Stainless Steel Housing is a 316 Marine Grade material

SPECIFICATIONS

72" Wynd XL

Blade:	13° Pitch, 72" Sweep
Downrod:	0.75"ID x 6"H Included
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	33 lbs
Total Power:	79 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W2101-72L-BZ
Bronze



FR-W2101-72L-SS
Stainless Steel

*Shown with
316 Marine Grade Material

72" Wynd XL



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	35 W	27 W
Airflow	11926 CFM	8821 CFM
Energy Costs*	-	\$9/yr
Efficiency	272 CFM/W	266 CFM/W


* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2101-72L-MW
Matte White



FR-W2101-72L-MB
Matte Black

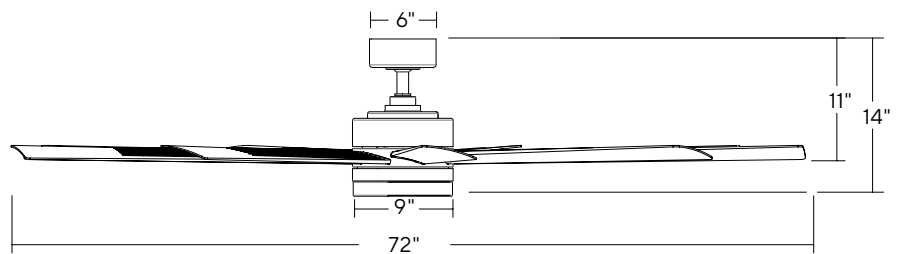





PATENTED

Vortex^{60"}



60 inch: FR-W1810-60

Shown: **FR-W1810-60-AS**

Finish	Housing	Blade
AS	Automotive Silver	Automotive Silver
GB	Gloss Black	Gloss Black
GW	Gloss White	Gloss White

SPECIFICATIONS

60" Vortex


Blade:	13° Pitch, 60" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	13 lbs
Total Power:	21W

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL




F-RCBT-WT
Included with each fan
6 speeds
ON/OFF



F-WCBT-WT
Optional with each fan
6 speeds
ON/OFF



FR-W1810-60-GW
Gloss White

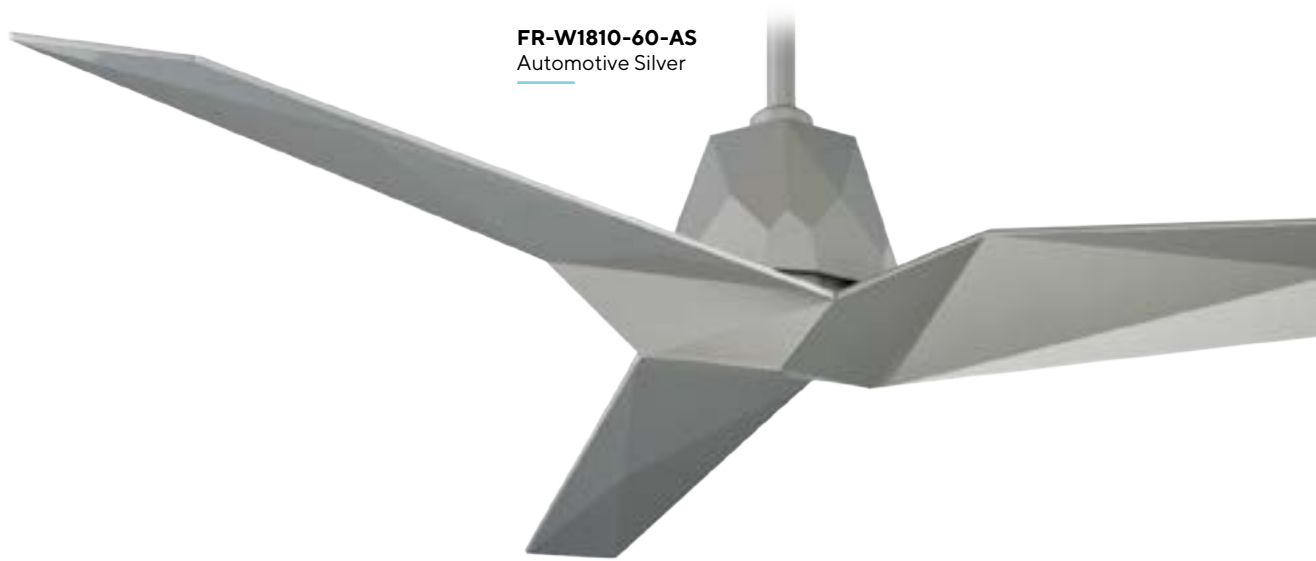

FR-W1810-60-AS
Automotive Silver

60" Vortex


ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	21 W	13 W
Airflow	7663 CFM	5207 CFM
Energy Costs*	-	\$4/yr
Efficiency	363 CFM/W	404 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1810-60-GB
Gloss Black

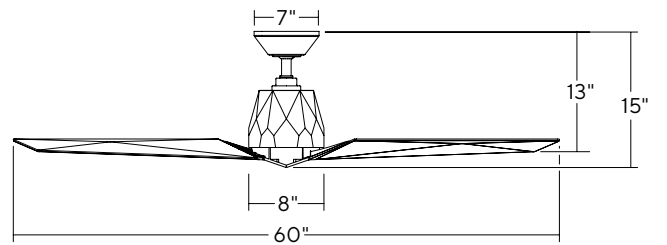





PATENTED

Slim Flush^{52"}

52 inch: FH-W2003-52L



Shown: **FH-W2003-52L-MW**

Finish	Housing	Blade
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

52" Slim Flush

Blade:	14° Pitch, 52" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	17 lbs
Total Power:	31.5 W
Lumens:	1110
LED Power:	11.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE

FH-W2003-52L-MW
Matte White

*Shown with included luminaire cover

52" Slim Flush




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	21 W	17 W
Airflow	5885 CFM	3961 CFM
Energy Costs*	-	\$5/yr
Efficiency	173 CFM/W	242 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FH-W2003-52L-MB
Matte Black

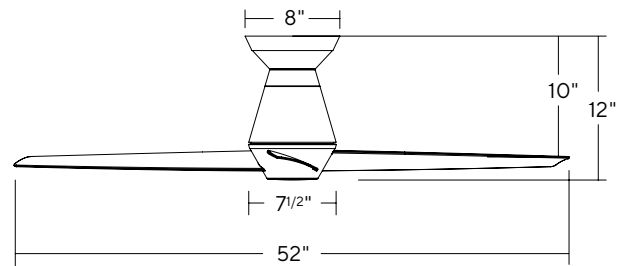





PATENT PENDING

Slim 52"



Shown with included luminaire cover:
FR-W2003-52L-MB

52 inch: **FR-W2003-52L**



Finish	Housing	Blade
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

52" Slim

Blade:	14° Pitch, 52" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	19 lbs
Total Power:	30.5 W
Lumens:	1110
LED Power:	11.5 W
CRI:	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE

FR-W2003-52L-MW
 Matte White



52" Slim




ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	19 W	16 W
Airflow	6074 CFM	4158 CFM
Energy Costs*	-	\$5/yr
Efficiency	251 CFM/W	256 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2003-52L-MB
Matte Black

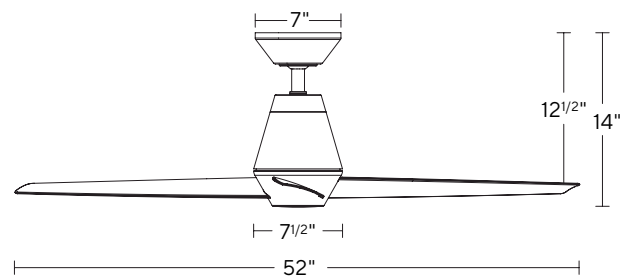





PATENTED

Tip-Top 44" & 52"

Shown: **FH-W2004-52L-MB**

44 inch: FH-W2004-44L

52 inch: FH-W2004-52L



Finish	Housing	Blade
BA	Brushed Aluminum	Weathered Gray
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

44" & 52" Tip-Top

Blade:	14° Pitch, 44" or 52" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	14 / 14.5 lbs
Total Power:	32 / 29W
Lumens:	1110
LED Power:	13 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)*
LED Rated Life:	50,000hrs


*For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL


OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE

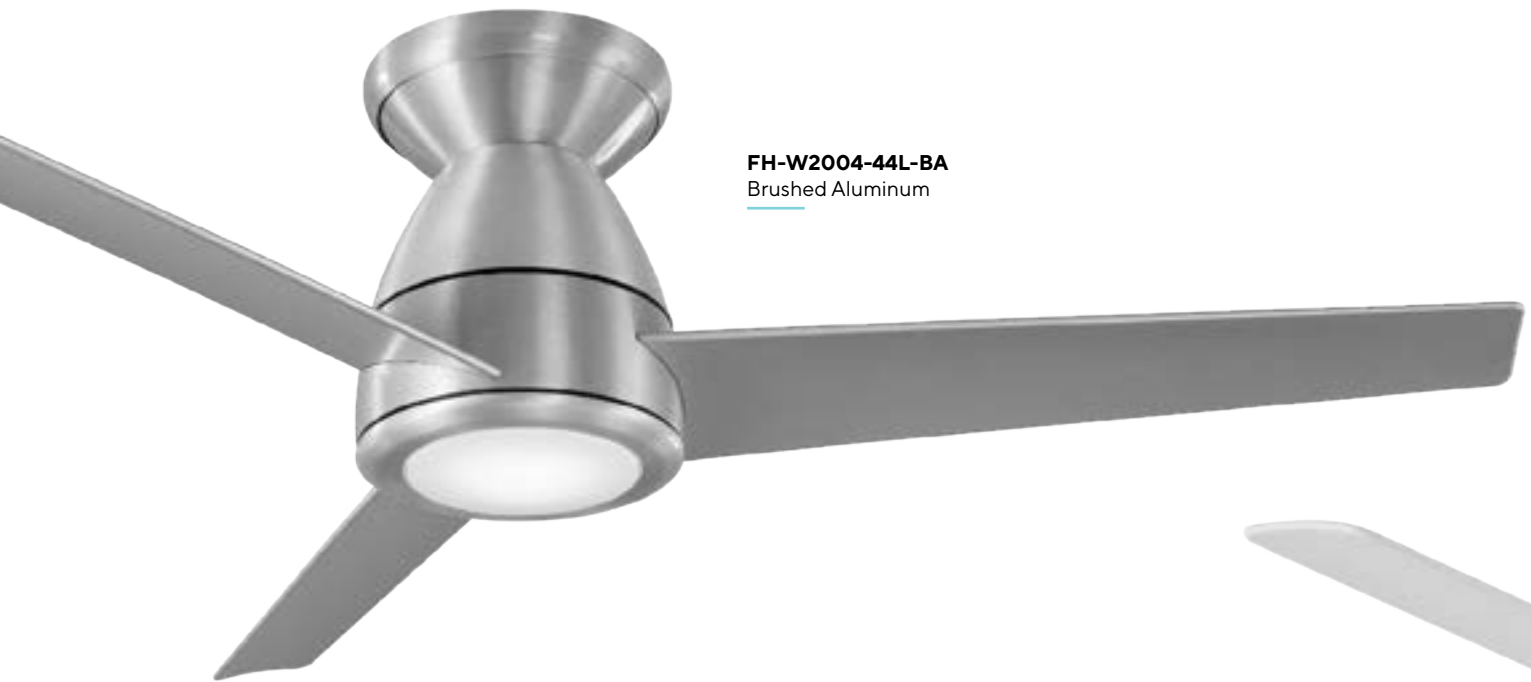

FH-W2004-44L-BA
Brushed Aluminum



FH-W2004-44L-MB
Matte Black


44" Tip-Top



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	16 W	13 W
Airflow	4313 CFM	2798 CFM
Energy Costs*	-	\$4/yr
Efficiency	290 CFM/W	211 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

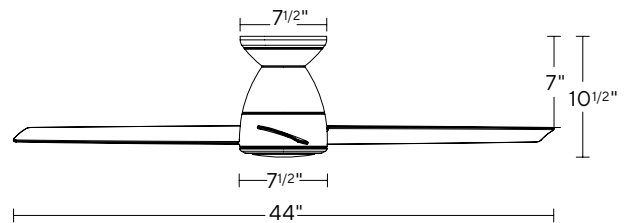



FH-W2004-52L-MW
Matte White


52" Tip-Top



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	19 W	16 W
Airflow	5187 CFM	3491 CFM
Energy Costs*	-	\$4/yr
Efficiency	276 CFM/W	223 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

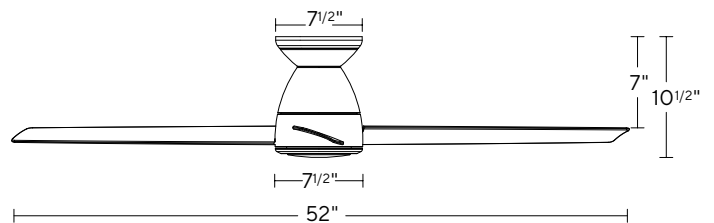





PATENTED

Morpheus 60"

60 inch: FR-W1813-60L



Shown: **FR-W1813-60L-GW**

Finish	Housing	Blade
GB	Gloss Black	Gloss Black
GW	Gloss White	Gloss White

SPECIFICATIONS

60" Morpheus

Blade:	12° Pitch, 60" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	17 lbs
Total Power:	51 W
Lumens:	1600
LED Power:	19.5 W
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF

FR-W1813-60L-GB

Gloss Black

*Shown with included luminaire cover



60" Morpheus



ENERGY GUIDE


Standard	High Speed	Weighted Average
Electricity	22 W	13 W
Airflow	7315 CFM	5027 CFM
Energy Costs*	-	\$4/yr
Efficiency	328 CFM/W	375 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



PATENTED

FR-W1813-60L-GW
Gloss White

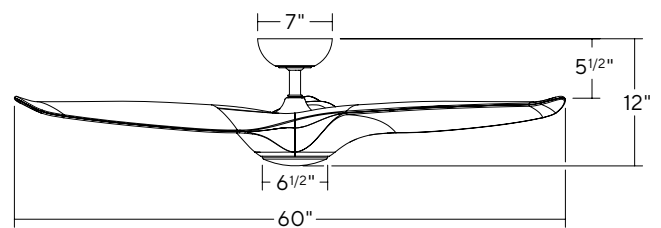





PATENTED

Roboto 52" & 62"

52 inch: FR-W1910-52

62 inch: FR-W1910-62



Shown: **FR-W1910-62-BK**

Finish	Housing	Blade
BA	Brushed Aluminum	Brushed Aluminum
MB	Matte Black	Matte Black
MW	Matte White	Matte White
OB	Oil Rubbed Bronze	Bronze

SPECIFICATIONS

52" & 62" Roboto


Blade:	14° Pitch, 52" or 62" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	19 lbs
Total Power:	39 W

BLUETOOTH REMOTE CONTROL



F-RCBT-WT
Included with each fan
6 speeds
ON/OFF/REVERSE

OPTIONAL BLUETOOTH WALL CONTROL



F-WCBT-WT
Optional with each fan
6 speeds
ON/OFF/REVERSE



FR-W1910-52-BA
Brushed Aluminum



FR-W1910-52-OB
Oil Rubbed Bronze


52" Roboto



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	37.5 W	28 W
Airflow	6026 CFM	4047 CFM
Energy Costs*	-	\$7/yr
Efficiency	160 CFM/W	163 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

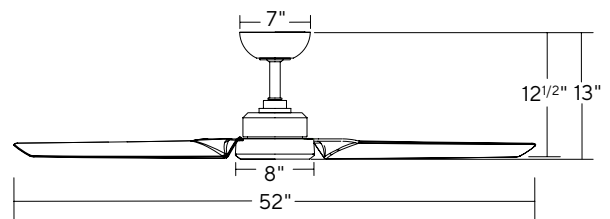



FR-W1910-62-MB
Matte Black



FR-W1910-62-MW
Matte White


62" Roboto



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	39 W	25 W
Airflow	7757 CFM	5612 CFM
Energy Costs*	-	\$7/yr
Efficiency	220 CFM/W	220 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

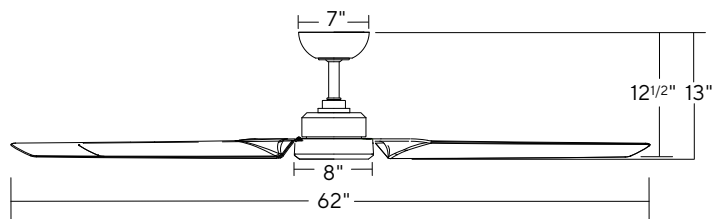





PATENTED

Roboto XL 70"

Shown: **FR-W2301-70L-MB**

70 inch (with Luminaire): **FR-W2301-70L**
70 inch: **FR-W2301-70**



Finish	Housing	Blade
BN	Brushed Nickel*	Silver
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

70" Roboto XL

Blade:	16° Pitch, 70" Sweep, ABS
Downrod:	0.75"ID x 6"H Included
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	30 lbs
Total Power:	45 W

70" Roboto XL (with Luminaire)

Blade:	16° Pitch, 70" Sweep, ABS
Downrod:	0.75"ID x 6"H Included
Mounting Slope:	Up to 30°
Lead Wire:	80"
Hanging Weight:	30 lbs
Total Power:	65 W
Lumens (Luminaire version):	1600
LED Power (Luminaire version):	19.5 W
CRI (Luminaire version):	90
Color Temperature (Luminaire version):	3000K Standard , 2700K/3500K (optional)**
LED Rated Life (Luminaire version):	50,000hrs

*Brushed Nickel is not intended for coastal environments.


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF



F-WCBT-WT
Optional with each fan
6 speeds
Dims light to 1%
ON/OFF



FR-W2301-70-BN
Brushed Nickel

70" Roboto XL



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	45 W	30 W
Airflow	8259 CFM	5612 CFM
Energy Costs*	-	\$8/yr
Efficiency	190 CFM/W	189 CFM/W


* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W2301-70L-MB
Matte Black



FR-W2301-70L-MW
Matte White

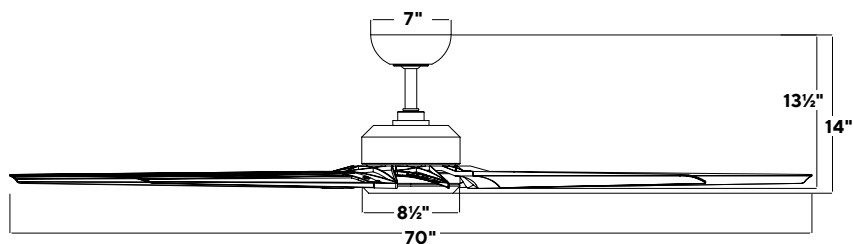





PATENTED

Lotus 54"

Shown: **FR-W1809-54L-MB**

54 inch: **FR-W1809-54L**



Finish	Housing	Blade
BZ	Bronze	Bronze
MB	Matte Black	Matte Black
MW	Matte White	Matte White
TT	Titanium Silver	Titanium Silver

SPECIFICATIONS

54" Lotus

Blade:	14° Pitch, 54" Sweep, ABS
Downrod:	0.75"ID x 4.5"H included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	15 lbs
Total Power:	30 W
Lumens:	1110
LED Power:	13 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Ordered Separately
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



FR-W1809-54L-BZ
Bronze



FR-W1809-54L-MW
Matte White

54" Lotus



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	17 W	15 W
Airflow	6034 CFM	4102 CFM
Energy Costs*	-	\$4/yr
Efficiency	332 CFM/W	278 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.




FR-W1809-54L-TT
Titanium Silver



FR-W1809-54L-MB
Matte Black

*Shown with included luminaire cover

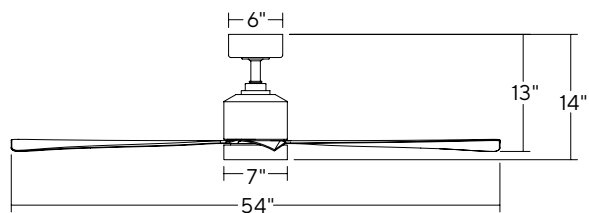





PATENTED

Vox Flush 26" & 38"

Shown: **FH-W1802-38L-MW**

26 inch: FH-W1802-26L

38 inch: FH-W1802-38L



Finish	Housing	Blade
BZ	Bronze	Bronze
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

26" & 38" Vox

Blade:	13° Pitch, 26" or 38" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	16 / 17 lbs
Total Power:	40.5 / 63.5 W
Lumens:	2041
LED Power:	23.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF/REVERSE

FH-W1802-26L-BZ
Bronze



FH-W1802-26L-MW
Matte White


26" Vox Flush



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	17 W	15 W
Airflow	2715 CFM	1624 CFM
Energy Costs*	-	\$15/yr
Efficiency	159 CFM/W	110 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

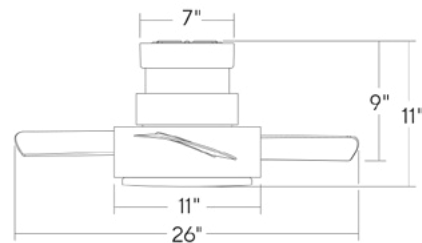



FH-W1802-38L-MW
Matte White



FH-W1802-38L-MB
Matte Black


38" Vox Flush



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	40 W	28 W
Airflow	5327 CFM	3377 CFM
Energy Costs*	-	\$8/yr
Efficiency	133 CFM/W	121 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

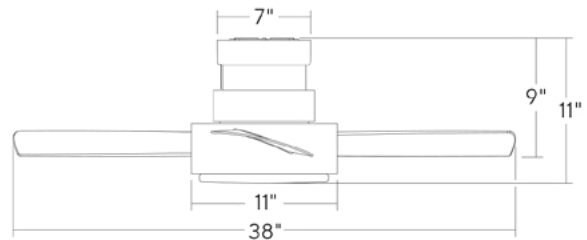





Vox 26" & 38"

Shown: **FR-W1802-38L-MB**

26 inch: FR-W1802-26L

38 inch: FR-W1802-38L



Finish	Housing	Blade
BZ	Bronze	Bronze
MB	Matte Black	Matte Black
MW	Matte White	Matte White

SPECIFICATIONS

26" & 38" Vox

Blade:	14° Pitch, 26" or 38" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	16 / 17 lbs
Total Power:	39.5 / 66.5 W
Lumens:	2041
LED Power:	23.5 W
CRI	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE

OPTIONAL BLUETOOTH WALL CONTROL



F-WCBT-WT
Optional with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



FR-W1802-26L-MB
Matte Black



FR-W1802-26L-MW
Matte White


26" Vox



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	16 W	13 W
Airflow	2677 CFM	1565 CFM
Energy Costs*	-	\$4/yr
Efficiency	103 CFM/W	103 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

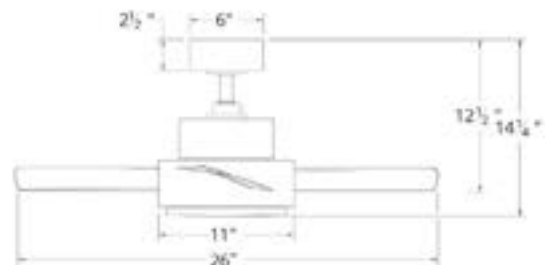



FR-W1802-38L-MW
Matte White



FR-W1802-38L-BZ
Bronze


38" Vox



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	43 W	25 W
Airflow	5357 CFM	3403 CFM
Energy Costs*	-	\$7/yr
Efficiency	138 CFM/W	138 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

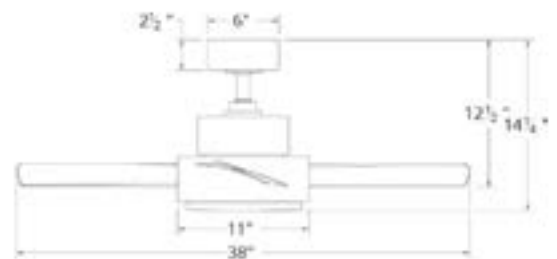





PATENTED

Axis Flush 44" & 52"

44 inch: FH-W1803-44L

52 inch: FH-W1803-52L



Shown: **FH-W1803-44L-MW**

Finish	Housing	Blade
BZ	Bronze	Bronze
MB	Matte Black	Matte Black
MW	Matte White	Matte White
TT	Titanium Silver	Titanium Silver

SPECIFICATIONS

44" & 52" Axis Flush

Blade:	14° Pitch, 44" or 52" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	13 / 14 lbs
Total Power:	36.5 / 49.5 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K standard, 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
 Included with each fan
 6 speeds
 100-0% dimming
 ON/OFF



F-WCBT-WT
 Optional with each fan
 6 speeds
 100-0% dimming
 ON/OFF



FH-W1803-44L-MW
Matte White



FH-W1803-44L-BZ
Bronze


44" Axis Flush



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	17 W	14 W
Airflow	3811 CFM	2321 CFM
Energy Costs*	-	\$4/yr
Efficiency	219 CFM/W	47 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

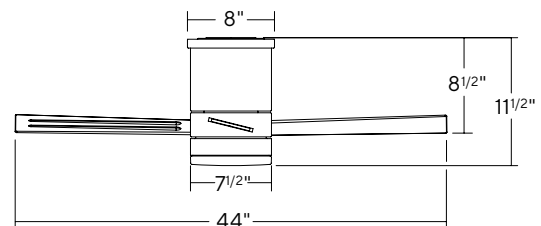



FH-W1803-52L-MB
Matte Black



FH-W1803-52L-TT
Titanium Silver

*Shown with included luminaire cover


52" Axis Flush



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	30 W	22 W
Airflow	5187 CFM	3588 CFM
Energy Costs*	-	\$6/yr
Efficiency	163 CFM/W	133 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

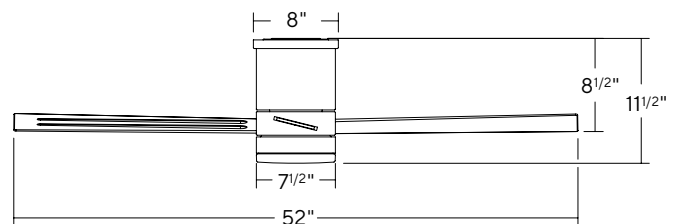





PATENTED

Axis 44" & 52"

Shown: **FR-W1803-52L-MB**

44 inch: **FR-W1803-44L**

52 inch: **FR-W1803-52L**



Finish	Housing	Blade
BZ	Bronze	Bronze
MB	Matte Black	Matte Black
MW	Matte White	Matte White
TT	Titanium Silver	Titanium Silver

SPECIFICATIONS

44" & 52" Axis

Blade:	14° Pitch, 44" or 52" Sweep, ABS
Downrod:	0.75"ID x 4.5"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	13.5 / 15 lbs
Total Power:	35.5 / 48.5 W
Lumens:	1600
LED Power:	19.5 W
CRI	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire

**For 2700K or 3500K add -27 or -35 to the model number


BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT

Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-WCBT-WT

Optional with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE

FR-W1803-44L-BZ
Bronze



FR-W1803-44L-MW
Matte White




44" Axis



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	16 W	14 W
Airflow	3950 CFM	2389 CFM
Energy Costs*	-	\$4/yr
Efficiency	173 CFM/W	63 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

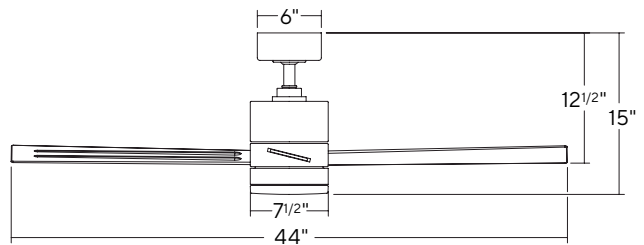



FR-W1803-52L-TT
Titanium Silver



FR-W1803-52L-MB
Matte Black

*Shown with included luminaire cover


52" Axis



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	29 W	21 W
Airflow	5695 CFM	3898 CFM
Energy Costs*	-	\$6/yr
Efficiency	198 CFM/W	185 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

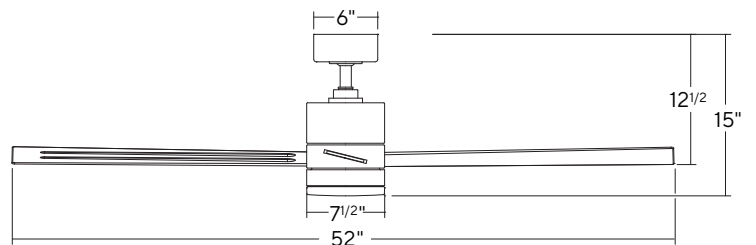





PATENTED

Corona 44" & 52"

Shown: **FH-W2203-44L-SB/MB**

44 inch: FH-W2203-44L
52 inch: FH-W2203-52L



Finish	Housing/Trim	Blade
MB	Matte Black	Matte Black
BN/MB	Matte Black /Brushed Nickel*	Matte Black
SB/MB	Matte Black/Soft Brass*	Matte Black
MW	Matte White	Matte White
BN/MW	Matte White/Brushed Nickel*	Matte White
SB/MW	Matte White/Soft Brass*	Matte White

SPECIFICATIONS

44" & 52" Corona

Blade:	16° Pitch, 44"/52" Sweep, ABS
Lead Wire:	8"
Hanging Weight:	15 / 16 lbs
Total Power:	49 W
Lumens:	1600
LED Power:	19.5 W
CRI:	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*Brushed Nickel and Soft Brass are not intended for coastal environments.


**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH REMOTE CONTROL

OPTIONAL BLUETOOTH WALL CONTROL



F-RCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF



F-WCBT-WT
Optional with each fan
6 speeds
100-0% dimming
ON/OFF

*Applies to 44" & 52"



FH-W2203-44L-MB
Matte Black



FH-W2203-44L-MW
Matte White


44" Corona



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	29 W	21 W
Airflow	4543 CFM	2790 CFM
Energy Costs*	-	\$6/yr
Efficiency	134 CFM/W	124 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

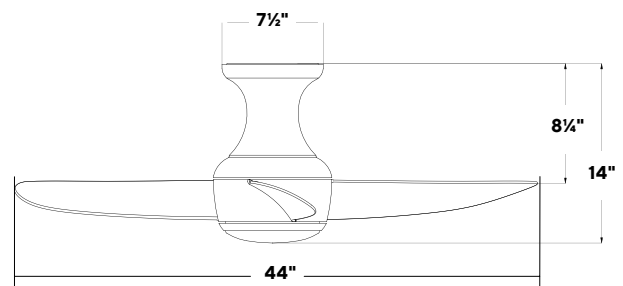



FH-W2203-52L-SB/MW
Matte White/Soft Brass/Matte White



FH-W2203-52L-BN/MB
Matte Black/Brushed Nickel/Matte Black


52" Corona



ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	29 W	20 W
Airflow	5548 CFM	3537 CFM
Energy Costs*	-	\$6/yr
Efficiency	174 CFM/W	164 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

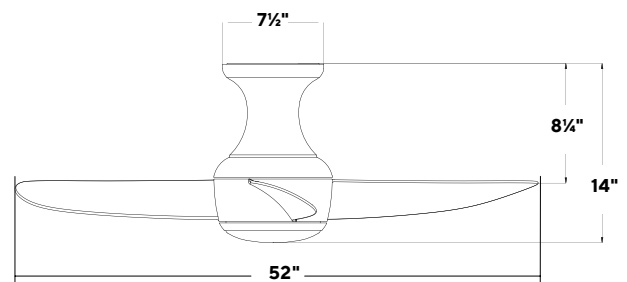





PATENTED

Hydra 80", 96" & 120"

80 inch: FR-W1805-80L
96 inch: FR-W1805-96L
120 inch: FR-W1805-120L

Shown: **FR-W1805-80L-TT**

Finish	Housing	Blade
MB	Matte Black	Matte Black
TT	Titanium Silver	Matte White

SPECIFICATIONS

80", 96" & 120" Hydra


Blade:	14° Pitch, 80",96" or 120" Sweep, ABS
Downrod:	0.75"ID x 6"H Included
Mounting Slope:	Up to 30° standard, 45° (optional)
Lead Wire:	80"
Hanging Weight:	39, 41.5, or 46 lbs
Total Power:	65.5, 68.5, 71.5 W
Lumens:	2041
LED Power:	23.5 W
CRI:	90
Color Temperature:	3000K Standard , 2700K/3500K (optional)**
LED Rated Life:	50,000hrs

*A finished cover is included when not using the luminaire

**For 2700K or 3500K add -27 or -35 to the model number

BLUETOOTH WALL CONTROL

OPTIONAL BLUETOOTH REMOTE CONTROL



F-WCBT-WT
Included with each fan
6 speeds
100-0% dimming
ON/OFF/REVERSE



F-RCBT-WT
Ordered Separately
6 speeds
100-0% dimming
ON/OFF/REVERSE



FR-W1805-80L-MB
Matte Black



FR-W1805-80L-TT
Titanium Silver


*Shown with included luminaire cover

80" Hydra

ENERGY GUIDE

	High Speed	Weighted Average
Standard Electricity	42 W	29 W
Airflow	11308 CFM	7388 CFM
Energy Costs*	-	\$9/yr
Efficiency	271 CFM/W	253 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

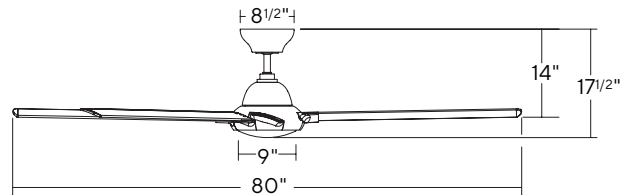



FR-W1805-96L-TT
Titanium Silver



FR-W1805-96L-MB
Matte Black

*Shown with included luminaire cover




96" Hydra

ENERGY GUIDE

Standard	High Speed	Weighted Average
Electricity	42 W	26 W
Airflow	12950 CFM	9125 CFM
Energy Costs*	-	\$9/yr
Efficiency	288 CFM/W	351 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.

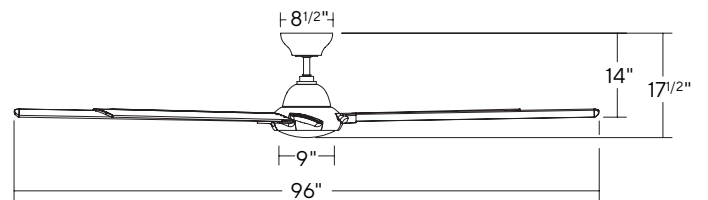



FR-W1805-120L-MB
Matte Black



120" Hydra

ENERGY GUIDE


Standard	High Speed	Weighted Average
Electricity	44 W	26 W
Airflow	13300 CFM	9898 CFM
Energy Costs*	-	\$28/yr
Efficiency	302 CFM/W	388 CFM/W

* Estimated annual energy cost based on \$0.12 per kWh and 6.4 hours use per day.



FR-W1805-120L-TT
Titanium Silver

*Shown with included
luminaire cover

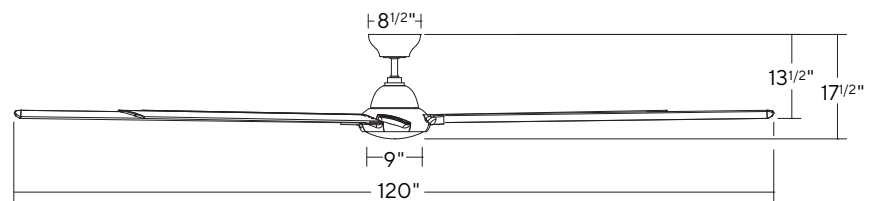

Accessories

Bluetooth Remote Control



F-RCBT-WT

6 fan speeds
100-0% dimming
ON/OFF/REVERSE

UV Bluetooth Remote Control



F-RCUV-WT

6 fan speeds
ON/OFF/REVERSE

*Only compatible with Ultra (FR-D2102-54U)




Bluetooth Wall Control



F-WCBT-WT

6 fan speeds
Dims light to 1%
ON/OFF/REVERSE

Downrod and Cap Couplers

<p>Downrod</p> 	<p>XF-12 12in</p> <p>XF-18 18in</p> <p>XF-24 24in</p> <p>XF-36 36in</p>	<p>XF-48 48in</p> <p>XF-60 60in</p> <p>XF-72 72in</p>	<p>All our downrods are 0.75" I.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.</p>	<p>UV Replacement Module</p> 	<p>UVF7IN-120V-R1-MOD</p> <p>*Only compatible with Ultra (FR-D2102-54U)</p>
<p>Downrod Couplers</p> 	<p>XF-1</p>	<p>Connects two downrods together</p>			

Example: **XF-18-TT**

AS Automotive Silver	DK Distressed Koa	MB Matte Black	SS Stainless Steel
BA Brushed Aluminum	GB Gloss Black	MW Matte White	ST Steel
BN Brushed Nickel*	GH Graphite	OB Oil Rubbed Bronze	TT Titanium Silver
BZ Bronze	GW Gloss White	SB Soft Brass*	

*Brushed Nickel and Soft Brass are not intended for coastal environments.

Suggested Downrod Height Usage

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

Sloped Ceiling Kit Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch

Sloped Ceiling Kit



XF-SCK

AS Automotive Silver	MB Matte Black
BA Brushed Aluminum	MW Matte White
BN Brushed Nickel*	OB Oil Rubbed Bronze
BZ Bronze	SB Soft Brass*
DK Distressed Koa	SS Stainless Steel
GB Gloss Black	ST Steel
GH Graphite	TT Titanium Silver
GW Gloss White	

Example: **XF-SCK-TT**

Sloped Ceiling Degree Conversion Chart

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope Pitch	1/12 Pitch	2/12 Pitch	3/12 Pitch	4/12 Pitch	5/12 Pitch	6/12 Pitch	7/12 Pitch	8/12 Pitch	9/12 Pitch	10/12 Pitch	11/12 Pitch	12/12 Pitch

Professional Assets

LOCAL & GLOBAL CONTROL: THE WI-FI and BLUETOOTH STORY

With the Bluetooth remote or wall control, you can control an unlimited number of fans within single range - one, five, twenty five. With Wi-Fi, the app can control a virtually unlimited number of fans - one, twenty, two hundred... From anywhere around the world.

Best of Both Worlds:

The remote or wall control may be used in conjunction with the Modern Forms app if desired, to have both local and global control.

Form a Group:

Create groups of fans to make scheduling more efficient. Organize them by room type, floor number, location or style. Copy schedules from one group to another.

Plays Well with Others:

The Modern Forms app ties into other building control systems such as Control 4 and Samsung SmartThings.

Bluetooth:

A Bluetooth enabled remote or wall control is supplied with every new Modern Forms Smart Fan. For instantenous control, Bluetooth is best. Powerful enough to pass through walls and doesn't require line of sight as required by IR.

Local Control:

The Bluetooth remote or wall control makes it convenient to operate your fans locally without relying on Wi-Fi or Internet access to connect with a cloud.

Synchronized Spinning :

Problem-free installation and operation of multiple fans in a series. Hold the button on the remote to set all fans in a group to the same setting.

No Plan? No Problem:

Control one or all of the fans in a room with any number of remote or wall controls without the need for complicated 3-way or 4-way wiring.

By Invitation Only :

Invite users to control fans via the app - They can customize their own schedules temporarily while you maintain master control.

Go Big or Go Home :

Modern Forms DC motors provide the torque necessary to quietly and efficiently power the largest designer fans on the market with superior CFM rating for air movement.

Sensorless DC motors :

Proprietary technologies were developed to control DC motors without the need for optical sensors, which have shorter lifespans.

ILLUMUNATING EXPERIENCES:

Ceiling fans are commonly the only light source in a room. The luminaires within Modern Forms Smart Fans were custom designed to accommodate each unique fan to provide the maximum amount of usable illumination. Each luminaire incorporates WAC's proprietary dimming and control technology for smooth and continuous full-spectrum dimming from 100% to 1%. Available in 2700K, 3000K and 3500K color temperature modes.

Entire Line of Modern Forms Smart Fans

Size	Model	Name	Page	Finishes	Wet Listing	Luminaire	CFM
26"	FR-W1802-26L	VOX	132	BZ, MB, MW	YES	YES	2677
38"	FR-W1802-38L	VOX	132	BZ, MB, MW	YES	YES	5357
26"	FH-W1802-26L	VOX FLUSH	128	BZ, MB, MW	YES	YES	2715
38"	FH-W1802-38L	VOX FLUSH	128	BZ, MB, MW	YES	YES	5327
42"	FR-W1801-42L	WYND	86	BZ, GH/WG, MB, MW, SS	YES	YES	4981
44"	FR-W1803-44L	AXIS	140	BZ, MB, MW, TT	YES	YES	3950
44"	FH-W1803-44L	AXIS FLUSH	136	BZ, MB, MW, TT	YES	YES	3811
44"	FR-W2004-44L	TIP-TOP	108	BA, MB, MW	YES	YES	4313
44"	FH-W2203-44L	CORONA	140	MB, BN/MB, SB/MB MW, BN/MW, SB/MW	YES	YES	4543
52"	FR-W1803-52L	AXIS	140	BZ, MB, MW, TT	YES	YES	5695
52"	FH-W1803-52L	AXIS FLUSH	136	BZ, MB, MW, TT	YES	YES	5187
52"	FR-W1819-52L	MYKONOS	78	BZ/DW, MB, MW, OB/BW	YES	YES	6001
52"	FR-W2001-52L	RENEGADE	58	GH/WW, MB, OB/BW, BN/MB	YES	YES	7445
52"	FR-W1910-52	ROBOTO	116	BA, MB, MW, OB	YES	NO	6074
52"	FR-W2003-52L	SLIM	104	MB, MW	YES	YES	6074
52"	FH-W2003-52L	SLIM FLUSH	100	MB, MW	YES	YES	5891
52"	FH-W2004-52L	TIP-TOP	108	BA, MB, MW	YES	YES	5187
52"	FH-W2203-52L	CORONA	144	MB, BN/MB, SB/MB, MW, BN/MW, SB/MW	YES	YES	5548
52"	FR-W1801-52L	WYND	86	BZ, GH/WG, MB, MW, SS	YES	YES	6270
52"	FR-W2006-52L	ZEPHYR	34	GH/WW, MB, MB/DK, MW	YES	YES	4655
54"	FR-D2102-54U	ULTRA SMART FAN	10	BN/MB, MB, MW	DAMP	NO	5172
54"	FR-W1811-54	AVIATOR	46	GH/WG, MB, MB/DK	YES	OPTIONAL	7074
54"	FH-W1811-54	AVIATOR FLUSH	38	GH/WG, MB, MB/DK	YES	OPTIONAL	6321
54"	FR-W1811-5	AVIATOR 5	50	GH/WG, MB, MB/DK	YES	OPTIONAL	8418
54"	FH-W1811-5	AVIATOR 5 FLUSH	42	GH/WG, MB, MB/DK	YES	OPTIONAL	7822
54"	FH-W2202-54L	SKYLARK FLUSH	26	BN/EB, SB/MB, SB/MW, MB	YES	YES	5842
54"	FR-W2202-54L	SKYLARK	30	BN/EB, SB/MB, SB/MW, MB	YES	YES	6041
54"	FR-W1809-54L	LOTUS	124	BZ, MB, MB, TT	YES	YES	6034
56"	FR-W1806-56L	CERVANTES	54	MB/BW, OB/DW	YES	YES	6577
56"	FR-W1817-56L	OSPREY	70	MB/DW, OB/DW	YES	YES	6160
58"	FR-W2204-58	TORQUE	14	BN/EB, MB, MB/DK, SB/MB, SB/MW	YES	NO	5765
60"	FR-W1813-60L	MORPHEUS	112	GB, GW	YES	YES	7315
60"	FR-W2008-60L	MYKONOS 5	82	BZ/DW, GH/WW, MB, MW, OB/BW	YES	YES	6970
60"	FR-W1810-60	VORTEX	96	AS, GB, GW	YES	NO	7663
60"	FR-W1815-60L	WINDFLOWER	74	GH/WG, MB/DK, OB/DW	YES	YES	8458
60"	FR-W1814-60L	WOODY	66	BZ/DW, GH/WG, MB/DK	YES	YES	7306
60"	FR-W1801-60L	WYND	86	BZ, GH/WG, MB, MW, SS	YES	YES	7516
62"	FR-W2202-62L	SKYLARK	30	BN/EB, MB, SB/MB, SB/MW	YES	YES	6920

Entire Line of Modern Forms Smart Fans

Size	Model	Name	Page	Finishes	Wet Listing	Luminaire	CFM
62"	FR-W2304-62L	LUCID	22	SB/MB, SB,MW	YES	YES	6963
62"	FR-W1910-62	ROBOTO	116	BA, MB, MW, OB	YES	NO	7757
62"	FR-W2006-62L	ZEPHYR	34	GH/WW, MB, MB/DK, MW	YES	YES	6272
65"	FR-W2201-65L	WYNDMILL	62	MB/BW, MB, ST/WW	YES	YES	9505
66"	FR-W2001-66L	RENEGADE	58	GH/WW, MB, OB/BW, BN/MB	YES	YES	10146
70"	FR-W1811-70	AVIATOR 5	50	GH/WG, MB, MB/DK	YES	OPTIONAL	11624
70"	FR-W2301-70	ROBOTO XL	120	BN, MB, MW	YES	NO	8259
70"	FR-W2301-70L	ROBOTO XL	120	BN, MB, MW	YES	YES	8259
70"	FR-W2204-70	TORQUE	14	BN/EB, MB, MB/DK, SB/MB, SB/MW	YES	NO	8581
72"	FR-W2303-72L	AURA	18	BN/MB, SB/MB, SB/MW	YES	YES	8821
72"	FR-W2101-72L	WYND XL	92	BZ, MB, MW, SS	YES	YES	11926
80"	FR-W1805-80L	HYDRA	148	MB, TT	YES	YES	11308
80"	FR-W1815-80L	WINDFLOWER	74	GH/WG, MB/DK	YES	YES	10648
96"	FR-W1805-96L	HYDRA	148	MB, TT	YES	YES	12950
120"	FR-W1805-120L	HYDRA	148	MB, TT	YES	YES	13300

Alphabetical Index

Aura.....	18	Skylark 54*.....	30
Aviator.....	46	Skylark 62.....	30
Aviator Flush.....	38	Skylark Flush.....	26
Aviator 5.....	50	Slim.....	104
Aviator 5 Flush.....	42	Slim Flush.....	100
Axis.....	140	Tip-Top Flush.....	108
Axis Flush.....	136	Torque 58.....	14
Cervantes.....	54	Torque 70.....	14
Corona.....	144	Ultra Smart Fan.....	10
Hyrda.....	148	Vox.....	132
Lucid.....	22	VoxFlush*.....	128
Lotus.....	124	Vortex.....	96
Morpheus.....	112	Windflower.....	74
Mykonos.....	78	Woody.....	66
Mykonos 5.....	82	Wynd.....	86
Osprey.....	70	Wynd XL.....	92
Renegade.....	58	Wyndmill.....	62
Roboto.....	116	Zephyr.....	34
Roboto XL.....	120		

* New models for 2023 * New finishes for 2023

Model Number Guide

Example: **FR-W2001-66L-GH/WW**



FR = Ceiling Fan **W** = Wet Listed **Model** **Sweep Size** **L** = Luminaire included **Housing Finish / Blade Finish**

Code	AS	BA	BN	BW	BZ	DK	EB	GB	GH	GW	MB	OB	SB	SS	ST	TT	WG	WW
Finish	Automotive Silver	Brushed Aluminum	Brushed Nickel	Bam Wood	Bronze	Distressed Koa	Ebony	Gloss Black	Graphite	Gloss White	Matte Black	Oil Rubbed Bronze	Soft Brass	Stainless Steel	Steel	Titanium Silver	Weathered Gray	Weathered Wood

Want more from your fan?

SMART HOME

Integration made simple.



Download the Modern Forms Smart Fans App from the Apple App Store or Google Play Store.



Headquarters

Tel: 800.526.2588

Fax: 800.526.2585

44 Harbor Park Dr
Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway
Suite 100
Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave
Ontario, CA 91761

Consult our manufacturing facility to take advantage of our custom capabilities
in large quantities. For up to date product specifications and assistance
please visit modernforms.com

or call:

1-866-810-6615



MODERN FORMS

We retain the right to modify the design of our product at any time as part of the company's continuous improvement program. Please refer to our website for the latest product specifications.

This catalog includes many patented and patent-pending products or features. We will not hesitate to enforce our intellectual property rights through injunctive relief and seek further relief through damages if we have reason to believe the patents are being infringed.

Copyright © 2023. All rights reserved. This catalog is copyrighted. We will use all measures available to us under the law against anyone who copies or derives from our copyrighted work.

MODERNFORMS.COM