VISUAL COMFORT & CO.

LANDSCAPE COLLECTION

Our story has always been about the transformative power of lighting—how it illuminates, elevates, and brings spaces to life. At Visual Comfort & Co., we create lighting that inspires, blending design and creativity, craft and technology, style and performance to enrich every space, both indoors and out.

LANDSCAPE COLLECTION

Our Landscape Collection honors the natural beauty of outdoor spaces with timeless design and premium materials. Crafted with precision and intention, these fixtures seamlessly integrate into gardens, patios, and walkways, bringing warmth, connection, and refinement. By balancing form and function, we transform the outdoors into true extensions of the home.

We believe lighting is more than an accessory—it is the defining element of design. Our mission is to illuminate every environment with intention and brilliance, meeting the highest standards of style, quality, and performance.



- 4 PRODUCT INDEX
- **10** FEATURES & BENEFITS
- 28 DIRECTIONAL
- **44** PATH & AREA
- **70** IN-GRADE
- 110 HARDSCAPE
- 118 STEP LIGHTS
- 136 WALL & POST MOUNT
- **146** FLUSH MOUNT
- **152** ACCESSORIES

CONTENTS

DIRECTIONAL LIGHTING



CORA MR11 LED

PG: 30 - 31



CORA 50° SHROUD

MR11 LED

PG: 32 - 33



MESA Integrated Led

PG: 34 - 35



SIERRA MR16 LED

PG: 36 - 37



SIERRA 50° SHROUD

MR16 LED

PG: 38 - 39



TULE
INTEGRATED LED

PG: 40 - 41



TULE 50 $^{\circ}$ SHROUD

INTEGRATED LED

PG: 42 - 43









IN-GRADE LIGHTING



DELPHINI MICRO FIXED
WITH FLANGE

INTEGRATED LED PG: 72 - 73



SHAVER 16 FIXED WITH SHROUD

MR16 LED PG: 82 - 83



SHAVER 11 FIXED 90° APERTURE

MR11 LED PG: 92 - 93



SHAVER 16 FIXED 270° APERTURE

MR16 LED PG: 102 - 103



SHAVER 16 FIXED OPEN FLAT

MR16 LED PG: **74 - 75**



SHAVER 11 FIXED WITH SHROUD

MR11 LED PG: 84 - 85



SHAVER 16 FIXED OPPOSITE 90° APERTURE

MR16 LED PG: 94 - 95



SHAVER 11 FIXED 270° APERTURE

MR11 LED PG: 104 - 105



SHAVER 11 FIXED OPEN FLAT

MR11 LED PG: 76 - 77



SHAVER 16 FIXED WITH GRILL GUARD

MR16 LED PG: 86 - 87



SHAVER 11 FIXED OPPOSITE 90° APERTURE

MR11 LED PG: 96 - 97



SHAVER 16 FIXED 360° APERTURE

MR16 LED PG: 106 - 107



SHAVER 16 FIXED OPEN IN-GRADE

MR16 LED PG: 78 - 79

SHAVER 11 FIXED

WITH GRILL GUARD

MR11 LED

PG: 88 - 89

SHAVER 16 FIXED

180° APERTURE

MR16 LED

PG: 98 - 99



SHAVER 11 FIXED OPEN IN-GRADE

MR11 LED PG: 80 - 81



SHAVER 16 FIXED 90° APERTURE

MR16 LED **PG: 90 - 91**



SHAVER 11 FIXED 180° APERTURE

MR11 LED PG: 100 - 101



SHAVER 11 FIXED 360° APERTURE

MR11 LED PG: 108 - 109



BROOKS 6"
INTEGRATED LED

PG: 112 - 113



BROOKS 12"
INTEGRATED LED

PG: 114 - 115



BROOKS 18"

INTEGRATED LED

PG: 116 - 117

STEP LIGHTING



KAIDAN SQUARE APERTURE

12V / 120V

PG: 120 - 123



KAIDAN HEX APERTURE

12V / 120V

PG: 124 - 127



KAIDAN ROUND APERTURE

12V / 120V

PG: 128 - 131



KAIDAN TRIANGLE APERTURE

12V / 120V

PG: 132 - 135

WALL & POST MOUNT LIGHTING



SENTINEL SHALLOW

G4 LED

PG: 138 - 139



SENTINEL DEEP

G4 LED

PG: 140 - 141



BALSAM

G4 LED

PG: 142 - 143



PLATEAU WIDE

G4 LED

PG: 144 - 145

FLUSH MOUNT LIGHTING



MAXSON SQUARE

MR16 LED

PG: 148 - 149



MAXSON ROUND

MR16 LED

PG: 150 - 151

MOUNTING OPTIONS



HEAVY-DUTY STAKE

PG: 155



12" TRIDENT STAKE

PG: 156



ARBOR TREE MOUNT SCREW-IN

PG: 157



ARBOR TREE & SURFACE MOUNT

PG: 158



ARBOR BUNGEE STRAP

PG: 159



ARBOR GUTTER MOUNT

PG: 160



DECK/SURFACE MOUNT

PG: 161



FEATURES & BENEFITS



LIVING FINISHES

PATINA

Our landscape lighting products celebrate the inherent beauty of brass and copper—materials chosen not only for their performance but for their ability to age gracefully. To achieve a bronze finish, we expertly age the brass, allowing each fixture to develop a rich, unique patina over time. This natural evolution blends authentic design with enduring craftsmanship, creating lighting that becomes more beautiful with every passing season.









BALSAM IN BRONZE

With its deep, rich tones, bronze finish ages gracefully, developing a distinctive patina that adds depth and character to outdoor spaces.







PEAK IN HAND-RUBBED ANTIQUE BRASS

This warm, golden finish is carefully hand-rubbed to perfection, evolving over time into a lustrous patina that exudes timeless elegance.







ASCEND IN COPPER

Naturally radiant and versatile, natural copper matures with a striking patina that enhances its charm and complements any landscape.

NATURAL MATERIAL

Our landscape lighting products feature the natural beauty of travertine, available in dark and natural tones. Its unique texture and color variations add depth and character to outdoor spaces. Durable and versatile, travertine complements a range of landscape designs with a clean, natural look.















DARK TRAVERTINE

LIGHT TRAVERTINE

BUILT TO LAST

DIRECTIONAL SERIES

Engineered for versatility, the Cora and Sierra series are ideal for floodlighting, moonlighting, grazing, and accentuating architectural features and landscapes.

Designed for dependable performance and effortless maintenance, it brings a refined



SIERRA DIRECTIONAL SPOT WITH 50° CUT-OFF SHROUD

Protects the internal components by preventing water and debris accumulation. The shrouded version features a slight angle to ensure effective drainage.

Ensures the lamp remains perfectly aligned with the fixture aperture while securely holding any optional lenses in place with a coil spring.

Ensures a secure, reliable connection with the MR bi-pin lamp using spring-backed electrical contacts. Features a field-replaceable socket assembly for easy maintenance.

Offers IP65-rated protection, shielding the lamp and socket from dust and moisture.

Designed for precision and durability, this adjustable mechanism offers a smooth, stable angling range—extending up to 117 degrees for perfectly directed illumination.

IN-GRADE WELL LIGHTS SERIES

Crafted for seamless integration, the Delphini and Shaver series deliver discreet, low-profile illumination that enhances both turf and hardscape areas. Designed with precision and durability, these fixtures provide reliable performance while adding a touch of luxury to outdoor spaces.



BRASS OR COPPER FORGED MATERIAL

Built from premium materials for exceptional durability and timeless elegance.

COIL SPRING WITH LAMP-CENTERING RING

The coil spring ensures precise lamp alignment and secures optional lenses for optimal performance.

CERAMIC BI-PIN SOCKET

Features spring-backed electrical contacts for a tight, secure connection to the MR bi-pin lamp while allowing for easy field replacement.

FULLY SEALED ASSEMBLY

Provides robust protection against moisture and debris, ensuring long-lasting reliability.



SHAVER 16 FIXED 180° APERTURE

BUILT TO LAST

ACADIA EDGE

This elegantly crafted pathway light offers exceptional durability with a sleek, modern design. Engineered with an integrated LED module, it provides effective forward-throw light distribution while minimizing light spill. Its robust construction ensures lasting performance, making it an ideal choice for illuminating walkways with precision.



ACADIA EDGE

this pathway light ensures easy maintenance and long-lasting performance, allowing for quick updates or repairs without compromising its elegant design.



ADJUSTABILITY

AESTHETIC CONTROL

Our directional lights offer superior adjustability, with heads that rotate up to 234 degrees (+/- 117°) for precise illumination. Designed for both installers and end users, the pivot mechanism features a secure locking system, ensuring stability and flexibility. This system expands downlighting capabilities from elevated surfaces.





THUMB SCREW
Easily adjustable with no tools required, ensuring quick and secure installation.



COUNTERSUNK SCREW

For professional installations, this optional feature replaces the standard thumb screw with an included socket head screw, maintaining a clean, streamlined aesthetic while ensuring secure mounting.



INTERLOCK MECHANISM

Our directional lights feature a precision-engineered rotation mechanism with cast notches for superior durability and wear resistance. Designed for longevity, it also includes a threaded stud that can be easily replaced in the field.



PAINTED SURFACE

INNER-WHITE DOME

Our pathway light shades are painted white on the inside to increase light reflection, ensuring maximum efficiency and uniform illumination.

BALSAM







PEAK













CRAFTED LUMINESCENCE

FLUTED GLASS

Fluted glass diffuses light to create a soft, even glow, while adding protection and enhancing visual comfort.

CUT-OFF REFLECTOR

Designed to redirect light precisely where needed, the cut-off reflector helps control light distribution and reduce light pollution ensuring targeted and efficient illumination. This accessory is ideal for illuminating pathways while preventing unwanted light spill onto surrounding areas.







GLARE CONTROL

HEX LOUVER

Hex louvers, available in a variety of sizes and shapes to fit different fixtures, are designed to reduce glare for a more comfortable and defined illumination.



TULE MICRO DIRECTIONAL SPOT



TULE HEX LOUVER



CORA DIRECTIONAL SPOT LIGHT



MR11 ROUND HEX LOUVER



SIERRA DIRECTIONAL SPOT LIGHT



MR16 ROUND HEX LOUVER



SHAVER 11 FIXED OPEN FLAT



MR11 ROUND IN-GRADE HEX LOUVER



SHAVER 16 FIXED OPEN FLAT



MR16 ROUND IN-GRADE HEX LOUVER



MAXSON SQUARE FLUSH MOUNT



MR16 SQUARE HEX LOUVER





OPTICAL LENS FILTER

COLOR LENSES

Acrylic-colored lenses, available in red, green, and

blue, offer a creative way to enhance landscape lighting.

These filters add depth and mood to outdoor spaces,

highlighting natural elements with vibrant, dynamic effects.



RED LENS

The red lens adds warmth and intensity, accentuating deep hues in foliage like crimson leaves or rich earthy tones. It's ideal for emphasizing warm color palettes in late summer or autumn landscapes, creating a striking and dramatic effect.



RED LENS ON RED MAPLE



GREEN LENS

The green lens enhances the vibrancy of natural greens, making it ideal for highlighting lush foliage, ground cover, and garden beds. It's especially effective in spring and summer when landscapes are at their most verdant and alive.



GREEN LENS ON EVERGREEN



BLUE LENS

The blue lens creates a cool, soothing glow, perfect for illuminating water features or accentuating silvery tones in plants like blue spruces or sage. It works beautifully in summer to evoke a tranquil and refreshing atmosphere.



BLUE LENS ON BLUE SPRUCE

LENS DIFFUSERS

Lens diffusers are essential for landscape lighting, offering control and customization of light distribution.

By softening, focusing, or spreading light, they allow for tailored beams that enhance outdoor spaces, reduce glare, and highlight specific features with precision.



DIFFUSER SPREAD LENS

The diffuser spread lens softens and broadens light output, ideal for evenly illuminating larger areas like garden beds, walkways, or low-level foliage.



LINEAR SPREAD LENS

The linear spread lens creates an elongated beam pattern, making it perfect for lighting pathways, retaining walls, or other linear landscape features with uniform coverage.



SOLITE SOFT FOCUS LENS

The solite soft focus lens delivers a subtle, diffused light that reduces harsh shadows, making it ideal for accenting delicate features like ornamental plants or statues with a gentle glow.



SANDBLASTED LENS

The sandblasted lens provides an even distribution, ideal for achieving a soft, ambient light that is perfect for creating a calming atmosphere around seating areas or patios.

DURABLE INSTALLATION

HEAVY-DUTY STAKE

Premium heavy-duty stake designed for secure, long-lasting fixture installation. It provides a stable foundation to keep lighting perfectly positioned in any landscape. Built with high-quality materials and thoughtful engineering, it offers durability and ease of use.

OVER-MOLDED THREADED BRASS INSERT

Features an over-molded threaded brass insert for a strong and secure connection, ensuring your fixture stays firmly in place.

REINFORCED SURFACES

Reinforced surfaces add strength and durability, enabling the stake to withstand various ground conditions while maintaining stability.

SLOTTED DESIGN

The slotted design allows the cord to exit through the side, simplifying installation and protecting the wiring for long-term reliability.

STABLE 13" LENGTH

With a stable 13" overall length, the stake ensures deep, secure placement in the ground, providing enhanced support and preventing shifting over time.





SIERRA DIRECTIONAL SPOT WITH 50° CUT-OFF SHROUD AND HEAVY-DUTY STAKE

SIERRA DIRECTIONAL SPOT WITH 50° CUT-OFF SHROUD & ARBOR TREE MOUNT SCREW-IN

MOUNTING OPTIONS

ARBOR TREE MOUNT SCREW-IN Arbor tree and surface mounts offer flexible options for illuminating landscapes and trees from elevated positions. By securely attaching fixtures to trunks, branches, or surfaces, these mounts create dynamic lighting effects such as grazing, shadowing and moonlighting. Ideal for highlighting architectural features or casting soft, ambient light over large areas, they provide precision placement with minimal disruption to the surrounding landscape.







ARBOR GUTTER MOUNT



ARBOR TREE & SURFACE MOUNT

DIRECTIONAL LIGHTING



Cora

DIRECTIONAL SPOT

DESIGNER: SEAN LAVIN

The Cora directional spotlight features a sleek cylindrical design with a fully sealed, domed glass lens for water dispersion. Its adjustable and lockable head rotate up to 234 degrees (+/- 117°) for enhanced aiming. Engineered for durability, it includes a field-replaceable ceramic socket assembly and IP65-rated protection, ensuring reliable performance in outdoor environments. Cora is compatible with various mounting accessories to provide installation flexibility.







DIMENSIONS	
Fixture Height	4.7" / 119 mm
Fixture Width	1.8" / 46 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.5 lb
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"
Knuckle	Thumb Screw (Included), Countersunk Screw (Included)
Mounting	Heavy-Duty Stake, Deck/Surface Mount, Arbor Bungee Strap, Arbor Tree & Surface Mount, Arbor Tree Mount Screw-In, Arbor Gutter Mount, 12" Trident Spike
Optical Controls	Hex Louver (Included), Colored Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.



MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



SL668HAB,

SL668BZ,

SL668NC



ARBOR BUNGEE STRAP

SL666BZ, SL666HAB,

SL666NC





ARBOR TREE MOUNT SCREW-IN SL665BZ, SL665HAB,

SL665NC

SL664HAB, SL664NC



HEX LOUVER (INCLUDED)



COLORED LENS



LENS DIFFUSERS SL6106DF, SL6106LL, SL6106SF,

SL6106SB

ARBOR GUTTER MOUNT SL667

12" TRIDENT SPIKE SL6122BZ SL6122HAB, SL6122NC

SL673

SL671BL, SL671GR, SL671RD

ORDERING INFORMATION

PRODUCT		RISER HEIGHT		FINIS	FINISH		LAMP		MOUNTING		LENS	
SL624		NR			BRONZE		NO LAMP		NO MOUNT	–	NO LENS	
	DIRECTIONAL	11	15" RISER (1" DIA.)	HAB	HAND-RUBBED	B5	LED LAMP MR11 3W 36°	M1	HEAVY-DUTY STAKE	BL	BLUE	
	SPOT	12	18" RISER (1" DIA.)		ANTIQUE BRASS		90 CRI 2700K	M2	SURFACE	GR	GREEN	
		13	24" RISER (1" DIA.)	NC	NATURAL COPPER	В6	LED LAMP MR11 3W 60°	M4	BUNGEE	RD	RED	
							90 CRI 2700K	M5	TREE SURFACE	DF	DIFFUSER SPREAD LENS	
								M6	TREE SCREW-IN	LL	LINEAR SPREAD LENS	
								M7	GUTTER MOUNT	SF	SOLITE SOFT FOCUS LENS	
HEX LC	UVER INCLUDED.							M10	12" TRIDENT SPIKE	SB	SANDBLASTED LENS	



Cora

DIRECTIONAL SPOTLIGHT WITH 50° CUT-OFF SHROUD

DESIGNER: SEAN LAVIN

Cora directional spotlight features a sleek cylindrical design with a 50° cut-off shroud, delivering precise, glare-reducing illumination. Its adjustable and lockable head rotate up to 234 degrees (+/- 117°) for enhanced aiming. The unit is IP65-rated ensured by fully sealed dome glass and includes a field-replaceable ceramic socket assembly for reliable performance in outdoor environments. Cora is compatible with various mounting accessories to provide installation flexiblity.







DIMENSIONS



MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659

ARBOR GUTTER MOUNT

SL667



SL668HAB,

12" TRIDENT SPIKE

SL6122BZ,

SL6122NC

SL6122HAB,

SL668BZ,

SL668NC



ARBOR BUNGEE STRAP

SL666BZ,

SL666HAB, SL666NC

HEX LOUVER (INCLUDED)

SL673





ARBOR TREE & SURFACE MOUNT ARBOR TREE MOUNT SCREW-IN

SL664HAB, SL664NC





COLORED LENS





LENS DIFFUSERS

SL6106DF, SL6106LL, SL6106SF, SL6106SB

DIMENSIONS	
Fixture Height	6.2" / 157 mm
Fixture Width	1.8" / 46 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.7 lb
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
сст	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"
Knuckle	Thumb Screw (Included), Countersunk Screw (Included)
Mounting	Heavy-Duty Stake, Deck/Surface Mount, Arbor Bungee Strap, Arbor Tree & Surface Mount, Arbor Tree Mount Screw-In, Arbor Gutter Mount, 12" Trident Spike
Optical Controls	Hex Louver (Included), Colored Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT		RIS	RISER HEIGHT		FINISH		LAMP		MOUNTING		LENS	
SL625	CORA DIRECTIONAL SPOT WITH 50° CUT-OFF SHROUD	NR 11 12 13	NO RISER 15" RISER (1" DIA.) 18" RISER (1" DIA.) 24" RISER (1" DIA.)		BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER		NO LAMP LED LAMP MR11 3W 36° 90 CRI 2700K LED LAMP MR11 3W 60° 90 CRI 2700K	M1 M2	NO MOUNT HEAVY-DUTY STAKE SURFACE BUNGEE TREE SURFACE TREE SCREW-IN	BL GR RD DF	NO LENS BLUE GREEN RED DIFFUSER SPREAD LENS LINEAR SPREAD LENS	
HEX LO	DUVER INCLUDED.							M7 M10	GUTTER MOUNT 12" TRIDENT STAKE		SOLITE SOFT FOCUS LENS SANDBLASTED LENS	



Mesa

DIRECTIONAL WALL WASH


DESIGNER: SEAN LAVIN

The Mesa Directional Wall Wash has a rectangular form factor with a cut-off shroud for a directed, glare reducing illumination. It features an integrated LED module light engine with 3 field selectable power levels. Its adjustable and lockable head rotate up to 234 degrees (+/- 117°) for enhanced aiming. The unit is IP65-rated ensured by fully sealed front glass which can be coupled with multiple optical accessories for reliable and versatile performance in outdoor environments. Mesa is also compatible with various mounting accessories to provide installation flexibility.



2" / 51 mm 4.5" / 114 mm
4.5" / 114 mm
Brass or Copper
Bronze, Hand-Rubbed Antique Brass or Natural Copper
3.2 lb
Integrated LED
220, 350, 470
Selectable: 3W, 5W, 7W
12V
18 AWG, 36"
MLV
2700K
90 CRI
3 Step
Yes
-30°C min -40°C max
36,000 Hours
Standard 1": 15", 18", 24"
Thumb Screw (Included), Countersunk Screw (Included)
Heavy-Duty Stake, Deck/Surface Mount, Arbor Bungee Strap, Arbor Tree & Surface Mount, Arbor Tree Mount Screw-In, Arbor Gutter Mount, 12" Trident Spike
Hex Louver (Included), Optical Lenses: Wall Wash Horizontal Spread, Wall Wash Vertical Spread
Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



SL668HAB, SL668BZ,

SL668NC



SL677



ARBOR BUNGEE STRAP





ARBOR TREE & SURFACE MOUNT ARBOR TREE MOUNT SCREW-IN

SL665BZ, SL665HAB, SL665NC



ARBOR GUTTER MOUNT

SL667



12" TRIDENT SPIKE SL6122BZ, SL6122HAB,

SL6122NC



HEX LOUVER (INCLUDED)



SL678

WALL WASH HORIZONTAL SPREAD

WALL WASH VERTICAL SPREAD SL679

PRODU	ЈСТ	RIS	ER HEIGHT	FINIS	SH	LA	MP	МО	UNTING
SL628	MESA DIRECTIONAL WALL WASH	NR 11 12 13	NO RISER 15" RISER (1" DIA.) 18" RISER (1" DIA.) 24" RISER (1" DIA.)	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER	L1	INTEGRATED LED SELECTABLE 3W, 5W, 7W 90 CRI 2700K	M1 M2 M4 M5 M6	NO MOUNT HEAVY-DUTY STAKE SURFACE BUNGEE TREE SURFACE TREE SCREW-IN GUTTER MOUNT
HEX LC	DUVER INCLUDED.								12" TRIDENT SPIKE



Sierra

DIRECTIONAL SPOT

DESIGNER: SEAN LAVIN

The Sierra directional spotlight features a sleek cylindrical design with a fully sealed, domed glass lens for water dispersion. Its adjustable and lockable head rotate up to 234 degrees (+/- 117°) for enhanced aiming. Engineered for durability, it includes a field-replaceable ceramic socket assembly and IP65-rated protection, ensuring reliable performance in outdoor environments. Sierra is compatible with various mounting accessories to provide installation flexibility.



DIMENSIONS Fixture Height

Fixture Width

MATERIAL

Material

Finish

Weight SOCKET

Assembly

LAMPING

Lamp Type

Lumens

Watts

Voltage

Lead Wire

Dimming

Color Quality

Color Binning

Field Serviceable LED

Operating Temperature

CCT

DIMENSIONS



MOUNTING & ACCESSORIES





AKE DECK/SURFACE MOUNT ARBOR BUNGEE STRAP



SL672



ARBOR TREE & SURFACE MOUNT

SL664BZ, SL664HAB, SL664NC



ARBOR TREE MOUNT SCREW-IN

SL665BZ, SL665HAB, SL665NC



COLORED LENS SL670BL, SL670GR,

SL670RD



LENS DIFFUSERS SL6105DF, SL6105LL, SL6105SF,

Ŷ
HEAVY-DUTY STA

SL659

SL668HAB, SL668BZ, SL668NC



ARBOR GUTTER MOUNT SL667



12" TRIDENT SPIKE SL6122BZ, SL6122HAB, SL6122NC

HEX LOUVER (INCLUDED)

SL6105SB

Riser

LED Lifetime

OPTIONS

Knuckle	Thumb Screw (Included), Countersunk Screw (Included)
Mounting	Heavy-Duty Stake, Deck/Surface Mount, Arbor Bungee Strap, Arbor Tree & Surface Mount, Arbor Tree Mount Screw-In, Arbor Gutter Mount, 12" Trident Stake
Optical Controls	Hex Louver (Included), Colored Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread,

7.3" / 185 mm

2.4" / 61 mm

Brass or Copper

Natural Copper 2.5 lb

495, 507

18 AWG, 36"

5W

12V

MLV

2700K

90 CRI

3 Step

-30°C min -40°C max

Standard 1": 15", 18", 24"

36,000 Hours

Yes

Bronze, Hand-Rubbed Antique Brass or

Ceramic with spring-reinforced

MR16 LED (Sold Separately)

electrical connection

WARRANTY

Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

Linear Spread, Solite Soft Focus, Sandblasted

PRODU	JCT	RISE	ER HEIGHT	FINIS	SH	LAN	ИP	MOI	JNTING	LE	NS
SL622	SIERRA DIRECTIONAL SPOT	NR 11 12 13	NO RISER 15" RISER (1" DIA.) 18" RISER (1" DIA.) 24" RISER (1" DIA.)		BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER	В3	NO LAMP LED LAMP MR16 5W 36° 90 CRI 2700K LED LAMP MR16 5W 60° 90 CRI 2700K	M1 M2 M4	NO MOUNT HEAVY-DUTY STAKE SURFACE BUNGEE TREE SURFACE TREE SCREW-IN	BL GR RD DF	NO LENS BLUE GREEN RED DIFFUSER SPREAD LENS LINEAR SPREAD LENS
HEX LO	DUVER INCLUDED.								GUTTER MOUNT 12" TRIDENT STAKE		SOLITE SOFT FOCUS LENS SANDBLASTED LENS



Sierra

DIRECTIONAL SPOTLIGHT WITH 50° CUT-OFF SHROUD

DESIGNER: SEAN LAVIN

Sierra directional spotlight features a sleek cylindrical design with a 50° cut-off shroud, delivering precise, glare-reducing illumination. Its adjustable and lockable head rotate up to 234 degrees (+/- 117°) for enhanced aiming. The unit is IP65-rated ensured by fully sealed dome glass and includes a field-replaceable ceramic socket assembly for reliable performance in outdoor environments. Sierra is compatible with various mounting accessories to provide installation flexibility.







DIMENSIONS Fixture Height

DIMENSIONS



MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE SL659

ARBOR GUTTER MOUNT

SL667



SL668HAB,

12" TRIDENT SPIKE

SL6122BZ, SL6122HAB, SL6122NC

SL668BZ,

SL668NC



SL672

ARBOR BUNGEE



ARBOR TREE & SURFACE MOUNT





ARBOR TREE MOUNT SCREW-IN SL665BZ,

SL665HAB, SL665NC



HEX LOUVER (INCLUDED) COLORED LENS





LENS DIFFUSERS

SL6105DF, SL6105LL, SL6105SF, SL6105SB

Fixture Width	2.4" / 61 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.5 lb
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495, 507
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"
Knuckle	Thumb Screw (Included), Countersunk Screw (Included)
Mounting	Heavy-Duty Stake, Deck/Surface Mount, Arbor Bungee Strap, Arbor Tree & Surface Mount, Arbor Tree Mount Screw-In, Arbor Gutter Mount, 12" Trident Stake

7.3" / 185 mm

ORDERING INFORMATION

Optical Controls

WARRANTY

PRODU	JCT	RISI	ER HEIGHT	FINIS	SH	LAN	1P	MOI	JNTING	LE	NS
SL623	SIERRA	NR	NO RISER	BZ	BRONZE	NB	NO LAMP	NM	NO MOUNT	NL	NO LENS
	DIRECTIONAL SPOT	11	15" RISER (1" DIA.)	HAB	HAND-RUBBED	В3	LED LAMP MR16 5W 36°	M1	HEAVY-DUTY STAKE	BL	BLUE
	WITH 50° CUT-OFF	12	18" RISER (1" DIA.)		ANTIQUE BRASS		90 CRI 2700K	M2	SURFACE	GR	GREEN
	SHROUD	13	24" RISER (1" DIA.)	NC	NATURAL COPPER	B4	LED LAMP MR16 5W 60°	M4	BUNGEE	RD	RED
							90 CRI 2700K	M5	TREE SURFACE	DF	DIFFUSER SPREAD LENS
								M6	TREE SCREW-IN	LL	LINEAR SPREAD LENS
								M7	GUTTER MOUNT	SF	SOLITE SOFT FOCUS LEN
HEYIC	DUVER INCLUDED.							M10	12" TRIDENT STAKE	SB	SANDBLASTED LENS

Hex Louver (Included), Colored Lenses: Blue,

Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted Lifetime warranty on manufacturer defects in

the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.



Tule

DIRECTIONAL MICRO-SPOTLIGHT

DESIGNER: SEAN LAVIN

Tule is a directional Micro-Spotlight featuring a compact aperture and integrated LED module, paired with a ball swivel for precise and effortless aiming. This micro luminaire is designed to discretely illuminate landscape features and details.



DIMENSIONS	
Fixture Height	1.6" / 41 mm
Fixture Width	2" / 51 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	.5 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	236
Watts	3.5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
OPTIONS	
Mounting	Deck/Surface Mount, 5" Stainless Steel Spikes
Optical Controls	Hex Louver (Included)
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



HEX LOUVER (INCLUDED) SL693



DECK/SURFACE MOUNT





5" STAINLESS STEEL SPIKES

SL690

PRODUCT			SH	LAMPING			MOUNTING		
SL626	TULE MICRO DIRECTIONAL SPOT	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER	L1 INTEGRATED LED	0 3.5W 45° 90 CRI 2700K		SURFACE 5" STAINLESS STEEL SPIKES		





Tule

MICRO DIRECTIONAL SPOT WITH CUT-OFF SHROUD


DESIGNER: SEAN LAVIN

The Tule Micro Spot with a 50° cut-off shroud combines its small aperture with a precision-engineered shroud to reduce glare. Paired with a ball joint for exact aiming, it delivers focused and refined illumination in a sleek, minimalist design.



DIMENSIONS	
Fixture Height	2.5" / 64 mm
Fixture Width	2" / 51 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	.5 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	236
Watts	3.5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
OPTIONS	
Mounting	Deck/Surface Mount, 5" Stainless Steel Spikes
Optical Controls	Hex Louver (Included)
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



HEX LOUVER (INCLUDED) SL693



DECK/SURFACE MOUNT



SL668HAB, SL668BZ, SL668NC



5" STAINLESS STEEL SPIKES

SL690

PRODU	UCT FINISH			LAMPING			MOUNTING		
SL627	TULE MICRO DIRECTIONAL SPOT WITH CUT-OFF SHROUD	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER	L1	INTEGRATED LED 3.5W 45° 90 CRI 2700K		SURFACE 5" STAINLESS STEEL SPIKES		





PATH & AREA LIGHTING



Ascend

DESIGNER: SEAN LAVIN


The Ascend pathway light features a classic tapered shade with a clean, modern design.

Its simple, refined form provides effective illumination for outdoor paths and landscapes.




DIMENSIONS	
Shade Height	3.9" / 99 mm
Shade Diameter	4.7" / 119 mm
Shade & 15" Riser Height	21.7" / 551 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.7" / 627 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.7" / 780 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.6 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	12V
Lead Wire	18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"; Modern 2": 15", 18"
Mounting	Heavy-Duty Stake, Deck/Surface Mount
Optical Controls	Cut-Off Reflector
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION

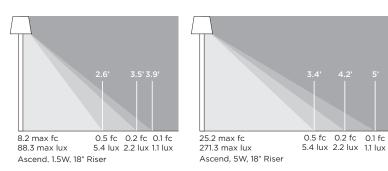

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



SL668BZ,

SL668HAB, SL668NC



CUT-OFF REFLECTOR SL669

ORDERING INFORMATION

22 18" RISER (1.9" DIA.)

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL614 ASCEND	NR NO RISER	BZ BRONZE	NB NO LAMP	NM NO MOUNT	NF NO REFLECTOR
	11 15" RISER (1" DIA.)	HAB HAND-RUBBED	B1 LED LAMP G4 1.5W	M1 HEAVY-DUTY STAKE	A1 CUT-OFF REFLECTOR
	12 18" RISER (1" DIA.)	ANTIQUE BRASS	90 CRI 2700K	M2 SURFACE	
	13 24" RISER (1" DIA.)	NC NATURAL COPPER	B2 LED LAMP G4 5W		
	21 15" RISER (1.9" DIA.)		90 CRI 2700K		



Balsam


DESIGNER: SEAN LAVIN

The Balsam pathway light features a shade with soft corners that transition seamlessly into straight lines, creating a balanced, refined modern design. Its clean form complements natural landscapes while providing effective illumination for outdoor paths.




DIMENSIONS	
Shade Height	3.3" / 84 mm
Shade Diameter	4.8" / 122 mm
Shade & 15" Riser Height	21.1" / 536 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.1" / 612 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.1" / 765 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.3 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	12V
Lead Wire	18 AWG
	46" (15" riser), 42" (18" riser), 36" (24" riser)
Dimming	46" (15" riser), 42" (18" riser), 36" (24" riser) MLV
Dimming CCT	
	MLV
ССТ	MLV 2700K
CCT Color Quality	MLV 2700K 90 CRI
CCT Color Quality Color Binning	MLV 2700K 90 CRI 3 Step
CCT Color Quality Color Binning Field Serviceable LED	MLV 2700K 90 CRI 3 Step Yes
CCT Color Quality Color Binning Field Serviceable LED Operating Temperature	MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime	MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS	MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours
CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS Riser	MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours Standard 1": 15", 18", 24"; Modern 2": 15", 18"
CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS Riser Mounting	MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours Standard 1": 15", 18", 24"; Modern 2": 15", 18" Heavy-Duty Stake, Deck/Surface Mount

DIMENSIONS



LIGHT DISTRIBUTION

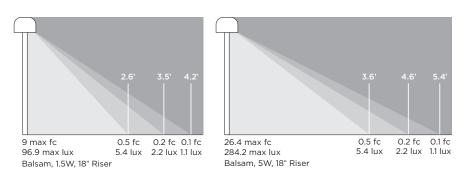

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



SL668BZ, SL668HAB,

SL668NC



CUT-OFF REFLECTOR SL669

ORDERING INFORMATION

22 18" RISER (1.9" DIA.)

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL615 BALSAM	NR NO RISER	BZ BRONZE	NB NO LAMP	NM NO MOUNT	NF NO REFLECTOR
	11 15" RISER (1" DIA.)	HAB HAND-RUBBED	B1 LED LAMP G4 1.5W	M1 HEAVY-DUTY STAKE	A1 CUT-OFF REFLECTOR
	12 18" RISER (1" DIA.)	ANTIQUE BRASS	90 CRI 2700K	M2 SURFACE	
	13 24" RISER (1" DIA.)	NC NATURAL COPPER	B2 LED LAMP G4 5W		
	21 15" RISER (1.9" DIA.)		90 CRI 2700K		



Peak


DESIGNER: SEAN LAVIN

The Peak pathway light features a classic tapered shade that enhances light distribution. Its lamp-inspired design adds timeless charm while effectively casting illumination across pathways and outdoor spaces.




DIMENSIONS	
Shade Height	2.5" / 64 mm
Shade Diameter	5.5" / 140 mm
Shade & 15" Riser Height	21.3" / 541 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.3" / 617 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.3" / 770 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.6 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumana	
Lumens	150, 550
Lumens Watts	150, 550 1.5W, 5W
Watts	1.5W, 5W
Watts Voltage	1.5W, 5W 12V 18 AWG
Watts Voltage Lead Wire	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Watts Voltage Lead Wire Dimming	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV
Watts Voltage Lead Wire Dimming CCT	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K
Watts Voltage Lead Wire Dimming CCT Color Quality	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS Riser	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours Standard 1": 15", 18", 24"
Watts Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS Riser Mounting	1.5W, 5W 12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours Standard 1": 15", 18", 24" Heavy-Duty Stake, Deck/Surface Mount

DIMENSIONS



LIGHT DISTRIBUTION

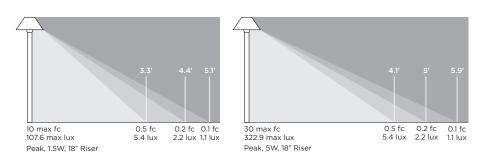

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



DECK/SURFACE MOUNT SL668BZ, SL668HAB, SL668NC



CUT-OFF REFLECTOR SL669

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL611 PEAK	NR NO RISER 11 15" RISER (1" DIA.) 12 18" RISER (1" DIA.) 13 24" RISER (1" DIA.)	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B1 LED LAMP G4 1.5W 90 CRI 2700K B2 LED LAMP G4 5W 90 CRI 2700K	NM NO MOUNT M1 HEAVY-DUTY STAKE M2 SURFACE	NF NO REFLECTOR A1 CUT-OFF REFLECTOR



Peak Wide


DESIGNER: SEAN LAVIN

The Peak Wide pathway light features a wide, classic tapered shade designed to maximize light performance. Its larger shade enhances coverage, casting illumination further across walkways and surrounding landscapes.


HAND-RUBBED ANTIQUE BRASS WITH 1' RISER

DIMENSIONS	
Shade Height	2.9" / 74 mm
Shade Diameter	8.5" / 216 mm
Shade & 15" Riser Height	21.6" / 549 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.6" / 625 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.6" / 777 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.5 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	12V
Lead Wire	18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"
Mounting	Heavy-Duty Stake, Deck/Surface Mount
Optical Controls	Cut-Off Reflector
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION

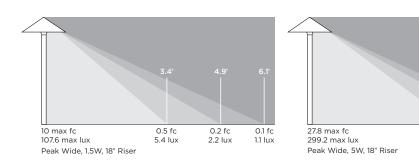

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



DECK/SURFACE MOUNT

SL668BZ,
SL668HAB,
SL668NC



CUT-OFF REFLECTOR SL669

ORDERING INFORMATION

PRODUCT	Г	RIS	ER HEIGHT	FINIS	Н	LAN	1 P	МО	UNTING	REI	FLECTOR
SL610 PE	EAK WIDE	NR	NO RISER	BZ	BRONZE	NB	NO LAMP	NM	NO MOUNT	NF	NO REFLECTOR
		11	15" RISER (1" DIA.)	HAB	HAND-RUBBED	B1	LED LAMP G4 1.5W	M1	HEAVY-DUTY STAKE	A1	CUT-OFF REFLECTOR
		12	18" RISER (1" DIA.)		ANTIQUE BRASS		90 CRI 2700K	M2	SURFACE		
		13	24" RISER (1" DIA.)	NC	NATURAL COPPER	B2	LED LAMP G4 5W				

90 CRI 2700K



0.5 fc 5.4 lux 0.2 fc 0.1 fc 2.2 lux 1.1 lux

Plateau


DESIGNER: SEAN LAVIN

The Plateau pathway light features a classic soft dome shade with gently rounded sides. Its simple, functional design provides uniform illumination for pathways and gardens, blending seamlessly into the natural landscape.




DIMENSIONS	
Shade Height	2.1" / 53 mm
Shade Diameter	5.5" / 140 mm
Shade & 15" Riser Height	21.1" / 536 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.1" / 612 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.1" / 790 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.8 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Watts Voltage	1.5W, 5W 12V
Voltage	12V 18 AWG
Voltage Lead Wire	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Voltage Lead Wire Dimming	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV
Voltage Lead Wire Dimming CCT	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K
Voltage Lead Wire Dimming CCT Color Quality	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS Riser	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours Standard 1": 15", 18", 24"
Voltage Lead Wire Dimming CCT Color Quality Color Binning Field Serviceable LED Operating Temperature LED Lifetime OPTIONS Riser Mounting	12V 18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser) MLV 2700K 90 CRI 3 Step Yes -30°C min -40°C max 25,000 Hours Standard 1": 15", 18", 24" Heavy-Duty Stake, Deck/Surface Mount

DIMENSIONS



LIGHT DISTRIBUTION

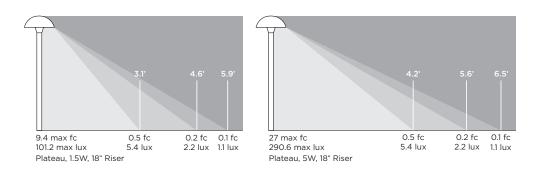

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



SL668BZ, SL668HAB,

SL668NC



CUT-OFF REFLECTOR SL669

ORDERING INFORMATION

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL613 PLATEAU	NR NO RISER	BZ BRONZE	NB NO LAMP	NM NO MOUNT	NF NO REFLECTOR
	11 15" RISER (1" DIA.)	HAB HAND-RUBBED	B1 LED LAMP G4 1.5W	M1 HEAVY-DUTY STAKE	A1 CUT-OFF REFLECTOR
	12 18" RISER (1" DIA.)	ANTIQUE BRASS	90 CRI 2700K	M2 SURFACE	
	13 24" RISER (1" DIA.)	NC NATURAL COPPER	B2 LED LAMP G4 5W		

90 CRI 2700K



Plateau Wide


DESIGNER: SEAN LAVIN

The Plateau Wide pathway light features a classic soft dome shade with gently rounded sides, designed to blend seamlessly into natural landscapes. Its wider shade maximizes light performance, providing increased coverage and uniform illumination for pathways and gardens.




DIMENSIONS	
Shade Height	2" / 51 mm
Shade Diameter	7.8" / 198 mm
Shade & 15" Riser Height	20.9" / 531 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.9" / 632 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.9" / 785 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.5 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	12V
Lead Wire	18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"
Mounting	Heavy-Duty Stake, Deck/Surface Mount
Optical Controls	Cut-Off Reflector
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION

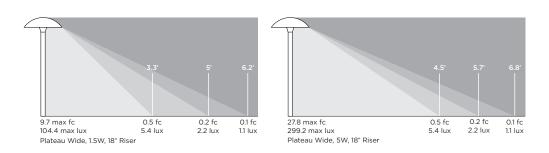

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT



DECK/SURFACE MOUNT SL668BZ, SL668HAB, SL668NC



CUT-OFF REFLECTOR SL669

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL612 PLATEAU WIDE	NR NO RISER	BZ BRONZE	NB NO LAMP	NM NO MOUNT	NF NO REFLECTOR
	11 15" RISER (1" DIA.)	HAB HAND-RUBBED	B1 LED LAMP G4 1.5W	M1 HEAVY-DUTY STAKE	A1 CUT-OFF REFLECTOR
	12 18" RISER (1" DIA.)	ANTIQUE BRASS	90 CRI 2700K	M2 SURFACE	
	13 24" RISER (1" DIA.)	NC NATURAL COPPER	B2 LED LAMP G4 5W		
			90 CRI 2700K		



Sentinel Shallow


DESIGNER: SEAN LAVIN

The Sentinel Shallow pathway light features a cylindrical, shallow shade that creates a modern architectural presence. Its low profile shade ensures wider coverage and defined distribution of light.




DIMENSIONS	
Shade Height	2.2" / 56 mm
Shade Diameter	4.8" / 122 mm
Shade & 15" Riser Height	20.8" / 528 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	23.8" / 605 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	29.8" / 757 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.4 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	12V
Lead Wire	18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18" 24"; Modern 2": 15", 18"
Mounting	Heavy-Duty Stake, Deck/Surface Mount
Optical Controls	Cut-Off Reflector
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies
WARRANIY	for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION

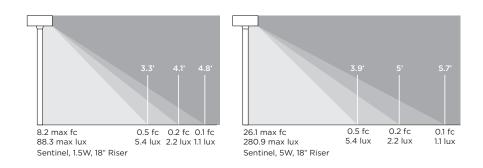

MOUNTING & ACCESSORIES







SL668BZ,

SL668HAB, SL668NC



CUT-OFF REFLECTOR SL669

ORDERING INFORMATION

22 18" RISER (1.9" DIA.)

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL617 SENTINEL SHALLOW	NR NO RISER 11 15" RISER (1" DIA.) 12 18" RISER (1" DIA.) 13 24" RISER (1" DIA.) 21 15" RISER (1.9" DIA.)	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B1 LED LAMP G4 1.5W 90 CRI 2700K B2 LED LAMP G4 5W 90 CRI 2700K	NM NO MOUNT M1 HEAVY-DUTY STAKE M2 SURFACE	NF NO REFLECTOR A1 CUT-OFF REFLECTOR



Sentinel Deep


DESIGNER: SEAN LAVIN

The Sentinel Deep Shade pathway light features a straight-sided, deep shade that creates a modern architectural presence. Its taller profile and clean lines provide refined, focused illumination for pathways and outdoor spaces.




DIMENSIONS	
Shade Height	3.2" / 81 mm
Shade Diameter	4.8" / 122 mm
Shade & 15" Riser Height	21.1" / 536 mm
15" Riser Height	18" / 457 mm
Shade & 18" Riser Height	24.1" / 612 mm
18" Riser Height	22" / 559 mm
Shade & 24" Riser Height	30.1" / 765 mm
24" Riser Height	28" / 711 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.9 lbs (with 18" standard riser)
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	12V
Lead Wire	18 AWG 46" (15" riser), 42" (18" riser), 36" (24" riser)
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Riser	Standard 1": 15", 18", 24"; Modern 2": 15", 18"
Mounting	Heavy-Duty Stake, Deck/Surface Mount
Optical Controls	Cut-Off Reflector
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION

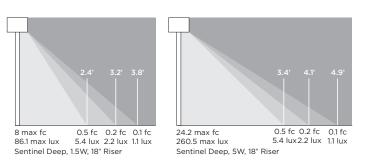

MOUNTING & ACCESSORIES



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659



DECK/SURFACE MOUNT SL668BZ, SL668HAB, SL668NC



CUT-OFF REFLECTOR SL669

PRODUCT	RISER HEIGHT	FINISH	LAMP	MOUNTING	REFLECTOR
SL616 SENTINEL DEEP	11 15" RISER (1" DIA.) 12 18" RISER (1" DIA.)	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B1 LED LAMP G4 1.5W 90 CRI 2700K B2 LED LAMP G4 5W 90 CRI 2700K	NM NO MOUNT M1 HEAVY-DUTY STAKE M2 SURFACE	NF NO REFLECTOR A1 CUT-OFF REFLECTOR




Acadia

DESIGNER: SEAN LAVIN


The Acadia pathway light features a modern, minimalist design with a continuous structure and a right-angled form where the light emits.

Its integrated LED module light engine coupled with precision optics maximize light performance, providing efficient, forward throw distribution for outdoor spaces.

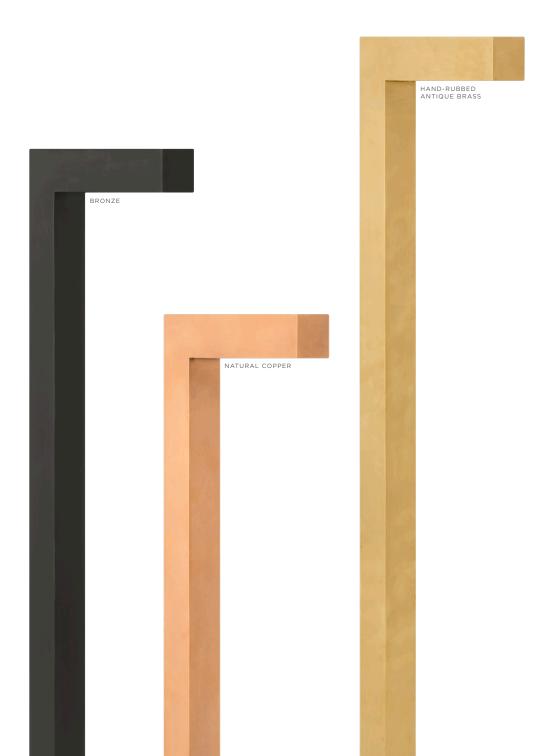


DIMENSIONS Fixture Height 23" / 584 mm Fixture Width 1.3" / 33 mm Fixture Depth 6" / 152 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 3.1 lb LAMPING Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.		
Fixture Width Fixture Depth 6" / 152 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 3.1 lb LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature LED Lifetime 50,000 Hours WARRANTY WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	DIMENSIONS	
Fixture Depth MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 3.1 lb LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS MARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Fixture Height	23" / 584 mm
MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 3.1 lb LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime SO,000 Hours OPTIONS MARANTY WARRANTY Brass or Copper Bronze, Hand-Rubbed Antique Brass or Naturale Brass or Natural Copper Weight 10	Fixture Width	1.3" / 33 mm
Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 3.1 lb LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS MARANTY Heavy-Duty Stake, Deck/Surface Mount WARRANTY Weight 3.1 lb Bronze, Hand-Rubbed Antique Brass or Nature Bronze Copper Natural Copper 173 8 AWG, 36" 18 AWG, 36" 19 OK COPTIONS Heavy-Duty Stake, Deck/Surface Mount Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Fixture Depth	6" / 152 mm
Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 3.1 lb LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS MARRANTY Bronze, Hand-Rubbed Antique Brass or Natural Copper Antique Brass or Natural Copper Natural Copper 1. Iberiand S. Iber Natural Copper Natural Copper 1. Iberiand S. Iber Natural Copper Natural Copper	MATERIAL	
Weight 3.1 lb LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30 °C min -40 °C max LED Lifetime 50,000 Hours OPTIONS MARANTY Lege Heavy-Duty Stake, Deck/Surface Mount WARRANTY	Material	Brass or Copper
LAMPING Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS MARRANTY Heavy-Duty Stake, Deck/Surface Mount WARRANTY	Finish	
Lamp Type Integrated LED Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY	Weight	3.1 lb
Lumens 173 Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY WARRANTY	LAMPING	
Watts 4.2W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY WARRANTY	Lamp Type	Integrated LED
Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Lumens	173
Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Watts	4.2W
Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Voltage	12V
CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Lead Wire	18 AWG, 36"
Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Dimming	MLV
Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount WARRANTY Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	ССТ	2700K
Field Serviceable LED Yes Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Color Quality	90 CRI
Operating Temperature -30°C min -40°C max LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Color Binning	3 Step
LED Lifetime 50,000 Hours OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Field Serviceable LED	Yes
OPTIONS Mounting Heavy-Duty Stake, Deck/Surface Mount Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	Operating Temperature	-30°C min -40°C max
Mounting Heavy-Duty Stake, Deck/Surface Mount Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	LED Lifetime	50,000 Hours
Lifetime warranty on manufacturer defects in the construction, but normal warranty applies	OPTIONS	
WARRANTY the construction, but normal warranty applies	Mounting	Heavy-Duty Stake, Deck/Surface Mount
	WARRANTY	the construction, but normal warranty applies

DIMENSIONS



LIGHT DISTRIBUTION







105.8 max fc 0.5 fc 0.2 fc 0.1 fc 1138.8 max lux 5.4 lux 2.2 lux 1.1 lux Acadia, 4.2W, From the Side

MOUNTING & ACCESSORIES

Acadia, 4.2W, From the Front



SL659

HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL668BZ, SL668HAB, SL668NC


PRODUCT	FINISH	LAMP	MOUNTING
SL620 ACADIA	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS	L1 INTEGRATED LED 4.2W 90 CRI 2700K	NM NO MOUNT M1 HEAVY-DUTY STAKE
	NC NATURAL COPPER		M2 SURFACE



Acadia Edge


DESIGNER: SEAN LAVIN

The Acadia Edge pathway light features a modern, minimalist design with a continuous structure and a right-angled form where the light emits. A chamfer feature at the edge softens the look, adding subtle refinement. Its integrated LED module light engine coupled with precision optics maximize light performance, providing efficient, forward throw distribution for outdoor spaces.

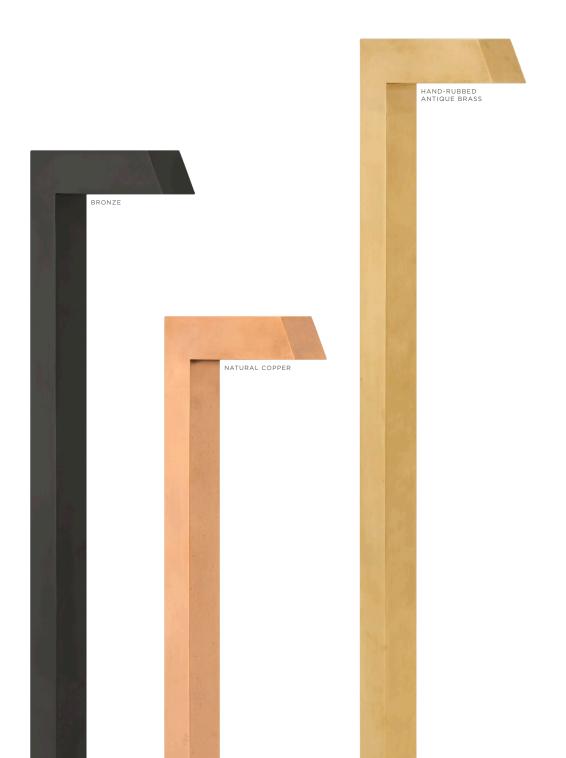


DIMENSIONS	
Fixture Height	23" / 584 mm
Fixture Width	1.3" / 33 mm
Fixture Depth	6" / 152 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	173
Watts	4.2W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Heavy-Duty Stake, Deck/Surface Mount
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION







Acadia Edge, 4.2W, From the Side

MOUNTING & ACCESSORIES

Acadia Edge, 4.2W, From the Front



HEAVY-DUTY STAKE DECK/SURFACE MOUNT SL659

SL668BZ, SL668HAB, SL668NC

PRODUCT	FINISH	LAMPING	MOUNTING
SL621 ACADIA EDGE	BZ BRONZE	L1 INTEGRATED LED 4.2W 90 CRI 2700K	NM NO MOUNT
	HAB HAND RUBBED ANTIQUE BRASS		M1 HEAVY DUTY STAKE
	NC NATURAL COPPER		M2 SURFACE



Kennett

DESIGNER: SEAN LAVIN


The Kennett pathway light combines the natural elegance of travertine with a sculptural design, available in dark and natural finishes. With its striking form and soft illumination, it functions as both a beautiful outdoor accent and a practical lighting solution.






DIMENSIONS	
Fixture Height	14.5" / 368 mm
Fixture Diameter	9.3" / 236 mm
MATERIAL	
Material	Travertine Stone
Finish	Dark Travertine, Natural Travertine
Weight	36.4 lbs
LAMPING	
Lamp Type	Integrated LED
Lumens	189
Watts	7W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
OPTIONS	
Mounting	Concrete Anchors, 12" Stainless Steel Spikes
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



PRODUCT	FINISH	LAMPING	MOUNTING
SL618 KENNETT	DT DARK TRAVERTINE	L1 INTEGRATED LED 7W 90 CRI 2700K	M3 CONCRETE ANCHOR
	NT NATURAL TRAVERTINE		M8 12" STAINLESS STEEL SPIKES



Rayul designer: Sean Lavin


The Rayul pathway light features a sleek travertine design with a flat top, offering a modern, architectural aesthetic. Its clean lines and refined form evoke the elegance of sculptural furniture, adding sophistication and functionality to outdoor spaces.






DIMENSIONS	
Fixture Height:	12.9" / 328 mm
Fixture Diameter:	9.3" / 236 mm
MATERIAL	
Material	Travertine Stone
Finish	Dark Travertine, Natural Travertine
Weight	33.7 lbs
LAMPING	
Lamp Type	Integrated LED
Lumens	189
Watts	7W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
CCT	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
OPTIONS	
Mounting	Concrete Anchors, 12" Stainless Steel Spikes
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



PRODUCT	FINISH	LAMPING	MOUNTING
SL619 RAYUL	DT DARK TRAVERTINE	L1 INTEGRATED LED 7W 90 CRI 2700K	M3 CONCRETE ANCHOR
	NT NATURAL TRAVERTINE		M8 12" STAINLESS STEEL SPIKES



IN-GRADE LIGHTING



Delphini

MICRO FIXED IN-GRADE WITH FLANGE

DESIGNER: SEAN LAVIN

Delphini is a micro fixed in-grade luminaire featuring brass or copper construction and integrated LED module. Design to discretely illuminate paths and highlight architectural details.








DIMENSIONS	
Fixture Height	1.3" / 25 mm
Fixture Width	1.5" / 51 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	.4 lbs
LAMPING	
Lamp Type	Integrated LED
Lumens	307
Watts	4.2W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
OPTIONS	
Mounting	Deck/Surface Mount, 5" Stainless Steel Spikes
Accessory	Micro Spot Flange
MARRANTY	Lifetime warranty on manufacturer defects in

DIMENSIONS



MOUNTING & ACCESSORIES





SL668HAB, SL668BZ, SL668NC



5" STAINLESS STEEL SPIKES



SL690

FLANGE SL692BZ, SL692HAB, SL692NC

ORDERING INFORMATION

WARRANTY

PRODUCT	FINISH	LAMP	MOUNTING	ACCESSORY
SL629 DELPHINI MICRO FIXED IN-GRADE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS	L1 INTEGRATED LED 4.2W 90 CRI 2700K	M2 SURFACE M9 5" STAINLESS	NF NO FLANGE F1 FLANGE*
	NC NATURAL COPPER		STEEL SPIKES	

the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

^{*}FLANGED CANNOT BE INSTALLED AS A SURFACE MOUNT.



Shaver 16 Fixed Open Flat

IN-GRADE

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed Open Flat in-grade light, made from durable brass or copper, offers a sleek, minimalist solution for illuminating pathways and hardscapes. Designed for secure installation with stainless steel spikes, it provides reliable performance and timeless style. As a type of in-grade or well light, it enhances landscapes, pathways, and architectural elements while improving safety and security in outdoor spaces.








DIMENSIONS	
Fixture Height with Trim	3.9" / 99 mm
Trim Width	4" / 102 mm
Trim Height	.3" / 7 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.3 lb
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red; Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



CONCRETE POUR SL660



GRASS SHIELD SL662BZ, SL662HAB, SL662NC



HEX LOUVER IN-GRADE (INCLUDED) SL675



COLORED LENSES SL670BL, SL670GR, SL670RD



LENS DIFFUSERS SL6105DF, SL6105LL, SL6705SF, SL6105SB

ORDERING INFORMATION

PRODU	PRODUCT		FINISH		LAMP L		LENS		GRASS SHIELD	
SL6120	SHAVER 16 FIXED OPEN FLAT	BZ	BRONZE	NB	NO LAMP	NL	NO LENS	NG	NO GRASS SHIELD	
	IN-GRADE	HAB	HAND-RUBBED	В3	LED LAMP MR16 5W 36°	BL	BLUE	G1	GRASS SHIELD	
			ANTIQUE BRASS		90 CRI 2700K	GR	GREEN			
		NC	NATURAL COPPER			RD	RED			
						DF	DIFFUSER SPREAD LENS			
						LL	LINEAR SPREAD LENS			
						SF	SOLITE SOFT			
							FOCUS LENS			
						SB	SANDBLASTED LENS			



Shaver 11 Fixed Open Flat

IN-GRADE

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed Open Flat in-grade light, constructed from brass or copper, provides a durable solution for lighting pathways and hardscapes. It supports secure installation with an optional concrete pour kit and grass shield. A field-replaceable ceramic socket ensures long-term performance, and available optical accessories allow precise beam control. Designed for in-grade applications, it enhances visibility and safety in outdoor environments.








DIMENSIONS	
Fixture Height with Trim	3.7" / 94 mm
Trim Width	3.3" / 84 mm
Trim Height	.3" / 7 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.7 lb
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red; Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



CONCRETE POUR SL661



GRASS SHIELD SL663BZ, SL663HAB, SL663NC



HEX LOUVER IN-GRADE (INCLUDED) SL676



COLORED LENSES SL671BL, SL671GR, SL671RD



LENS DIFFUSERS SL6106DF, SL6106LL, SL6706SF, SL6106SB

ORDERING INFORMATION

PRODUCT	FINIS	БН	LAI	MP	LEN	NS	GR	ASS SHIELD
SL6121 SHAVER 11 FIXED OPEN FLAT	BZ	BRONZE	NB	NO LAMP	NL	NO LENS	NG	NO GRASS SHIELD
IN-GRADE	HAB	HAND-RUBBED	B5	LED LAMP MR11 3W 36°	BL	BLUE	G2	GRASS SHIELD
		ANTIQUE BRASS		90 CRI 2700K	GR	GREEN		
	NC	NATURAL COPPER			RD	RED		
					DF	DIFFUSER SPREAD LENS		
					LL	LINEAR SPREAD LENS		
					SF	SOLITE SOFT		
						FOCUS LENS		
					SB	SANDBLASTED LENS		



Shaver 16 Fixed Open

IN-GRADE

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed Open in-grade light, made from durable brass or copper, offers a sleek, minimalist solution with an open trim to enhance light coverage. Compatible concrete pour kit and grass shield accessory provide reliable and secure installations. The Shaver series features a field-replaceable ceramic socket for long-term performance as well as various optical control accessories to shape the beam of light as intended. As a type of in-grade or well light, it enhances landscapes, pathways, and architectural elements while improving safety and security for outdoor spaces.








DIMENSIONS	
Fixture Height with Trim	4" / 102 mm
Trim Width	4" / 102 mm
Trim Height	.4" / 10 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.3 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red; Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



CONCRETE POUR SL660



GRASS SHIELD SL662BZ, SL662HAB, SL662NC



HEX LOUVER IN-GRADE (INCLUDED) SL675



COLORED LENSES SL670BL, SL670GR, SL670RD



LENS DIFFUSERS SL6105DF, SL6105LL, SL6705SF, SL6105SB

ORDERING INFORMATION

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD	
SL630 SHAVER 16 FIXED OPEN IN-GRADE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B3 LED LAMP MR16 5W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN RD RED DF DIFFUSER SPREAD LENS LL LINEAR SPREAD LENS SF SOLITE SOFT FOCUS LENS SR SANDRI ASTED LENS	NG NO GRASS SHIELD G1 GRASS SHIELD	



Shaver 11 Fixed Open

IN-GRADE

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed Open in-grade light, constructed from brass or copper, provides a durable solution for lighting pathways and hardscapes. The open trim design ensures wider light coverage. It supports secure installation with an optional concrete pour kit and grass shield. A field-replaceable ceramic socket ensures long-term performance, and available optical accessories allow precise beam control. Designed for in-grade applications, it enhances visibility and safety in outdoor environments.








DIMENSIONS	
Fixture Height with Trim	3.8" / 97 mm
Trim Width	3.3" / 84 mm
Trim Height	.4" / 10 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.7 lb
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red; Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



CONCRETE POUR
SL661



GRASS SHIELD SL663BZ, SL663HAB, SL663NC



HEX LOUVER IN-GRADE (INCLUDED) SL676



COLORED LENSES SL671BL, SL671GR, SL671RD



LENS DIFFUSERS SL6106DF, SL6106LL, SL6706SF, SL6106SB

ORDERING INFORMATION

PRODUCT	FINIS	БН	LA	MP	LEN	ıs	GR	ASS SHIELD
SL631 SHAVER 11 FIXED OPEN IN-GRADE	BZ HAB	BRONZE HAND-RUBBED ANTIQUE BRASS		NO LAMP LED LAMP MR11 3W 36° 90 CRI 2700K	BL	NO LENS BLUE GREEN		NO GRASS SHIELD GRASS SHIELD
	NC	NATURAL COPPER		90 CRI 2700K		RED		
						LINEAR SPREAD LENS SOLITE SOFT		
					SB	FOCUS LENS SANDBLASTED LENS		



Shaver 16 Fixed

WITH SHROUD

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with Shroud in-grade light is made from durable brass or copper and securely installed with optional concrete pour kit and grass shield accessories. Its cut-off shroud minimizes unwanted glare while focusing the beam exactly where needed. Additionally, The Shaver series features a field-replaceable ceramic socket for long-term performance as well as various optical control accessories. Shaver enhances landscapes, pathways, and architectural elements with reliable performance and discrete style.








DIMENSIONS	
Fixture Height with Trim	4.8" / 122 mm
Trim Width	4" / 102 mm
Trim Height	1.2" / 30 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.4 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES







GRASS SHIELD SL662BZ, SL662HAB, SL662NC



HEX LOUVER IN-GRADE (INCLUDED) SL675



COLORED LENSES SL670BL, SL670GR,

SL670RD



LENS DIFFUSERS SL6105DF, SL6105LL, SL6705SF, SL6105SB

ORDERING INFORMATION

PROD	RODUCT		FINISH		LAMP		LENS		GRASS SHIELD	
SL632	SHAVER 16 FIXED WITH CUT-OFF SHROUD	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER		NO LAMP LED LAMP MR16 5W 36° 90 CRI 2700K	BL	GREEN	NG G1	NO GRASS SHIELD GRASS SHIELD	



Shaver 11 Fixed

WITH SHROUD

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed with Shroud in-grade light is made from durable brass or copper and securely installed with optional concrete pour kit and grass shield accessories. Its cut-off shroud minimizes unwanted glare while focusing the beam exactly where needed. Additionally, The Shaver series features a field-replaceable ceramic socket for long-term performance as well as various optical control accessories. Shaver enhances landscapes, pathways, and architectural elements with reliable performance and discrete style.








DIMENSIONS	
Fixture Height with Trim	4.3" / 109 mm
Trim Width	3.3" / 84 mm
Trim Height	.9" / 23 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.8 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES







GRASS SHIELD SL663BZ, SL663HAB, SL663NC



HEX LOUVER IN-GRADE (INCLUDED) SL676



COLORED LENSES SL671BL, SL671GR, SL671RD



LENS DIFFUSERS SL6106DF, SL6106LL, SL6706SF, SL6106SB

PRODUCT		FINIS	SH	LAI	MP	LEN	ıs	GR	ASS SHIELD
SL633	SHAVER 11 FIXED WITH	BZ	BRONZE	NB	NO LAMP	NL	NO LENS	NG	NO GRASS SHIELD
	CUT-OFF SHROUD	HAB	HAND-RUBBED	B5	LED LAMP MR11 3W 36°	BL	BLUE	G2	GRASS SHIELD
			ANTIQUE BRASS		90 CRI 2700K	GR	GREEN		
		NC	NATURAL COPPER			RD	RED		
						DF	DIFFUSER SPREAD LENS		
						LL	LINEAR SPREAD LENS		
						SF	SOLITE SOFT		
							FOCUS LENS		
						SB	SANDRI ASTED I ENS		





Shaver 16 Fixed

WITH GRILL GUARD

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with Grill Guard in-grade light is expertly crafted from durable brass or copper. Its grill guard minimizes glare while directing light upward, creating a defined illumination effect with a decorative pattern. The Shaver series features a field-replaceable ceramic socket for long-term performance as well as various optical control accessories making it ideal choice for discreetly illuminating pathways and hardscapes.








DIMENSIONS	
DIMENSIONS	
Fixture Height with Trim	4.2" / 107 mm
Trim Width	4" / 102 mm
Trim Height	.6" / 15 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.3 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



CONCRETE POUR SL660



GRASS SHIELD SL662BZ, SL662HAB, SL662NC



HEX LOUVER IN-GRADE (INCLUDED) SL675



COLORED LENSES

SL670BL, SL670GR, SL670RD



LENS DIFFUSERS SL6105DF, SL6105LL, SL6705SF, SL6105SB

ORDERING INFORMATION

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL634 SHAVER 16 FIXED WITH GRILL	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B3 LED LAMP MR16 5W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN RD RED DF DIFFUSER SPREAD LENS LL LINEAR SPREAD LENS SF SOLITE SOFT FOCUS LENS SB SANDBLASTED LENS	NG NO GRASS SHIELD G1 GRASS SHIELD



Shaver 11 Fixed

WITH GRILL GUARD

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed with Grill Guard in-grade light is expertly crafted from durable brass or copper. Its grill guard minimizes glare while directing light upward, creating a defined illumination effect with a decorative pattern. The Shaver series features a field-replaceable ceramic socket for long-term performance as well as various optical control accessories making it ideal choice for discreetly illuminating pathways and hardscapes.








DIMENSIONS	
Fixture Height with Trim	3.9" / 99 mm
Trim Width	3.3" / 84 mm
Trim Height	.5" / 13 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.7 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Hex Louver (Included); Lenses: Blue, Green, Red, Optical Lenses: Diffuser Spread, Linear Spread, Solite Soft Focus, Sandblasted
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



HOUSING ALONE

WITH CONCRETE POUR

MOUNTING & ACCESSORIES



CONCRETE POUR SL661



GRASS SHIELD SL663BZ, SL663HAB, SL663NC



HEX LOUVER IN-GRADE (INCLUDED)

SL676



COLORED LENS SL671BL, SL671GR, SL671RD



LENS DIFFUSERS SL6106DF, SL6106LL, SL6706SF, SL6106SB

ORDERING INFORMATION

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL635 SHAVER 11 FIXED WITH GRILL	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B5 LED LAMP MR11 3W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN RD RED DF DIFFUSER SPREAD LENS LL LINEAR SPREAD LENS SF SOLITE SOFT FOCUS LENS SB SANDBLASTED LENS	NG NO GRASS SHIELD G2 GRASS SHIELD



Shaver 16 Fixed 90° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with 90° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 90° aperture provides controlled directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS	
Fixture Height with Trim	4.4" / 112 mm
Trim Width	4" / 102 mm
Trim Height	.8" / 20 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.4 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES







GRASS SHIELD SL662BZ, SL662HAB, SL662NC



COLORED LENS SL670BL, SL670GR, SL670RD

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL636 SHAVER 16 FIXED 90° APERTURE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B3 LED LAMP MR16 5W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN RD RED	NG NO GRASS SHIELD G1 GRASS SHIELD



Shaver 11 Fixed 90° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with 90° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 90° aperture provides controlled directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS	
Fixture Height with Trim	4.1" / 104 mm
Trim Width	3.3" / 84 mm
Trim Height	.7" / 18 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.8 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES







SL663BZ, SL663HAB,

SL663NC



COLORED LENS SL671BL, SL671GR, SL671RD

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL637 SHAVER 11 FIXED 90° APERTURE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B5 LED LAMP MR11 3W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN RD RED	NG NO GRASS SHIELD G2 GRASS SHIELD



Shaver 16 Fixed Opposite 90° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with Opposite 90° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its opposite 90° aperture provides controlled bi-directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS Fixture Height with Trim
Trim Width 4" / 102 mm Trim Height .8" / 20 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 2.4 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Trim Height 8.8" / 20 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 2.4 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 2.4 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 2.4 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 2.4 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Operating Temperature Page Andrew Natural Copper 8 AwG, 36" Page Andrew Natural Copper Natural Copper MR16 LED (Sold Separately) 495 WATTALL COPPER ASSEMBLY ASSEM
Weight 2.4 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Ves Operating Temperature -30°C min -40°C max
Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
LAMPING Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Lamp Type MR16 LED (Sold Separately) Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CR1 Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Lumens 495 Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Watts 5W Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Voltage 12V Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Lead Wire 18 AWG, 36" Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Dimming MLV CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
CCT 2700K Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Color Quality 90 CRI Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Color Binning 3 Step Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Field Serviceable LED Yes Operating Temperature -30°C min -40°C max
Operating Temperature -30°C min -40°C max
LED Lifetime 36,000 Hours
OPTIONS
Mounting Concrete Pour, Grass Shield
Optical Controls Lenses: Blue, Green, Red
Lifetime warranty on manufacturer defects i WARRANTY the construction, but normal warranty applie for bulbs, integrated LEDs and living finishes

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



CONCRETE POUR SL660



GRASS SHIELD SL662BZ, SL662HAB,

SL662NC



COLORED LENS SL670BL, SL670GR, SL670RD

PRODU	JCT	FINIS	SH	LAI	1P	LEI	NS	GR	ASS SHIELD
SL638	SHAVER 16 FIXED OPPOSITE 90° APERTURE	BZ HAB	BRONZE HAND-RUBBED ANTIQUE BRASS		NO LAMP LED LAMP MR16 5W 36°	NL BL	NO LENS BLUE	NG G1	NO GRASS SHIELD GRASS SHIELD
		NC	NATURAL COPPER		90 CRI 2700K	GR RD	GREEN RED		



Shaver 11 Fixed Opposite 90° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed with Opposite 90° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its opposite 90° aperture provides controlled bi-directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.








DIMENSIONS	
Fixture Height with Trim	4.1" / 104 mm
Trim Width	3.3" / 84 mm
Trim Height	.7" / 18 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.8 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



5.7 max fc 61.4 max lux 5.7 max fc 0.5 fc (5.4 lux)
61.4 max lux 0.2 fc (2.2 lux)
Shaver 11 Fixed 180° Opposite, 3W 0.1 fc (1.1 lux)

MOUNTING & ACCESSORIES



SL661







GRASS SHIELD SL663BZ, SL663HAB, SL663NC

COLORED LENS SL671BL, SL671GR, SL671RD

PRODU	JCT	FINIS	SH	LAI	MP	LE	NS	GR	ASS SHIELD
SL639	SHAVER 11 FIXED OPPOSITE 90° APERTURE	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER		NO LAMP LED LAMP MR11 3W 36° 90 CRI 2700K	BL	NO LENS BLUE GREEN RED	NG G2	NO GRASS SHIELD GRASS SHIELD



Shaver 16 Fixed 180° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with 180° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 180° aperture provides controlled directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS					
Fixture Height with Trim	4.4" / 112 mm				
Trim Width	4" / 102 mm				
Trim Height	.8" / 20 mm				
MATERIAL					
Material	Brass or Copper				
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper				
Weight	2.4 lbs				
SOCKET					
Assembly	Ceramic with spring-reinforced electrical connection				
LAMPING					
Lamp Type	MR16 LED (Sold Separately)				
Lumens	495				
Watts	5W				
Voltage	12V				
Lead Wire	18 AWG, 36"				
Dimming	MLV				
ССТ	2700K				
Color Quality	90 CRI				
Color Binning	3 Step				
Field Serviceable LED	Yes				
Operating Temperature	-30°C min -40°C max				
LED Lifetime	36,000 Hours				
OPTIONS					
Mounting	Concrete Pour, Grass Shield				
Optical Controls	Lenses: Blue, Green, Red				
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.				

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



CONCRETE POUR SL660



GRASS SHIELD SL662BZ, SL662HAB, SL662NC



COLORED LENS

SL670BL, SL670GR, SL670RD

PRODU	JCT	FINIS	SH	LA	MP	LEI	NS	GR	ASS SHIELD
SL640	SHAVER 16 FIXED 180° APERTURE	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER		NO LAMP LED LAMP MR16 5W 36° 90 CRI 2700K	BL	NO LENS BLUE GREEN RED	NG G1	NO GRASS SHIELD GRASS SHIELD



Shaver 11 Fixed 180° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed with 180° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 180° aperture provides controlled directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









Fixture Height with Trim 4.1" / 112 mm Trim Width 3.3" / 84 mm Trim Height .7" / 18 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING Lamp Type MRII LED (Sold Separately)	
Trim Width 3.3" / 84 mm Trim Height .7" / 18 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection	
Trim Height .7" / 18 mm MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING	
MATERIAL Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING	
Material Brass or Copper Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING	
Finish Bronze, Hand-Rubbed Antique Brass or Natural Copper Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection	
Weight 1.8 lbs SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING	
SOCKET Assembly Ceramic with spring-reinforced electrical connection LAMPING	
Assembly Ceramic with spring-reinforced electrical connection LAMPING	
Assembly electrical connection LAMPING	
Lamp Type MR11 LED (Sold Separately)	
Lumens 270	
Watts 3W	
Voltage 12V	
Lead Wire 18 AWG, 36"	
Dimming MLV	
CCT 2700K	
Color Quality 90 CRI	
Color Binning 3 Step	
Field Serviceable LED Yes	
Operating Temperature -30°C min -40°C max	
LED Lifetime 25,000 Hours	
OPTIONS	
Mounting Concrete Pour, Grass Shield	
Optical Controls Lenses: Blue, Green, Red	
WARRANTY Lifetime warranty on manufacturer defect the construction, but normal warranty ap for bulbs, integrated LEDs and living finis	

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES









CONCRETE POUR GRASS SHIELD SL661

SL663BZ, SL663HAB, SL663NC

COLORED LENS SL671BL, SL671GR, SL671RD

PRODUCT	FINI	SH	LAI	MP	LEI	NS	GR	ASS SHIELD
SL641 SHAVER 11 FIXED 180° APERTURE		BRONZE HAND-RUBBED ANTIQUE BRASS		NO LAMP LED LAMP MR11 3W 36°	BL	NO LENS BLUE		NO GRASS SHIELD GRASS SHIELD
	NC	NATURAL COPPER		90 CRI 2700K		GREEN		



Shaver 16 Fixed 270° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with 270° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 270° aperture provides controlled multi-directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS	
Fixture Height with Trim	4.4" / 112 mm
Trim Width	4" / 102 mm
Trim Height	.8" / 20 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.2 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL642 SHAVER 16 FIXED 270° APERTURE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRAS	NB NO LAMP S B3 LED LAMP MR16 5W 36°	NL NO LENS BL BLUE	NG NO GRASS SHIELD G1 GRASS SHIELD
	NC NATURAL COPPER	90 CRI 2700K	GR GREEN RD RED	



Shaver 11 Fixed 270° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed with 270° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 270° aperture provides controlled multi-directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS	
Fixture Height with Trim	4.1" / 104 mm
Trim Width	3.3" / 84 mm
Trim Height	.7" / 18 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.6 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES







GRASS SHIELD SL663BZ, SL663HAB, SL663NC



COLORED LENS SL671BL, SL671GR, SL671RD

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL643 SHAVER 11 FIXED 270° APERTURE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B5 LED LAMP MR11 3W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN RD RED	NG NO GRASS SHIELD G2 GRASS SHIELD



Shaver 16 Fixed 360° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 16 Fixed with 360° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 360° aperture provides controlled multi-directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS	
Fixture Height with Trim	4.4" / 112 mm
Trim Width	4" / 102 mm
Trim Height	.8" / 20 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2.2 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495
Watts	5W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



ORDERING INFORMATION

PRODUCT	FINISH	LAMP	LENS	GRASS SHIELD
SL644 SHAVER 16 FIXED 360° APERTURE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B3 LED LAMP MR16 5W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN BD RED	NG NO GRASS SHIELD G1 GRASS SHIELD



Shaver 11 Fixed 360° Aperture

DIRECTIONAL MARKER

DESIGNER: SEAN LAVIN

The Shaver 11 Fixed with 360° Aperture Directional Marker features a low-profile design, expertly crafted from durable brass or copper for secure in-grade installation with optional concrete pour kit and grass shield mounting accessories. Its 360° aperture provides controlled multi-directional illumination, offering a subtle lighting solution for driveways, walkways, and pathways while effectively highlighting hardscape features.









DIMENSIONS	
Fixture Height with Trim	4.1" / 104 mm
Trim Width	3.3" / 84 mm
Trim Height	.7" / 18 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.6 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	MR11 LED (Sold Separately)
Lumens	270
Watts	3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
OPTIONS	
Mounting	Concrete Pour, Grass Shield
Optical Controls	Lenses: Blue, Green, Red
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



LIGHT DISTRIBUTION



MOUNTING & ACCESSORIES



SL661





GRASS SHIELD SL663BZ, SL663HAB, SL663NC

COLORED LENS SL671BL, SL671GR, SL671RD

ORDERING INFORMATION

PRODUCT	FINISH LAMP		LENS	GRASS SHIELD		
SL645 SHAVER 11 FIXED 360° APERTURE	BZ BRONZE HAB HAND-RUBBED ANTIQUE BRASS NC NATURAL COPPER	NB NO LAMP B5 LED LAMP MR11 3W 36° 90 CRI 2700K	NL NO LENS BL BLUE GR GREEN	NG NO GRASS SHIELD G2 GRASS SHIELD		



HARDSCAPE LIGHTING



Brooks 6"

DESIGNER: SEAN LAVIN

The Brooks 6" Hardscape Light is a compact, low-profile fixture designed for seamless integration beneath capstones, stair treads, or wall ledges. It mounts securely using a stainless-steel bracket prior to final hardscape placement. Expertly constructed from solid brass or copper, Brooks features an integrated LED module light engine to deliver consistent linear illumination. Engineered for durability and visual comfort, Brooks enhances safety while accentuating architectural features of outdoor spaces.







DIMENSIONS	
Fixture Height	.9" / 23 mm
Fixture Width	6" / 152 mm
Fixture Depth	3.2" / 81 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	148
Watts	3.1W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODU	ІСТ	FINIS	н	LA	MPING
SL646	BROOKS 6" HARDSCAPE	BZ HAB NC	BRONZE HAND-RUBBED ANTIQUE BRASS NATURAL COPPER	L1	INTEGRATED LED 3.1W 90 CRI 2700K



Brooks 12"

DESIGNER: SEAN LAVIN

The Brooks 12" Hardscape Light offers the same refined integration as the 6" model, in a longer form factor ideal for broader applications such as extended wall runs, seat walls, or wide stair treads. It mounts using a stainless-steel bracket for secure installation prior to capstone placement. Made from solid brass or copper, Brooks features an integrated LED module light engine to deliver consistent linear illumination. Engineered for durability and visual comfort, Brooks enhances safety while accentuating architectural features of outdoor spaces.








DIMENSIONS	
Fixture Height	.9" / 23 mm
Fixture Width	12" / 305 mm
Fixture Depth	3.2" / 81 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	1.5 lbs
LAMPING	
Lamp Type	Integrated LED
Lumens	227
Watts	5.2W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT		FINIS	н	LA	MPING
SL647 BR	OOKS 12" HARDSCAPE	BZ	BRONZE	L1	INTEGRATED LED 5.2W 90 CRI 2700K
		HAB	HAND-RUBBED ANTIQUE BRASS		
		NC	NATURAL COPPER		





Brooks 18"

DESIGNER: SEAN LAVIN

The Brooks 18" Hardscape Light is the longest of the series, designed to deliver broad, even illumination across long runs of seat walls, retaining walls, or wide steps. It installs with the same stainless steel mounting bracket system, ensuring secure placement beneath capstones or ledges. Made from solid brass or copper, Brooks features an integrated LED module light engine to deliver consistent linear illumination. Its extended length minimizes fixture count while providing uniform, low-glare lighting that enhances safety and architectural features across expansive surfaces.








DIMENSIONS	
Fixture Height	.9" / 23 mm
Fixture Width	18" / 457 mm
Fixture Depth	3.2" / 81 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	2 lbs
LAMPING	
Lamp Type	Integrated LED
Lumens	297
Watts	7.2W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT	FINIS	SH	LAMPING	
SL648 BROOKS 18" HARDSCAPE	BZ HAB	BRONZE HAND-RUBBED ANTIQUE BRASS	L1 INTEGRATED LED 7.2W 90 CRI 2700K	
	NC	NATURAL COPPER		





STEP LIGHTING



Kaidan Square Aperture

12V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Square Aperture 12V Step Light features a concealed light source that provides gentle, downward illumination to enhance safety and ambiance in outdoor environments. Amber integrated LED module light engine is ideal for coastal and spectrum-sensitive applications. Expertly crafted from durable brass, copper, or aluminum, Kaidan is designed for seamless integration into steps and walls and fits into any standard single-gang junction box. Available in five finishes, it offers a sleek and versatile lighting solution for both residential and commercial settings.











DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	42
Watts	3.3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	Turtle (Amber 585-600nm)
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


 $[\]hbox{*Aluminum construction is used for Matte White and Nightshade Black Fixtures}.$

ORDERING INFORMATION

PRODU	ст	FINIS	SH	LAMP
SL6101	KAIDAN SQUARE APERTURE 12V STEP LIGHT	BZ HAB	BRONZE HAND-RUBBED ANTIQUE BRASS	TI INTEGRATED LED 3.3W TURTLE (AMBER 585-600NM)
		MW	MATTE WHITE*	
		NC	NATURAL COPPER	
		В	NIGHTSHADE BLACK*	

^{*}Nightshade Black and Matte White damp rated for indoor use.





Kaidan Square Aperture

120V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Square Aperture 120V Step Light features a concealed light source that delivers a uniform, downward illumination—enhancing safety along stairways, pathways, and wall perimeters. Designed to fit into any standard single-gang junction box, it is installed cleanly into masonry or architectural wall surfaces. Constructed from durable brass, copper, or aluminum, Kaidan is available in five finish options. The integrated 2700K LED module light engine provides a low-glare solution for residential and commercial step lighting applications.







HAND-RUBBED ANTIQUE BRASS



NATURAL COPPER



MATTE WHITE



NIGHTSHADE BLACK

DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	114
Watts	3.7W
Voltage	120V
Lead Wire	18 AWG, 36"
Dimming	ELV, TRIAC
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


^{**}Aluminum construction is used for Matte White and Nightshade Black Fixtures.

ORDERING INFORMATION

PRODUCT FIN			FINISH		LAMP	
SL655	KAIDAN SQUARE APERTURE	BZ	BRONZE	L1	I INTEGRATED LED 3.7W 90 CRI 2700K	
	120V STEP LIGHT	HAB	HAND-RUBBED ANTIQUE BRASS			
		MW	MATTE WHITE*			
		NC	NATURAL COPPER			
		В	NIGHTSHADE BLACK*			

^{*}Nightshade Black and Matte White damp rated for indoor use.






Kaidan Hex Aperture

12V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Hex Aperture 12V Step Light features a concealed light source that provides gentle, downward illumination to enhance safety and ambiance in outdoor environments. The hexagonal faceplate maintains low-glare performance while the integrated amber LED module light engine provides an ideal solution for coastal and spectrum-sensitive applications. Expertly crafted from durable brass, copper, or aluminum, Kaidan is designed for seamless integration into steps and walls and fits into any standard single-gang junction box. Available in five finishes, it offers a sleek and versatile lighting solution for both residential and commercial settings.







HAND-RUBBED ANTIQUE BRASS



NATURAL COPPER



MATTE WHITE



NIGHTSHADE BLACK

DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	42
Watts	3.3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	Turtle (Amber 585-600nm)
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


 $[\]hbox{*Aluminum construction is used for Matte White and Nightshade Black Fixtures}.$

ORDERING INFORMATION

PRODUCT F			NISH		LAMP		
SL6103	KAIDAN HEX APERTURE	BZ	BRONZE	T1	INTEGRATED LED 3.3W TURTLE (AMBER 585-600NM)		
	12V STEP LIGHT	HAB	HAND-RUBBED ANTIQUE BRASS				
		MW	MATTE WHITE*				
		NC	NATURAL COPPER				
		В	NIGHTSHADE BLACK*				

^{*}Nightshade Black and Matte White damp rated for indoor use.






Kaidan Hex Aperture

120V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Hex Aperture 120V Step Light features a concealed light source that delivers a uniform, downward illumination—enhancing safety along stairways, pathways, and wall perimeters. Its hexagonal faceplate ensures low-glare illumination while providing optimal visual comfort. Designed to fit into any standard single-gang junction box, it is installed cleanly into masonry or architectural wall surfaces. Constructed from durable brass, copper, or aluminum, Kaidan is available in five finish options. The integrated 2700K LED module light engine offers an ideal solution for residential and commercial step lighting applications.







HAND-RUBBED ANTIQUE BRASS



NATURAL COPPER



MATTE WHITE



NIGHTSHADE BLACK

DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	114
Watts	3.7W
Voltage	120V
Lead Wire	18 AWG, 36"
Dimming	ELV, TRIAC
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

^{**}Aluminum construction is used for Matte White and Nightshade Black Fixtures.

ORDERING INFORMATION

PRODUCT FINI			SH	LAMP	
SL657	KAIDAN HEX APERTURE	BZ	BRONZE		L1 INTEGRATED LED 3.7W 90 CRI 2700K
	120V STEP LIGHT	HAB	HAND-RUBBED ANTIQUE BRASS		
		MW	MATTE WHITE*		
		NC	NATURAL COPPER		
		В	NIGHTSHADE BLACK*		

^{*}Nightshade Black and Matte White damp rated for indoor use.



Kaidan Round Aperture

12V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Round Aperture 12V Step Light features a half-circle cut-out faceplate that provides gentle, downward illumination to enhance safety and ambiance in outdoor environments. The integrated amber LED light engine provides an ideal solution for coastal and spectrum-sensitive applications. Expertly crafted from durable brass, copper, or aluminum, Kaidan is designed for seamless integration into steps and walls and fits into any standard single-gang junction box. Available in five finishes, it offers a sleek and versatile lighting solution for both residential and commercial settings.













DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	42
Watts	3.3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	Turtle (Amber 585-600nm)
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


 $[\]hbox{*Aluminum construction is used for Matte White and Nightshade Black Fixtures}.$

ORDERING INFORMATION

PRODUCT F		FINISH		L	LAMP		
SL6102 KAIDAN ROU 12V STEP LIG			BRONZE HAND-RUBBED ANTIQUE BRASS	Т	1 INTEGRATED LED 3.3W TURTLE (AMBER 585-600NM)		
12V STEP LIC			MATTE WHITE*				
	-		NATURAL COPPER				
		В	NIGHTSHADE BLACK*				

^{*}Nightshade Black and Matte White damp rated for indoor use.





Kaidan Round Aperture

120V STEP LIGHT

DESIGNER: SEAN LAVIN


The Kaidan Round Aperture 120V Step Light features a half-circle cut-out faceplate that delivers a uniform, downward illumination—enhancing safety along stairways, pathways, and wall perimeters. Designed to fit into any standard single-gang junction box, it is installed cleanly into masonry or architectural wall surfaces. Constructed from durable brass, copper, or aluminum, Kaidan is available in five finish options. The integrated 2700K LED light engine offers an ideal solution for residential and commercial step lighting applications.







HAND-RUBBED ANTIQUE BRASS



NATURAL COPPER



MATTE WHITE



NIGHTSHADE BLACK

DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	114
Watts	3.7W
Voltage	120V
Lead Wire	18 AWG, 36"
DImming	ELV, TRIAC
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


^{**}Aluminum construction is used for Matte White and Nightshade Black Fixtures.

ORDERING INFORMATION

PRODUCT FIN			INISH		LAMP	
SL656	KAIDAN ROUND APERTURE	BZ	BRONZE	L1 INTE	GRATED LED 3.7W 90 CRI 2700k	
	120V STEP LIGHT	HAB	HAND-RUBBED ANTIQUE BRASS			
		MW	MATTE WHITE*			
		NC	NATURAL COPPER			
		В	NIGHTSHADE BLACK*			

 $^{{}^*\}mbox{Nightshade}$ Black and Matte White damp rated for indoor use.





Kaidan Triangle Aperture

12V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Triangle Aperture 12V Step Light features a triangular cut-out faceplate that provides gentle, downward illumination to enhance safety and ambiance in outdoor environments. The integrated amber LED light engine provides an ideal solution for coastal and spectrum-sensitive applications. Expertly crafted from durable brass, copper, or aluminum, Kaidan is designed for seamless integration into steps and walls and fits into any standard single-gang junction box. Available in five finishes, it offers a sleek and versatile lighting solution for both residential and commercial settings.







HAND-RUBBED ANTIQUE BRASS



NATURAL COPPER







NIGHTSHADE BLACK

DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	42
Watts	3.3W
Voltage	12V
Lead Wire	18 AWG, 36"
Dimming	MLV
ССТ	Turtle (Amber 585-600nm)
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


^{**}Aluminum construction is used for Matte White and Nightshade Black Fixtures.

ORDERING INFORMATION

PRODUCT FII		FINIS	FINISH		LAMP	
SL6104	KAIDAN TRIANGLE APERTURE	BZ	BRONZE	T1 INTEG	GRATED LED 3.3W TURTLE (AMBER 585-600NM)	
	12V STEP LIGHT	HAB	HAND-RUBBED ANTIQUE BRASS			
		MW	MATTE WHITE*			
		NC	NATURAL COPPER			
		В	NIGHTSHADE BLACK*			

^{*}Nightshade Black and Matte White damp rated for indoor use.





Kaidan Triangle Aperture

120V STEP LIGHT

DESIGNER: SEAN LAVIN

The Kaidan Triangle Aperture 120V Step Light features a triangular cut-out faceplate that delivers a uniform, downward illumination—enhancing safety along stairways, pathways, and wall perimeters. Designed to fit into any standard single-gang junction box, it is installed cleanly into masonry or architectural wall surfaces. Constructed from durable brass, copper, or aluminum, Kaidan is available in five finish options. The integrated 2700K LED module light engine offers an ideal solution for residential and commercial step lighting applications.



BRONZE



HAND-RUBBED ANTIQUE BRASS



NATURAL COPPER



MATTE WHITE



NIGHTSHADE BLACK

DIMENSIONS	
Fixture Height	3" / 76 mm
Fixture Width	5" / 127 mm
MATERIAL	
Material	Brass, Copper, or Aluminum**
Finish	Bronze, Hand-Rubbed Antique Brass, Matte White, Natural Copper, or Nightshade Black
Weight	1 lb
LAMPING	
Lamp Type	Integrated LED
Lumens	114
Watts	3.7W
Voltage	120V
Lead Wire	18 AWG, 36"
Dimming	ELV, TRIAC
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	No
Operating Temperature	-30°C min -40°C max
LED Lifetime	50,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.


^{**}Aluminum construction is used for Matte White and Nightshade Black Fixtures.

ORDERING INFORMATION

PRODUCT		FINIS	FINISH		LAMP		
SL658	KAIDAN TRIANGLE APERTURE	BZ	BRONZE	L1	I INTEGRATED LED 3.7W 90 CRI 2700K		
	120V STEP LIGHT	HAB	HAND-RUBBED ANTIQUE BRASS				
		MW	MATTE WHITE*				
		NC	NATURAL COPPER				
		В	NIGHTSHADE BLACK*				

^{*}Nightshade Black and Matte White damp rated for indoor use.





WALL & POST MOUNT LIGHTING



Sentinel Shallow

SURFACE MOUNT

DESIGNER: SEAN LAVIN

The Sentinel Shallow Wall/Post Mount is designed to complement the Sentinel Pathway Lights, offering a coordinated lighting solution for vertical surfaces such as walls and posts. Its clean, low-profile form matches the path light's rounded silhouette, maintaining visual consistency across the landscape. Engineered for secure surface installation with a canopy that can cover standard round junction box, it delivers soft, controlled illumination that enhances architectural features while minimizing glare. Built for durability and available in matching finishes, it provides a compact, functional lighting solution.







WALL MOUNT

SURFACE MOUNT

DIMENSIONS	
Fixture Height	4.2" / 107 mm
Fixture Diameter	4.8" / 122 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.7 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	120V
Lead Wire	18 AWG, 8"
Dimming	ELV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT		FINIS	FINISH		LAMPING	
SL653	SENTINEL SHALLOW SURFACE MOUNT	BZ	BRONZE	NB	NO LAMP	
		HAB	HAND-RUBBED ANTIQUE BRASS	B1	LED LAMP G4 1.5W 90 CRI 2700K	
		NC	NATURAL COPPER	B2	LED LAMP G4 5W 90 CRI 2700K	



Sentinel Deep

SURFACE MOUNT

DESIGNER: SEAN LAVIN

The Sentinel Deep Wall/Post Mount is designed to pair with the Sentinel Pathway Lights, offering a taller profile for added presence on walls and vertical surfaces. Its rounded form mirrors the path light's silhouette, maintaining a cohesive aesthetic throughout the landscape. Engineered for secure surface installation with a canopy that can cover standard round junction box, it delivers soft, downward illumination that enhances architectural elements while reducing glare. Durable and available in matching finishes, it provides a refined and functional lighting solution for outdoor environments.








Fixture Diameter 4. MATERIAL Material B Finish B	5.2" / 132 mm 8.8" / 122 mm Brass or Copper Bronze, Hand-Rubbed Antique Brass or
Fixture Diameter 4. MATERIAL Material B Finish B	8.8" / 122 mm
MATERIAL Material B Finish B	Brass or Copper
Material B	
Finish	
Finish	Pronzo Hand-Pubbod Antique Prace or
N N	Natural Copper
Weight 4	1.4 lbs
SOCKET	
	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type G	64 LED (Sold Separately)
Lumens 15	50, 550
Watts 1.	.5W, 5W
Voltage 12	20V
Lead Wire	8 AWG, 8"
Dimming E	ELV
CCT 2	700K
Color Quality 9	00 CRI
Color Binning 3	Step
Field Serviceable LED Ye	⁄es
Operating Temperature -3	30°C min -40°C max
LED Lifetime 25	25,000 Hours
WARRANTY	ifetime warranty on manufacturer defects in he construction, but normal warranty applies or bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT		FINIS	FINISH		LAMP	
SL652	SENTINEL DEEP SURFACE MOUNT	BZ	BRONZE	NB	NO LAMP	
		HAB	HAND-RUBBED ANTIQUE BRASS	B1	LED LAMP G4 1.5W 90 CRI 2700K	
		NC	NATURAL COPPER	B2	LED LAMP G4 5W 90 CRI 2700K	





Balsam SURFACE MOUNT

DESIGNER: SEAN LAVIN

The Balsam Wall/Post Mount is designed to complement the Balsam Pathway Light, creating a cohesive outdoor lighting solution. Its shade features soft corners that transition seamlessly into straight lines, matching the pathway version for a unified look. Engineered for secure surface installation with a canopy that can cover standard round junction box, it directs light downward or back at a wall to minimize glare while effectively illuminating walls and posts. Built for durability and available in three finishes, it provides functional and visually integrated lighting for outdoor spaces.








SPECIFICATIONS

DIMENSIONS	
Fixture Height	5.4" / 137 mm
Fixture Diameter	4.8" / 122 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.9 lbs
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	120V
Lead Wire	18 AWG, 8"
Dimming	ELV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT FINISH		LAMP		
SL651 BALSAM SURFACE MOUNT	BZ B	RONZE	NB	NO LAMP
	HAB H	IAND-RUBBED ANTIQUE BRASS	B1	LED LAMP G4 1.5W 90 CRI 2700K
	NC N	IATURAL COPPER	B2	LED LAMP G4 5W 90 CRI 2700K





Plateau Wide

SURFACE MOUNT

DESIGNER: SEAN LAVIN

The Plateau Wide Wall/Post Mount is designed to complement the Plateau Pathway Light, offering a cohesive solution for illuminating walls, posts, and other vertical surfaces. Its domeshaped shade mirrors the path light's organic form, creating visual continuity across the landscape. Engineered for secure surface installation with a canopy that can cover standard round junction box, it delivers soft, wide illumination ideal for enhancing architectural elements. Constructed for durability and available in matching finishes, it blends form and function in a streamlined outdoor lighting solution.








SPECIFICATIONS

DIMENSIONS	
Fixture Height	4" / 102 mm
Fixture Diameter	7.8" / 198 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.4 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced electrical connection
LAMPING	
Lamp Type	G4 LED (Sold Separately)
Lumens	150, 550
Watts	1.5W, 5W
Voltage	120V
Lead Wire	18 AWG, 8"
Dimming	ELV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	25,000 Hours
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

ORDERING INFORMATION

PRODUCT	FINI	SH	LAI	MP
SL654 PLATEAU WIDE SURFACE MOUNT	BZ	BRONZE	NB	NO LAMP
	HAE	HAND-RUBBED ANTIQUE BRASS	B1	LED LAMP G4 1.5W 90 CRI 2700K
	NC	NATURAL COPPER	B2	LED LAMP G4 5W 90 CRI 2700K





FLUSH MOUNT LIGHTING



Maxson SQUARE FLUSH MOUNT

DESIGNER: SEAN LAVIN

The Maxson Square Flush Mount features a compact, geometric form with a recessed light source coupled with hex louver to minimize glare and enhance visual comfort. Its crisp lines and low-profile design integrate seamlessly into ceilings, soffits, or overhangs—delivering functional downlighting with a clean architectural presence. Available in three finished options and built for durability, Maxson Square offers a modern, versatile solution for exterior or transitional spaces.







HAND-RUBBED ANTIQUE BRASS




NATURAL COPPER

SPECIFICATIONS

DIMENSIONS	
Fixture Height	4.7" / 119 mm
Fixture Diameter	4.7" / 119 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	4.6 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced eletrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495, 507
Watts	5W
Voltage	120V
Lead Wire	18 AWG, 8"
Dimming	ELV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Optical Controls	Hex Louver (Included)
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



HEX LOUVER (INCLUDED)

SL674

ORDERING INFORMATION

PRODUCT	FINISH	LAMPING
SL650 MAXSON SQUARE FLUSH MOUNT	BZ BRONZE	NB NO LAMP
	HAB HAND-RUBBED ANTIQUE BRASS	B3 LED LAMP MR16 5W 36° 90 CRI 2700K
	NC NATURAL COPPER	B4 LED LAMP MR16 5W 60° 90 CRI 2700K

HEX LOUVER INCLUDED.



Maxson ROUND FLUSH MOUNT

DESIGNER: SEAN LAVIN

The Maxson Round Flush Mount features a compact, beveled design with a recessed light source coupled with hex louver to reduce glare and enhance visual comfort. Its low-profile, modern form integrates cleanly into ceilings and overhangs, delivering functional downlighting for a variety of architectural applications. Engineered for durability and available in three finish options, Maxson Round offers a sleek, versatile solution for exterior or transitional spaces.








SPECIFICATIONS

DIMENSIONS	
Fixture Height	4.7" / 119 mm
Fixture Diameter	4.7" / 119 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass or Natural Copper
Weight	3.8 lbs
SOCKET	
Assembly	Ceramic with spring-reinforced eletrical connection
LAMPING	
Lamp Type	MR16 LED (Sold Separately)
Lumens	495, 507
Watts	5W
Voltage	120V
Lead Wire	18 AWG, 8"
Dimming	ELV
ССТ	2700K
Color Quality	90 CRI
Color Binning	3 Step
Field Serviceable LED	Yes
Operating Temperature	-30°C min -40°C max
LED Lifetime	36,000 Hours
OPTIONS	
Optical Controls	Hex Louver (Included)
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs and living finishes.

DIMENSIONS



MOUNTING & ACCESSORIES



HEX LOUVER (INCLUDED)

SL672

ORDERING INFORMATION

PRODUCT	FINISH	LAMPING
SL649 MAXSON ROUND FLUSH MOUNT	BZ BRONZE	NB NO LAMP
	HAB HAND-RUBBED ANTIQUE BRASS	B3 LED LAMP MR16 5W 36° 90 CRI 2700K
	NC NATURAL COPPER	B4 LED LAMP MR16 5W 60° 90 CRI 2700K

HEX LOUVER INCLUDED.



ACCESSORIES



1" Standard Riser & 2" Modern Riser

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN



SPECIFICATIONS


DIMENSIONS	
Actual Height	18", 22", 28"/457 mm, 559 mm, 711 mm 18", 22" / 457 mm, 559 mm
Actual Width	1", 1.9" / 25 mm, 48 mm
MATERIAL	
Material	Brass or Copper
Finish	Bronze, Hand-Rubbed Antique Brass, or Natural Copper
Weight	.8, .9, 1.1 lbs / 2.4, 2.7 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODU	СТ	RISE	R HEIGHT	FINIS	н
SL694	1" DIAMETER	R11	15" (1" DIA.)	BZ	BRONZE
	STANDARD RISER	R12	18" (1" DIA.)	HAB	HAND-RUBBED
		R13	24" (1" DIA.)		ANTIQUE BRASS
SL695	2" DIAMETER	R21	15" (1.9" DIA.)	NC	NATURAL COPPER
	MODERN RISER	R22	18" (1.9" DIA.)		

2" MODERN RISER





Heavy-Duty Stake

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN




SPECIFICATIONS

DIMENSIONS	
Height	13" / 330 mm
Width	3.2" / 81 mm
MATERIAL	
Material	ABS Plastic with Solid Brass Threading
Weight	.5 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL659 13" HEAVY-DUTY GROUND STAKE




Trident Spike

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN








SPECIFICATIONS

DIMENSIONS	
Height	12.9" / 328 mm
Width	5" / 127 mm
MATERIAL	
Material	Brass or Copper
Weight	Bronze and Hand-Rubbed Antique Brass — 1.8 lbs Natural Copper — 2.2 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT	FINISI	н
SL6122 12" TRIDENT SPIKE	BZ	BRONZE
	HAB	HAND-RUBBED
		ANTIQUE BRASS
	NC	NATURAL COPPER



Arbor Tree Mount Screw-In

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN




SPECIFICATIONS

DIMENSIONS	
Height	2.1" / 53 mm
Width	1.4" / 36 mm
MATERIAL	
Material	Brass and Stainless Steel or Copper and Stainless Steel
Finish	Bronze, Hand-Rubbed Antique Brass, or Natural Copper
Weight	.4 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PROD	ист	FINIS	Н
SL665	ARBOR TREE MOUNT SCREW-IN	BZ HAB	BRONZE HAND-RUBBED
		NC	ANTIQUE BRASS NATURAL COPPER



Arbor Tree & Surface Mount

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN








SPECIFICATIONS

DIMENSIONS	
Height	1.1" / 28 mm
Width	6" / 152 mm
MATERIAL	
Material	Brass or Copper
Hardware	Brass and Stainless Steel or Copper and Stainless Steel
Finish	Bronze, Hand-Rubbed Antique Brass, or Natural Copper
Weight	.5 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT		FINISH	
SL664	ARBOR TREE & SURFACE MOUNT	BZ	BRONZE
		HAB	HAND-RUBBED
			ANTIQUE BRASS
		NC	NATURAL COPPER



Arbor Bungee Strap

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN








SPECIFICATIONS

DIMENSIONS	
Height	1" / 25 mm
Width	3" / 76 mm
MATERIAL	
Material	Brass or Copper
Hardware	Stainless Steel and Rubber
Finish	Bronze, Hand-Rubbed Antique Brass, or Natural Copper
Weight	1.9 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODU	ІСТ	FINIS	Н
SL666	ARBOR BUNGEE STRAP	BZ	BRONZE
		HAB	HAND-RUBBED ANTIQUE BRASS
		NC	NATURAL COPPER



Arbor Gutter Mount

LANDSCAPE ACCESSORY



SPECIFICATIONS

DIMENSIONS	
Height	2.7" / 69 mm
Width	3.5" / 89 mm
MATERIAL	
Material	Stainless Steel
Weight	.2 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes

ORDERING INFORMATION

PRODU	JCT	FIN	ISH
SL667	ARBOR GUTTER MOUNT	SS	STAINLESS STEEL





Deck/Surface Mount

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN







SPECIFICATIONS

DIMENSIONS	
Height	1" / 25 mm
Width	2.5" / 64 mm
MATERIAL	
Material	Brass or Copper
Hardware	Stainless Steel
Finish	Bronze, Hand-Rubbed Antique Brass, or Natural Copper
Weight	.6 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT		FINISH	
SL668	ARBOR DECK MOUNT	BZ	BRONZE
		HAB	HAND-RUBBED ANTIQUE BRASS
		NC	NATURAL COPPER



Micro Spot Flange

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN








SPECIFICATIONS

DIMENSIONS	
Height	1.1" / 28 mm
Width	2.4" / 61 mm
MATERIAL	
Material	Brass or Copper
Weight	.1 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT		FINIS	FINISH	
SL692	MICRO SPOT FLANGE	BZ	BRONZE	
		HAB	HAND-RUBBED ANTIQUE BRASS	
		NC	NATURAL COPPER	



Grass Shield

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

SHAVER 11 GRASS SHIELD







SHAVER 16 GRASS SHIELD








SPECIFICATIONS

DIMENSIONS	
Inner Diameter	2.8" / 71 mm 3.5" / 89 mm
Outer Diameter	9.4" / 239 mm 9.8" / 250 mm
MATERIAL	
Material	Brass or Copper
Material Finish	Brass or Copper Bronze, Hand-Rubbed Antique Brass, or Natural Copper
	Bronze, Hand-Rubbed Antique Brass, or

ORDERING INFORMATION

PRODUCT		FINISH	
SL663	SHAVER 11 GRASS SHIELD*	BZ	BRONZE
SL662	SHAVER 16 GRASS SHIELD**	HAB	HAND-RUBBED ANTIQUE BRASS
		NC	NATURAL COPPER

^{*}FOR USE WITH SHAVER MR11 IN-GRADE LIGHTS. **FOR USE WITH SHAVER MR16 IN-GRADE LIGHTS.



Concrete Pours

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

SHAVER 11 CONCRETE POUR



SPECIFICATIONS

DIMENSIONS	
Height	8.1" / 206 mm 8.6" / 218 mm
Width	3" / 76 mm 3.7" / 94 mm
MATERIAL	
Material	ABS Plastic
Weight	.3 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.


ORDERING INFORMATION

PRODUCT

SL661 SHAVER 11 CONCRETE POUR SL660 SHAVER 16 CONCRETE POUR

SHAVER 16 CONCRETE POUR





Concrete Anchors

LANDSCAPE ACCESSORY




SPECIFICATIONS

DIMENSIONS	
Height	8.1" / 206 mm
Width	1.1" / 28 mm
MATERIAL	
Material	Hot Dip Galvanized Steel
Weight	.6 lb each
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL689 CONCRETE ANCHORS, SET OF 3



5" & 12" Stainless Steel Spikes

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

5" STAINLESS STEEL SPIKES



12" STAINLESS STEEL SPIKES



SPECIFICATIONS

DIMENSIONS	
Height	5" / 127 mm 12.6" / 320 mm
Width	.2" / 5 mm .4" / 10 mm
MATERIAL	
Material	Stainless Steel
Weight	.1 lbs & 1.5 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL690 5" STAINLESS STEEL SPIKES, SET OF 3 SL699 12" STAINLESS STEEL SPIKES, SET OF 3



Cut-Off Reflector

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN



SPECIFICATIONS

DIMENSIONS	
Height	1.6" / 41 mm
Width	2.1" / 53 mm
MATERIAL	
Material	Aluminum
Weight	.03 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODU	JCT	FINISH
SL669	PATHWAY LIGHT REFLECTOR	AL ALUMINUM



Color Lenses

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

MR11 LENSES







MR16 LENSES







SPECIFICATIONS

DIMENSIONS	
Diameter	MR11: 1.4" / 36 mm MR16: 2" / 51 mm
Width	MR11 .1" / 2.5 mm MR16 .1" / 2.5 mm
MATERIAL	
Material	Acrylic
Weight	.03 lbs
	Lifetime warranty on manufacturer defects in

ORDERING INFORMATION

PRODUCT	FINISH
SL671 MR11 COLORED DIFFUSER	BL BLUE
SL670 MR16 COLORED DIFFUSER	GR GREEN
	RD RED



Lens Diffusers

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

MR11 LENSES









LINEAR SPREAD

SANDBLASTED

MR16 LENSES









DIFFUSER SPREAD

SOLITE SOFT FOCUS

SPECIFICATIONS

DIMENSIONS	
Diameter	MR11: 1.4" / 36 mm MR16: 2" / 51 mm
Width	MR11: .1" / 2.5 mm MR16: .1" / 2.5 mm
MATERIAL	
Material	Acrylic
Weight	.03 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT		FIN	FINISH	
SL6106	MR11 LENS	DF	DIFFUSER SPREAD LENS	
SL6105	MR16 LENS	LL	LINEAR SPREAD LENS	
		SB	SANDBLASTED LENS	
		SF	SOLITE SOFT FOCUS LENS	



Hex Louvers

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN















TULE HEX LOUVER MR11 HEX LOUVER IN-GRADE

MR11 HEX LOUVER

UVER MR16 SQUARE HEX LOUVER

SPECIFICATIONS

DIMENSIONS	
Diameter / Length	.9" / 23 mm 1.4" / 36 mm 1.7" / 43 mm 2" / 51 mm 2.2" / 56 mm 2.2" / 56 mm 3.4" / 86 mm
MATERIAL	
Material	ABS Plastic
Weight	.03 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.


ORDERING INFORMATION

PRODUCT

LANDSCAPE COLLECTION

SL693 TULE HEX LOUVER
SL676 MR11 ROUND HEX LOUVER IN-GRADE
SL673 MR11 ROUND HEX LOUVER
SL675 MR16 ROUND HEX LOUVER IN-GRADE
SL672 MR16 ROUND HEX LOUVER
SL674 MR16 SQUARE HEX LOUVER

SL677 WALL WASH HEX LOUVER



Wall Wash Horizontal & Vertical Spread

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

HORIZONTAL SPREAD



VERTICAL SPREAD




SPECIFICATIONS

DIMENSIONS	
Height	1.5" / 38 mm
Width	3.7" / 94 mm
MATERIAL	
Material	Acrylic
Weight	.1 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL678 WALL WASH HORIZONTAL SPREAD SL679 WALL WASH VERTICAL SPREAD



10AWG & 14AWG Wire

LANDSCAPE ACCESSORY

10AWG WIRE









14AWG WIRE







SPECIFICATIONS

DIMENSIONS	
Gauge	10AWG or 14AWG
Length	250', 500', 1000'
MATERIAL	
Material	Copper and PVC
Weight	10AWG: 250' spool: 26 lbs; 500' spool: 52 lbs; 1000' spool: 104lbs 14AWG: 250' spool: 10.2 lbs; 500' spool: 20.4lbs; 1000' spool: 40.8lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT		LENG	TH
	10AWG WIRE 14AWG WIRE	250 500	200
		1000	1000′

150W & 300W Transformer

LANDSCAPE ACCESSORY

DESIGNER: SEAN LAVIN

SPECIFICATIONS

VOLTAGE	
Input Voltage	120V: 120V AC 50/60Hz
Output Voltage	120V: 12V AC
CURRENT	
Input Current	120V: 1.25A (150W) 120V: 2.5A (300W)
Output Current	150W: 12.5A 300W: 25A
OPTIONS	
Mounting Options	Wall (12" above finished grade)
Dimming	Magnetic Low Voltage
Efficiency*	>95%
Power Factor	>95%
Case TC	90°C max
Protection	Input/Output
Storage	-30°C/+90°C
Humidity	95% RH max
Wet Listed	IP65
WARRANTY**	5 Years

^{*}As a general rule when using LED fixtures, we do not recommend using greater than 70% of specified maximum wattage on the transformer due to inrush current. For assistance, please contact our technical support department.

ORDERING INFORMATION

PRODU	JCT	FIN	ISH
SL680	150W OUTDOOR TRANSFORMER	SS	STAINLESS STEEL
SL681	300W OUTDOOR TRANSFORMER		

150W






300W







^{**}Visit visualcomfort.com for specific warranty limitations and details.

Direct Bury Splice Kit

LANDSCAPE ACCESSORY




SPECIFICATIONS

DIMENSIONS	
Height	3.7" / 94 mm
Width	1.5" / 38 mm 1.1" / 28 mm
MATERIAL	
Material	Impact and UV Resistant Polypropylene
Weight	.13 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL686 DIRECT BURY SPLICE KIT



Intermatic Digital Astronomic Timer

LANDSCAPE ACCESSORY



SPECIFICATIONS

DIMENSIONS	
Height	3.2" / 81 mm
Width	3.3" / 84 mm
MATERIAL	
Material	Plastic
Weight	.4 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL683 INTERMATIC DIGITAL ASTRONOMIC TIMER



Photocell LANDSCAPE ACCESSORY




SPECIFICATIONS

DIMENSIONS	
Height	3.4" / 86 mm
Width	2" / 51 mm
MATERIAL	
Material	Plastic
Weight	.2 lbs
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

SL682 PHOTOCELL



MR11 LED 36° & 60°

LANDSCAPE ACCESSORY

MR11 LED 36°



MR11 LED 60°



SPECIFICATIONS

LAMPING	
Lumens	270
Voltage	12V
Wattage	3W
CRI	90
Color Temperature	2700K
Beam Angle	36°
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

300BLV604 MR11 LED 36°

SPECIFICATIONS

LAMPING	
Lumens	270
Voltage	12V
Wattage	3W
CRI	90
Color Temperature	2700K
Beam Angle	60°
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

300BLV605 MR11 LED 60°

MR16 LED 36° & 60°

LANDSCAPE ACCESSORY

MR16 LED 36°



MR16 LED 60°



SPECIFICATIONS

LAMPING	
Lumens	495
Voltage	12V
Wattage	5W
CRI	90
Color Temperature	2700K
Beam Angle	36°
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT
300BLV602 MR16 LED 36°

SPECIFICATIONS

LAMPING	
Lumens	507
Voltage	12V
Wattage	5W
CRI	90
Color Temperature	2700K
Beam Angle	60°
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT

300BLV603 MR16 LED 60°

G4 LED 1.5W & 5W

LANDSCAPE ACCESSORY

G4 LED 1.5W



G4 LED 5W



SPECIFICATIONS

LAMPING	
Lumens	150
Watts	1.5W
Voltage	12V
CRI	90
Color Temperature	2700K
MATERIAL	
Ceramic and PC	
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT
300BLV600 G4 LED 1.5W

SPECIFICATIONS

LAMPING	
Lumens	550
Watts	5W
Voltage	12V
CRI	90
Color Temperature	2700K
MATERIAL	
Ceramic and PC	
WARRANTY	Lifetime warranty on manufacturer defects in the construction, but normal warranty applies for bulbs, integrated LEDs, and living finishes.

ORDERING INFORMATION

PRODUCT
300BLV601 G4 LED 5W



VISUAL COMFORT

SIGNATURE COLLECTION

MODERN COLLECTION

ARCHITECTURAL COLLECTION

LANDSCAPE COLLECTION

STUDIO COLLECTION

FAN COLLECTION

7400 Linder Avenue Skokie, IL 60077

Phone: 800.969.3347 Fax: 866.490.7765

visualcomfort.com | @visualcomfort