



PURE  EDGE 
LIGHTING



Above TruLine .5A Ceiling Recessed, Linear
Cover Pipeline 1 Modular Suspension with T24 Tubo Large Track Head
Back Cover TruLine .5A with Zip Suspension



OUR MISSION & OUR PRODUCTS

At PureEdge Lighting, our mission is simple: Build the tools that allow our customers to be both the lighting and fixture designer. Today's savvy consumer isn't looking for standard, everyday fixtures. They want personalized, aesthetically pleasing, one-of-a-kind solutions, smart technology and eco-friendly LEDs with a quick ship. PureEdge is ready to deliver.

In this catalog, you'll find an array of forward-thinking fixtures, from Tunable White, TruLine, plaster-in fixture, to TruTrack®, our innovative take on traditional track lighting that recesses in to 5/8" drywall. Each and every PureEdge linear product allows you total freedom to design the lighting you want without worrying about studs or joists. This is why we say "let the drywall be your canvas."

We continuously push the boundaries of traditional lighting design, integrating the most advanced technology and allowing endless creativity and personalization. Our Pipeline® series complements the modern aesthetic of open-ceiling spaces, mimicking the same tubular shape found in exposed pipes and ductwork. Snap together Pipeline pieces and build your dream fixture - up a wall, around a corner, with options for uplighting, downlighting, track heads and pendant fixtures. It's the next evolution of modular lighting, perfect for downtown lofts, urban offices and shared workspaces alike. Our products give you the ability to design in 3D, an exciting new step forward.

Dedicated to the simple notion that light and interior design are truly symbiotic, we have developed a dynamic set of lighting solutions that enable you to personalize your space, design your fixtures, and think outside the bulb.



Gregory Kay, Founder





CEILING RECESSED

Indoor Architectural Lighting and Track Lighting recessed in to 5/8" drywall without joist modification. These 24VDC linear plaster-in LED systems create glare-free lighting and allow you to design the fixture to your specification.

- Up to 95+ CRI
- 3 Lumen Outputs
- 6 Color Temperatures
- Warm Dim and Tunable White
- Remote Power Supply

Let the drywall be your canvas®

LINEAR

Ceiling & Wall Recessed



TruLine .5A



TruLine TruQuad 1A
Aurora Round Truly Trimless Downlight



TruLine*
.5A
0.5" Wide x 0.6" Deep



TruLine*
1A
1" Wide x 0.6" Deep



TruLine*
1.6A
1.6" Wide x 0.6" Deep



Light Channel*
Trim 1.6"
for Wood Ceiling
1.6" Wide x 0.6" Deep



Veil*
3"
3.5" Wide x 0.6" Deep

*Design by Gregory Kay

PERIMETER

Ceiling & Wall Recessed



Verge Ceiling
Aurora Square Truly Trimless Downlight



Verge Corner
Verge Floor

Plaster-In Profiles



Verge*
Ceiling

4" Wide x 0.6" Deep



Verge*
Wall / Floor

4" Wide x 0.6" Deep



Verge*
Corner

2x4" Wide x 0.6" Deep



Verge*
Door

4" Wide x 0.6" Deep

*Design by Gregory Kay

For custom design and layout assistance, send drawings to design@PureEdgeLighting.com

COVE / WALL WASH

Ceiling & Wall Recessed



Reveal Wall Wash



Reveal Cove / Pathway



Reveal*
Wall Wash

1.3" Wide Slot x 0.6" Deep



Reveal*
Cove / Pathway

1.3" Wide Slot x 0.6" Deep

*Design by Gregory Kay

WALL GRAZER

Ceiling Recessed



Stratus



Cirrus



Stratus*
5.5" Wide x 5.6" Deep
Up to 30' Wall



**Nova
with Louver**
1.2" Square, Up to 10' Wall



Cirrus
0.9" Square, Up to 8' Wall



**Light Channel
with Wall Grazer
Lens**
0.7" Wide x 0.4" Deep
For Curtain Sheers / Up to 6'
Wall or Under Counter

*Design by Ben Jacobson

For custom design and layout assistance, send drawings to design@PureEdgeLighting.com


TR24 TRUTRACK®

A revolutionary interpretation on traditional track lighting, TruTrack* is a 24VDC single circuit system that recesses into 5/8" thick drywall, eliminating the need to plan around joists or studs. Make turns across the ceiling, wrap down and across walls creating total flexibility in design. When plastered into the ceiling, a paintable slot cover is slipped into place and painted to match the ceiling, leaving only the track heads visible. A minimalistic re-imagining of track lighting creating an exceptional modern look. Design by Gregory Kay.


*Patent-Pending

KEY FEATURES


- Plaster-In recessed 24VDC Single Circuit Track
- Only as thick as 5/8" drywall
- White Snap-In Cover fills and hides the space between Track Heads. Field cuttable and painted to match ceiling
- Length: 2', 4', 6' and 8', field cuttable
- Color Temperature: Warm Dim; 3000K dims to 2000K and 95 CRI or 3000K Standard Dim
- Wattage: 6 Watts (400 Lumens) to 13 Watts (1150 Lumens)
- T24 Track Head Beam Spreads: 15°, 20°, 40°, 60°
- T24 Track Heads rotate 360° and tilt 180°
- Remote Power Supply

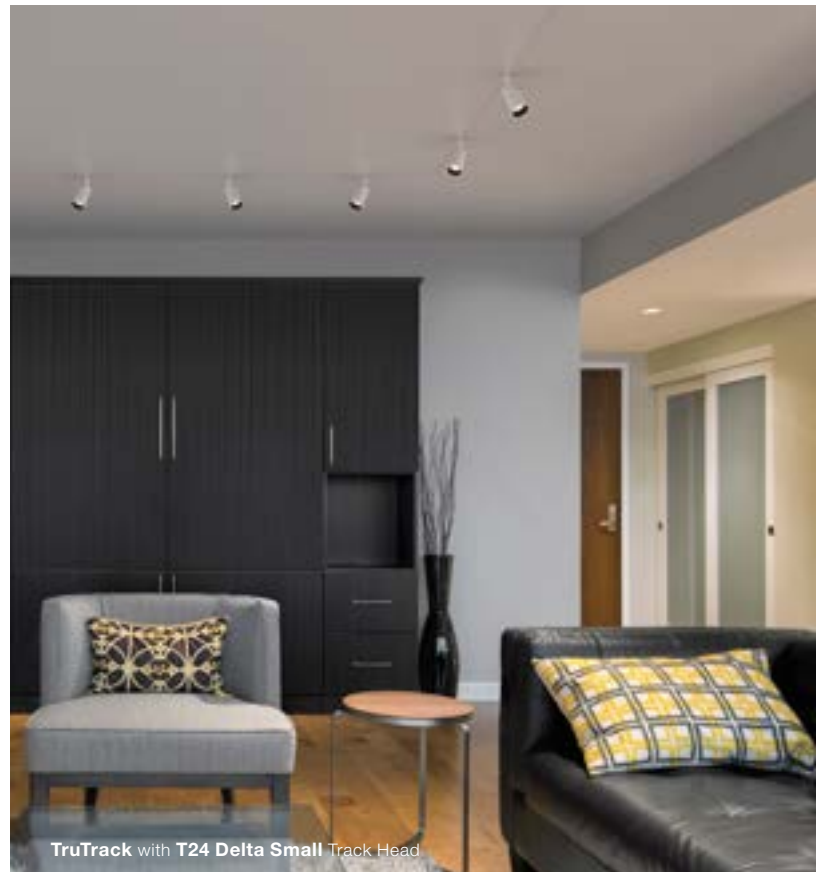

TruTrack with T24 Delta Small Track Head

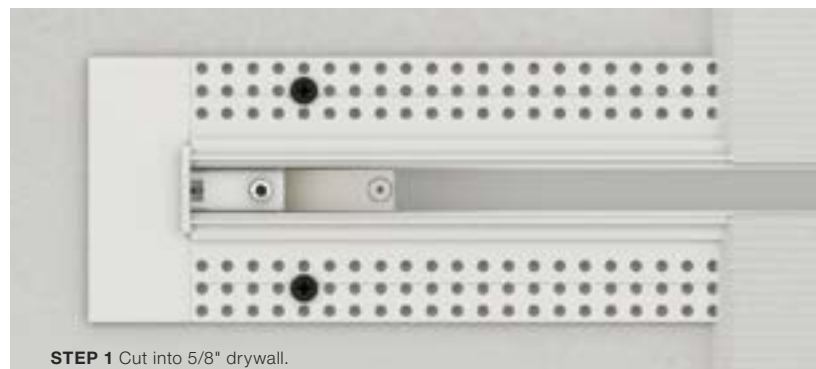

STEP 1 Cut into 5/8" drywall.

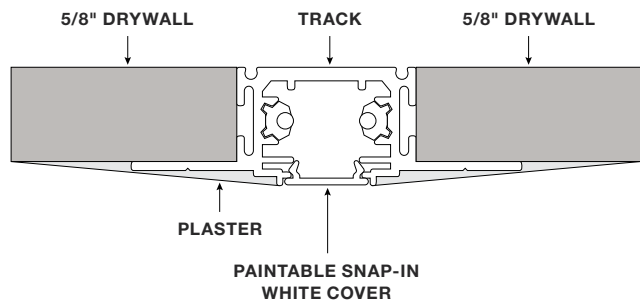



TruTrack with T24 Delta Small Track Head



STEP 2 Plaster.



STEP 3 Paint ceiling & add T24 Track Heads & White Plastic Cover.



T24 Radiant Large
1080 Lumens / 13 Watts
3.4" Wide x 5.1" Height



T24 Radiant Medium
720 Lumens / 9 Watts
2.8" Wide x 4.6" Height



T24 Tubo Large
1150 Lumens / 13 Watts
2.3" Wide x 7.6" Height



T24 Tubo Small
400 Lumens / 6 Watts
1.6" Wide x 6.3" Height



T24 Delta Small
500 Lumens / 6 Watts
2" Wide x 5.7" Height

TR24 TRUTRACK®




with LED Soft Strip & Lens

For a complete contemporary look of geometric ambient lighting and focused accent effects, combine TruTrack* with a sleek line of light using our versatile 24VDC linear plaster-in LED system. The TruTrack and Soft Strip can be switched and dimmed together as single circuit, or switched and dimmed separately as a 2-Circuit. The LED Soft Strip matches the color and warm dimming features of the Track Heads. Design by Gregory Kay.

*Patent-Pending


KEY FEATURES

- Plaster-In recessed 24VDC Single Circuit Track
- Only as thick as 5/8" drywall
- White Snap-In Cover fills and hides the space between track heads. Field cuttable and painted to match ceiling
- Length: 2', 4', 6' and 8', field cuttable
- Color Temperature: Warm Dim; 3000K dims to 2000K and 95 CRI or 3000K Standard Dim
- Wattage: 6 Watts (400 Lumens) to 13 Watts (1150 Lumens)
- T24 Track Head Beam Spreads: 15°, 20°, 40°, 60°
- T24 Track Heads rotate 360° and tilt 180°
- Soft Strip: 5 Watts/Foot, 365 Lumens/Foot, 73 Lumens/Watt
- Remote Power Supply

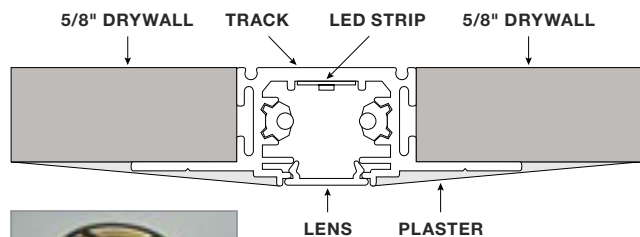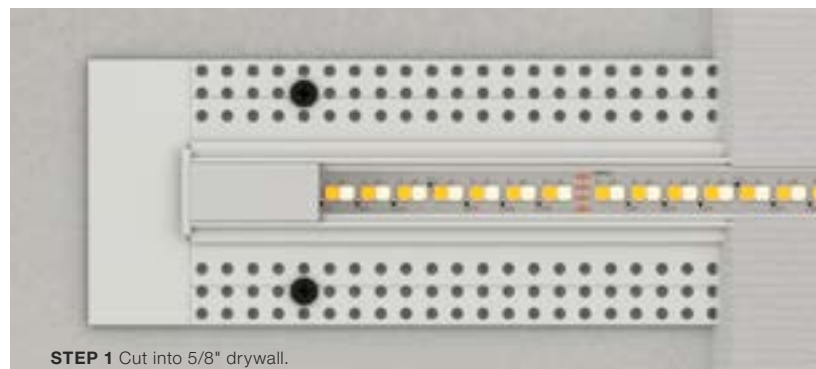



TruTrack with LED Soft Strip & Lens
T24 Delta Small Track Head

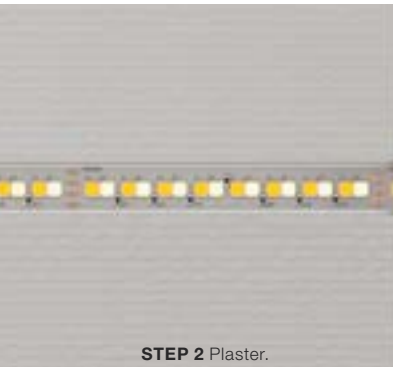

STEP 2 Plaster.



STEP 3 Paint ceiling & add Soft Strip, T24 Track Heads & Lens.



T24 Radiant Large
1080 Lumens / 13 Watts
3.4" Wide x 5.1" Height



T24 Radiant Medium
720 Lumens / 9 Watts
2.8" Wide x 4.6" Height



T24 Tubo Large
1150 Lumens / 13 Watts
2.3" Wide x 7.6" Height



T24 Tubo Small
400 Lumens / 6 Watts
1.6" Wide x 6.3" Height



T24 Delta Small
500 Lumens / 6 Watts
2" Wide x 5.7" Height

TRULY TRIMLESS DOWNLIGHT

Ceiling Recessed



Aurora Round Truly Trimless



Aurora Square RGB Truly Trimless
Empire State Building, New York, New York




**Aurora Round
Truly Trimless***
3.5" Round



**Aurora Square
Truly Trimless***
3.5" Square



**Aurora Round RGB
Truly Trimless***
3.5" Round

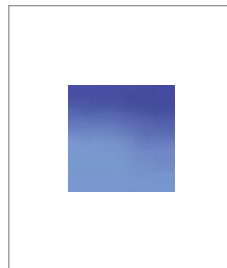

**Aurora Square RGB
Truly Trimless***
3.5" Square




**Aurora
Truly Trimless
Detail**

*Design by Gregory Kay

DOWNLIGHT / WALL WASH

Ceiling Recessed

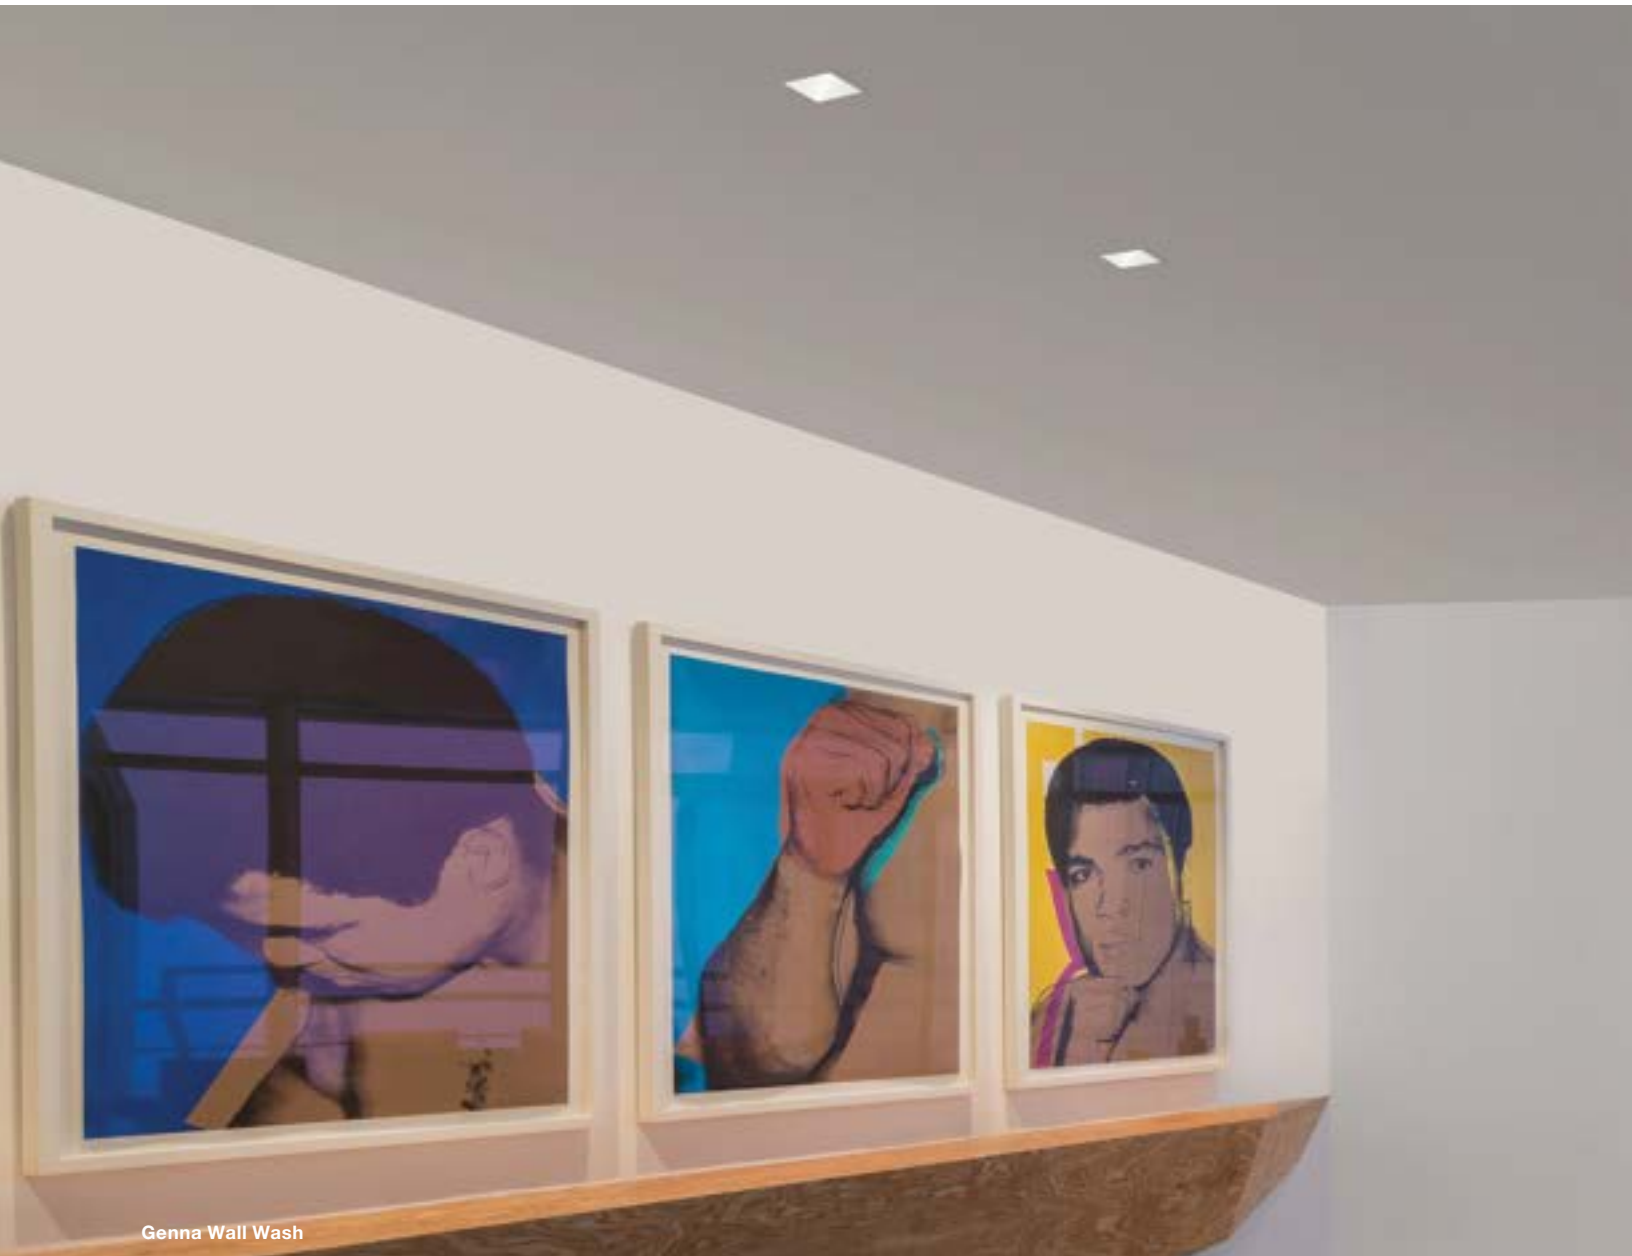

Genna Wall Wash



**Aurora Round
Flangeless**
3.5" Round



**Aurora Square
Flangeless**
3.5" Square



**Genna
Wall Wash**
3.5" Square





CEILING SURFACE

Indoor and outdoor Architectural Lighting Channels can be personalized to fit your needs. These 24VDC linear LED systems diffuse clean lines of lighting and allow you to design the fixture to your specification. Available in four different lumen outputs, nine color temperatures, including Warm Dim and Tunable White, up to 97 CRI, five finishes, and ordered by the inch.

LINEAR

Ceiling Surface



Cirrus D1



Zip
0.7" Square



Cirrus D1 / S1
0.9" Square



Cirrus T1
0.9" Wide x 1.3" Height



**Nova
with Louver**
1.2" Square



Pipeline 2
1.2" Round

WALL WASH

Ceiling Surface



Cirrus



**Cirrus
with L-Shield**

0.9" Square Fixture
2.5" Shield Height

MODULAR

Ceiling Surface



Zip*
0.7" Square



Cirrus D1*
0.9" Square



Cirrus S1*
0.9" Square



Nova*
1.2" Square

*Design by Gregory Kay

T-BAR MODULAR

Ceiling Surface



Cirrus



**Cirrus
with or without
Louvers**

0.9" Square

TS24 TRACK SURFACE

Ceiling Surface



TS24 Track Surface with T24 Radiant Medium Track Heads



T24 Radiant Large
1080 Lumens / 13 Watts
3.4" Wide x 5.1" Height



T24 Radiant Medium
720 Lumens / 9 Watts
2.8" Wide x 4.6" Height



T24 Tubo Large
1150 Lumens / 13 Watts
2.3" Wide x 7.6" Height



T24 Tubo Small
400 Lumens / 6 Watts
1.6" Wide x 6.3" Height



T24 Delta Small
500 Lumens / 6 Watts
2" Wide x 5.7" Height

MONOPOINT / MULTIPOINT

Ceiling Surface



2" Round Monopoint with Piston Head



4" Round Multipoint, 2-Port Canopy with Piston Head



**Monopoint
2" Round Canopy
with Piston Head**
2.7" Round Canopy
650 Lumens



**Multipoint
4" Round
2-Port Canopy
with Piston Head**
4.6" Round Canopy



**Multipoint
12" Rectangle
2-Port Canopy
with Piston Head**
13" Length x 5.8" Wide
x 1.9" Height Canopy



**Multipoint
12" Rectangle
3-Port Canopy
with Piston Head**
13" Length x 5.8" Wide
x 1.9" Height Canopy



**Multipoint
12" Round
3-Port Canopy
with Piston Head**
12" Round
x 1.9" Height Canopy

MONORAIL

Ceiling Surface



2-Circuit Monorail with Everest Pendant



Monorail with Rebel Heads



Piston LED Head
1.8" Wide x 3.3" Height
650 Lumens



Scope LED Head
2.1" Wide x 4" Height
350 Lumens, Adjustable Lens



Rebel MR16 Head
3.7" Wide x 2.3" Height



Form MR16 Head
2.2" Round & Square



Spirit MR16 Head
3" Wide x 1.1" Height

FAST JACK

Ceiling Surface/Suspension



2-Circuit Monorail with Rebel Heads & Cirrus R1 Suspension



**Bubble Ball
Pendant**
3.9" Wide



**LED Pipe
Pendant**
1.2" Wide x 13.8" Height



**K2
Pendant**
1.2" Wide x 26" Height



**Fast Jack Canopies
Round & Square**
4"-24" Round & Square



**Cirrus T1 / R1 / D1
Suspension**
0.9" Square, D1
0.9" Wide x 1.3" Height, T1
0.9" Wide x 1.5" Height, R1





SUSPENSION

Indoor Architectural Lighting Suspension Channels can be personalized to fit your needs. These 24VDC linear LED systems create glare-free lighting and allow you to design the fixture to your specification. Available in two lens options, four different lumen outputs, nine color temperatures, including Warm Dim and Tunable White, up to 97 CRI, and five finishes up to 10' long. Design by Gregory Kay.

PIPELINE®

Designed with a modern aesthetic, Pipeline* complements the shapes found in open-ceiling spaces, seamlessly blending with existing pipes and ducts, rather than following the traditional square design that most modular systems offer. For an extra touch of brightness, you can also build the system with adjustable 24VDC Track Heads and Pendants, creating the perfect combination of direct, indirect, and accent lighting sources. With 360° locking channel rotation, and a series of connectors that allows the system to turn corners and climb walls, Pipeline provides a complete solution for lighting designers that enhances personalization and simplifies installation.

Design by Gregory Kay.

*Patent-Pending

KEY FEATURES

- 360° rotatable Channel for direct / indirect illumination
- High Output, up to 916 Lumens/Foot
- 95+ CRI
- Easy installation with Push-In Connectors
- Modular L, T, X, Y, and Flexible Connectors
- Remote Power Supply, up to 200 Watts before re-feeding

PERSONALIZATION OPTIONS

- Louvers: Black or White
- Length: 3" to 120"
- Finishes: Satin Nickel, Chrome, Powder Coat Painted Black, White, or Custom
- Wattage: 5, 7, or 10 Watts/Foot
- 9 Color Temperatures: 2400K-5700K, 2700K (27D) and 3000K (30D) Warm Dim



Pipeline 1 Modular Suspension



White Louver
Satin Nickel shown



Push-On End Cap
Black shown



Push-In L-Connector
White shown



Pipeline 2 Suspension



Pipeline 1
176° Lens
Suspension, Linear Channel



Pipeline 2
280° Lens
Suspension, Linear Channel



Pipeline 1 & 2
Suspension, Modular



MIYO Pipeline 1 & 2
Suspension, Chandelier



T24 Radiant Large
1080 Lumens / 13 Watts



T24 Radiant Medium
720 Lumens / 9 Watts



T24 Tubo Large
1150 Lumens / 13 Watts



T24 Tubo Small
400 Lumens / 6 Watts



T24 Delta Small
500 Lumens / 6 Watts

MODULAR

Suspension




Cirrus D1



Cirrus D1
0.9" Square



Nova

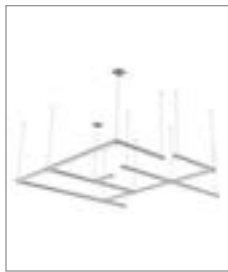

Nova
1.2" Square



Nova
Up / Down
1.2" Wide x 2.2" Height

CHANDELIER

Suspension




Tie Stix Pix Stick, Metal

Up to 10' long including Warm Dim and Tunable White



Pix Sticks Tie Stix
Wood
1.2" Square



Pix Stick Cirrus
0.9" Square



Pix Sticks Pipeline
1.2" Round



MIYO Nova, Satin Brass

Up to 10' long including Warm Dim and Tunable White



MIYO Cirrus
0.9" Square



MIYO Nova
1.2" Wide x 2.2" Height



MIYO Pipeline
1.2" Round

LINEAR CHANNEL

Suspension



Center Feed or End Feed. Remote or Surface Canopy. Up to 10' long including Warm Dim and Tunable White



Zip
0.7" Square



Zip Wave
0.7" Square



Cirrus D1
0.9" Square



Cirrus R1
0.9" Wide x 1.5" Height



Cirrus T1
0.9" Wide x 1.3" Height



Cirrus D1

Center Feed or End Feed. Remote or Surface Canopy. Up to 10' long including Warm Dim and Tunable White



**Cirrus
Wall Wash**
0.9" Square



Nova
1.2" Square



**Nova
Up / Down**
1.2" Wide x 2.2" Height



Pipeline 1
1.2" Round



Pipeline 2
1.2" Round

LINEAR CHANNEL

Suspension



Available in Down or Up/Down, Center or End Feed. Up to 10' long including Warm Dim and Tunable White



Glide Wood

1.7" Wide x 2.5" Height



Glide Glass

1.7" Wide x 2.5" Height



Tie Stix



Tie Stix

Up to 10' long including Warm Dim and Tunable White



Tie Stix Detail



Tie Stix, Wood with Piston Head
1.2" Square



Tie Stix, Metal
1.2" Square

SOFT LINE

Suspension



Floats Wall to Wall



Soft Line White*

1.3" Wide



Soft Line RGB*

1.3" Wide

*Design by Derek Porter







WALL


PureEdge Lighting has many idea inspiring products that provide an excellent balance of form and function. High performance lighting with contemporary style that bring the ideal hues and temperatures to bathrooms, vanities and bedrooms. Beautiful fixtures personalized to fit the size and light qualities to enhance your environment. Idea inspiring products that can accentuate any wall in your home.

DISPLAY

Wall



Pipeline
1.2" Round

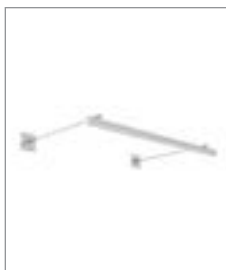

Angle
1.4" Square



Kurve
1.4" Round

WALL

Wall



Regal



Tie Stix Wall 2-Light



Regal

24" Wide x 3.3" Deep



Alpha

4.3", 6.5", 16", 24" Wide
x 4" Deep



TV

5" Wide x 1.7" Deep



Tie Stix 1-Light

1.2" Square
x 12"-46" Length



Tie Stix Wall 2-Light

1.2" Square
x 15"-70" Length

VANITY

Wall




Bardot



Twiggy S1

Up to 10' long included Warm Dim and Tunable White

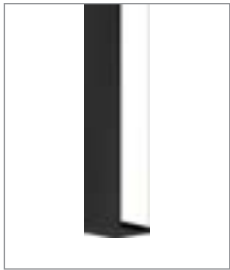

Twiggy
0.2" Square



Audrey
1.4" Square



Bardot
1.4" Round



Tie Stix
1.2" Square



Pipeline
1.2" Round


MIRRORS

Wall



Plaza Large Mirror

Custom Mirrors available, minimum order 50

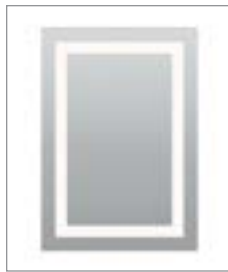

Plaza Mirror

27.5" Wide x 2.2" Deep, LG
27.8" Wide x 1.9" Deep, SM



Twin Slim

19.8" Wide x 2.1" Deep



Sail Mirror

25" Wide x 2.4" Deep





LED STRIPS & CHANNELS

PureEdge Lighting LED Soft Strip technology has a versatile range of uses, allowing you to create the environment of your choice, from subtle and inviting to dramatic and eye catching. Soft Strip is a flexible, low voltage linear strip perfect for above and below cabinets, shelves, coves, and toe kicks. Soft Strip is available in a wide range of standard color options for flexibility in design, as well as Warm Dim for incandescent emulation, and Tunable White for the freedom to choose any color temperature at any time.

- 9 White and 6 Color Temperatures
- 5oz Copper Circuit Board
- Tight LED Spacing
- Solderless Snap Connectors
- Field Cuttable


TUNABLE WHITE

SS5C 2K4K LED Soft Strip

PureEdge Lighting's Tunable White LED technology allows the creation of a wide range of moods within any room with the touch of a fingertip. Choose a bright, active 4000K to mimic full daylight or tune to a warm, cozy 2000K suggestive of sunrise and sunset. Tunable White brings complete color temperature control to interior environments, giving you twilight in the middle of the afternoon, or the bright midday sun in the dead of night.



COLOR TEMPERATURE		ENVIRONMENT	EMOTION
Daylight	5700K	Atrium / Display / Security	Invigorating
Cool White (Fluorescent)	4000K	Gym / Office	Vibrant
Neutral White (Fluorescent)	3500K	Gym / Office	Alert
Warm White (Halogen)	3000K	Home / Gallery	Balance
Incandescent White	2700K	Home / Restaurant	Relaxed
Very Warm White (Low Wattage Incandescent)	2400K	Home Dining / Restaurant	Cozy
Candle White	2200K	Home Dining / Restaurant	Wooing
Amber White	2000K	Sunrise / Sunset	Romance

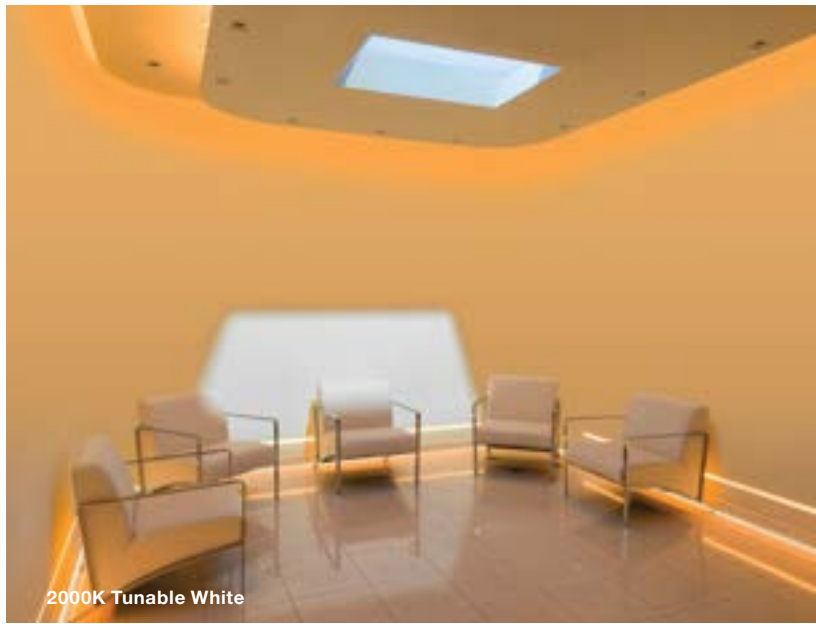


STATIC WHITE STANDARD LEDS (20K, 22K, 24K, 27K, 30K, 35K, 40K, 50K)

- Best used in non-dim applications, Static White LEDs maintain the same color temperature at all times
- Dimming these standard LEDs results in what is known as a "Cold Dim", an unpleasant hue and lumen output akin to the sky prior to a bad storm
- Ideal applications include Gyms, Offices, and Laundry Rooms
- Title 24




WARM DIM (27D & 30D)

- Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of Incandescent and Halogen light sources
- Warm Dim gives that warm glow of candlelight at 2000K
- Best used for ambient light in Homes, Restaurants, Kitchens, and Bedrooms

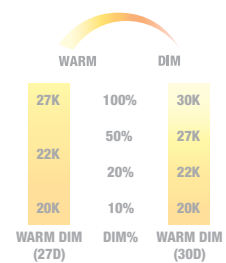

TUNABLE WHITE (2K4K)

- Tunable White offers the greatest flexibility to choose any color temperature to personalize your environment. Dial up the brightness to a Blue White Light (4000K) during the day to keep you more alert, and then relax at dusk with the Amber Glow of sunset lighting (2000K)
- Under 2000K hue, our skin looks better than ever – it's what photographers call "The Golden Hour". This will also help keep your Circadian Rhythm in sync for a productive day and a better night's sleep
- Ideal applications include Residential, Restaurants, Hotels, Dressing Rooms, Bathrooms, Living Rooms, Bedrooms, and Outdoor



SOFT STRIP

LED Strips & Channels



SS2C LED Soft Strip



SS2P LED Soft Strip with TruLine .5A Ceiling Linear

Premium-grade 5oz. Copper enable runs up to 40'



Static White



Warm Dim



Twist Strip



4000K Tunable White



2000K Tunable White

Premium-grade 5oz. Copper enable runs up to 40'



Tunable White



RGB



RGB+W



Neon Flex

SURFACE MOUNT CHANNELS DIY / FINISHED PRODUCT

LED Strips & Channels



Light Channel .6" Recessed Millwork



Light Channel Micro Grazer



**Light Channel
0.3"**
0.7" Wide x 0.4" Deep



**Light Channel
0.6"**
0.7" Wide x 0.6" Deep



**Light Channel 0.6"
Recessed Millwork**
0.7" Wide x 0.6" Deep



**Light Channel
45°**
0.9" Square



**Light Channel 0.6"
Micro Grazer**
0.7" Wide x 0.8" Deep

RECESSED MILLWORK / SHELF LIGHTING

LED Strips & Channels



Light Channel Trim 1.6"



Zip Shelf



Light Channel .6" Recessed Millwork



Zip Shelf
0.7" Square



Light Channel 0.6" Recessed Millwork
0.7" Wide x 0.6" Deep



Light Channel Trim 1.6"
1.6" Wide x 0.6" Deep

OUTDOOR TRACK

Outdoor Track* offers the flexibility of track lighting in an exterior environment. Similar to indoor track, it features an aluminum U-Shaped Channel with outdoor-rated, 2-Circuit cable wire running through it, and can be mounted outdoors vertically or horizontally. Outdoor Track is a 12 volt, low voltage system that installs without the need for conduit pipe, minimizing installation cost. This system is wet location rated, and is suitable for patios, backyards, or outdoor restaurants and bars.

Track parts, transformers, compatible dimmers, and lamps are sold separately.

*Patent-Pending

KEY FEATURES

- Uses 12VAC low voltage wiring without the need for conduit pipe
- 2-Circuits for design flexibility
- Remote Power Supply; 12VAC up to 300 Watts and 40' before re-feeding
- The Micro Surface Track Head rotates 360° and tilts 180°
- Accepts 12 Volt LED MR16 Lamp, up to 8 Watts or a 12 Volt Halogen MR16 Lamp, up to 50 Watts
- PureEdge Lighting's SOL-Light is recommended

PERSONALIZATION OPTIONS

- Finishes: Black and White





White



Black



With Snout in White



With Snout in Black

OUTDOOR

Recessed & Surface



Port Step Light



**Miniport
Wall / Step Light**
2" Round



**Port
Wall / Floor /
Step Light**
4.3" Round / Square



Cube-O
4" Square



TV
5" Wide x 1.7" Deep



Sun 3
Wall / Floor Light
4.3" Round / Square

SOL-LIGHT WARM DIM

SOL-Light Warm Dim LED replacement lamps automatically shift to warmer color temperatures when dimmed. Choose from two LED color temperatures, crisp 3000K like Halogen or warmer 2700K similar to Incandescent. Use a standard dimmer to experience a warmer 1800K for more relaxing light. Ideal for personal spaces like dining and family rooms. From work to home entertaining, SOL-Light allows you to pick the lighting temperature most suitable to your needs.

KEY FEATURES

- Direct replacement for 12VAC, 50 Watt Halogen
- 8 Watts, up to 468 Lumens
- 95+ CRI, 96+ R9, Rf 94, Rg 101.2
- Beam angles 24° or 36°
- Low blue emission for healthy vision
- Less than 1% flicker
- 30,000 hours rating
- Suitable for damp locations
- Title 24


SOL-Light® Warm Dim




**SOL-Light
Warm Dim**
3000K dims to 1800K
2700K dims to 1800K





3000K




1800K

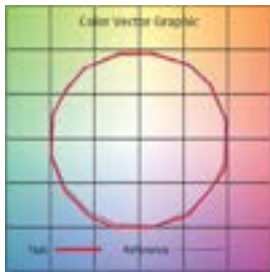

Rf: 94.2
Rg: 101.2
3000K

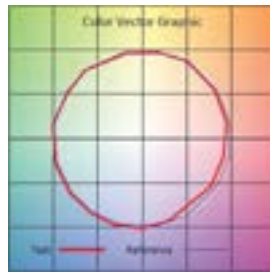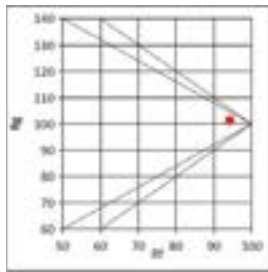

Rf: 91.8
Rg: 96.9
1800K

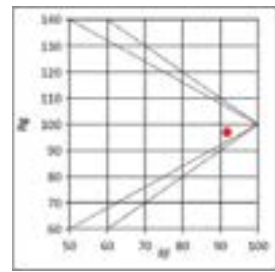



PURE **EDGE** **E**
LIGHTING

1718 W. Fullerton Ave.
Chicago, IL 60614

(773) 770-1195
PureEdgeLighting.com